



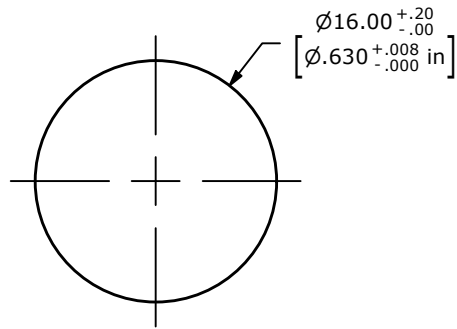


RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 10mm

- ○ - ○ - ○ -
▲ **LAMP INDICATOR**
CONTACT CONFIGURATION

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. OPERATING TEMP.: -40°C to 85°C
4. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 5. ILLUMINATION COLOR: RED (FORWARD), GREEN (REVERSE)
- ▲ 6. ILLUMINATION BASE RATING: 1.8V (FORWARD), 2.8V (REVERSE)
- ▲ 7. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
8. INGRESS PROTECTION: IP65

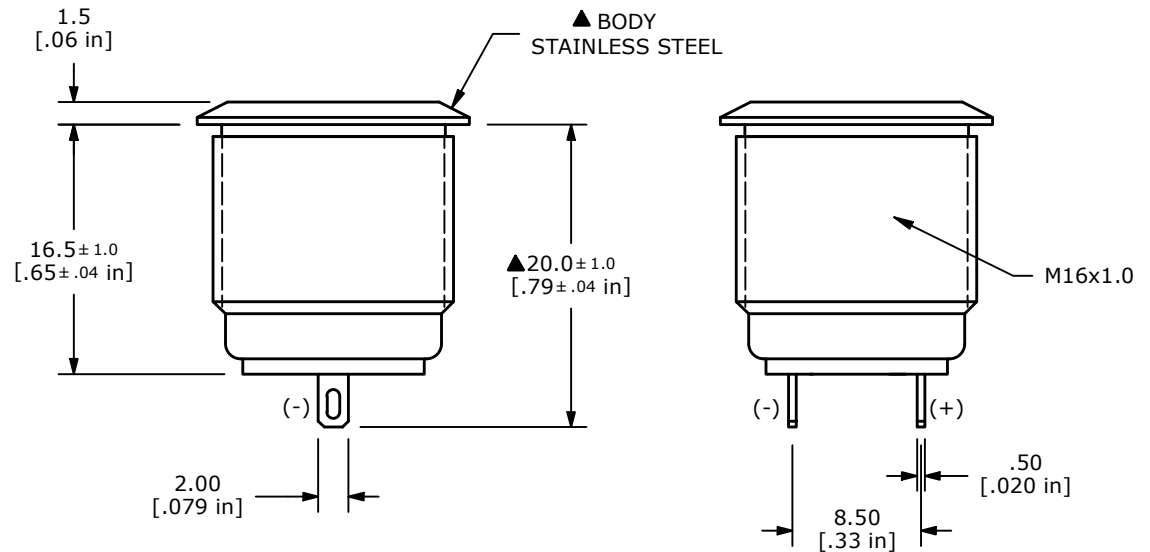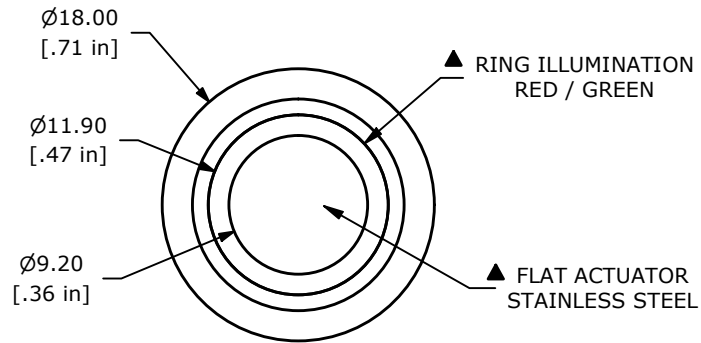

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
B	ECO-103484	PRINT UPDATE	06/27/25	JS	TITLE PV6F2PXSS-3G1				000002899
					SCALE	DATE	DR	DWG	REV
					2:1	9/21/2015	MW	52-PV6F2PXSS3G1	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED