

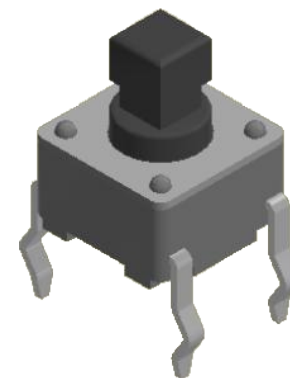




P.C. MOUNTING

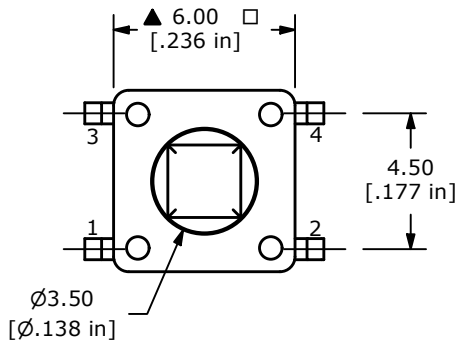

CIRCUIT: SPST ▲

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. TOLERANCE: X.X $\pm$ 0.4
X.XX $\pm$ 0.25
4. RATING: 50mA @ 12VDC
5. TRAVEL: 0.25mm +0.2/-0.1mm
- ▲ 6. OPERATING FORCE: 100 $\pm$ 50gf
7. ELECTRICAL LIFE: 100,000 CYCLES MIN.
8. CONTACT RESISTANCE: 100m Ω MAX.
- ▲ 9. CONTACT MATERIAL: SILVER
10. ▲ DENOTES CRITICAL PARAMETER
11. OPERATING TEMP: -40°C TO 85°C

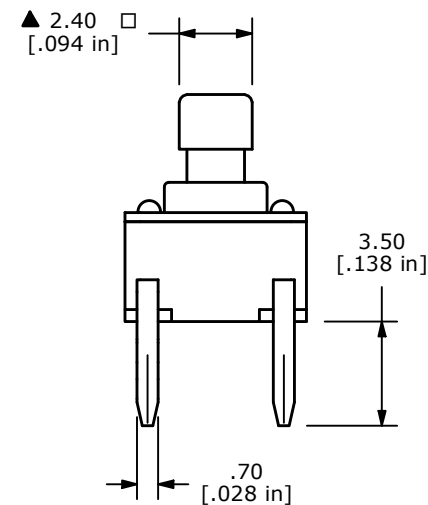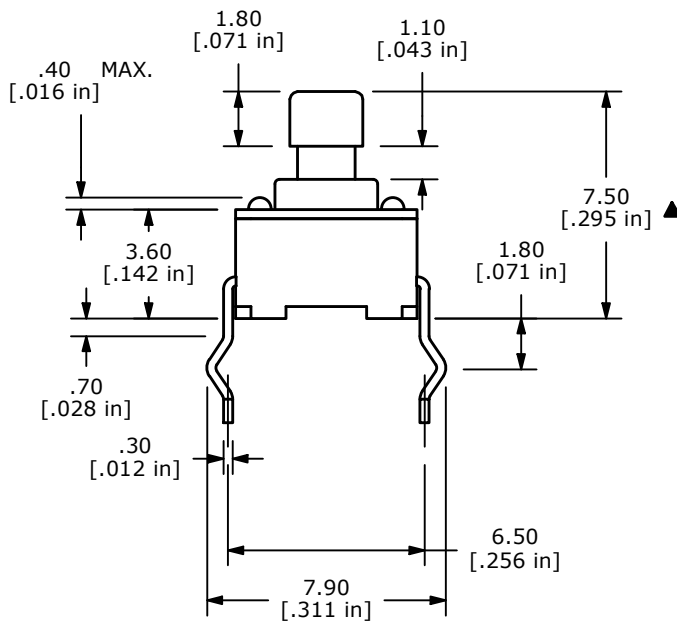

B	24547	CHANGE OPERATING TEMPERATURE	10/6/20	JM
A	10518	RELEASED FOR PRODUCTION		
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E SWITCH®

TITLE	TL1105TF100Q
-------	--------------

SCALE 4:1

DATE 2/1/2000

DR	MM
----	----

DWG	P010211
-----	---------

REV
B