

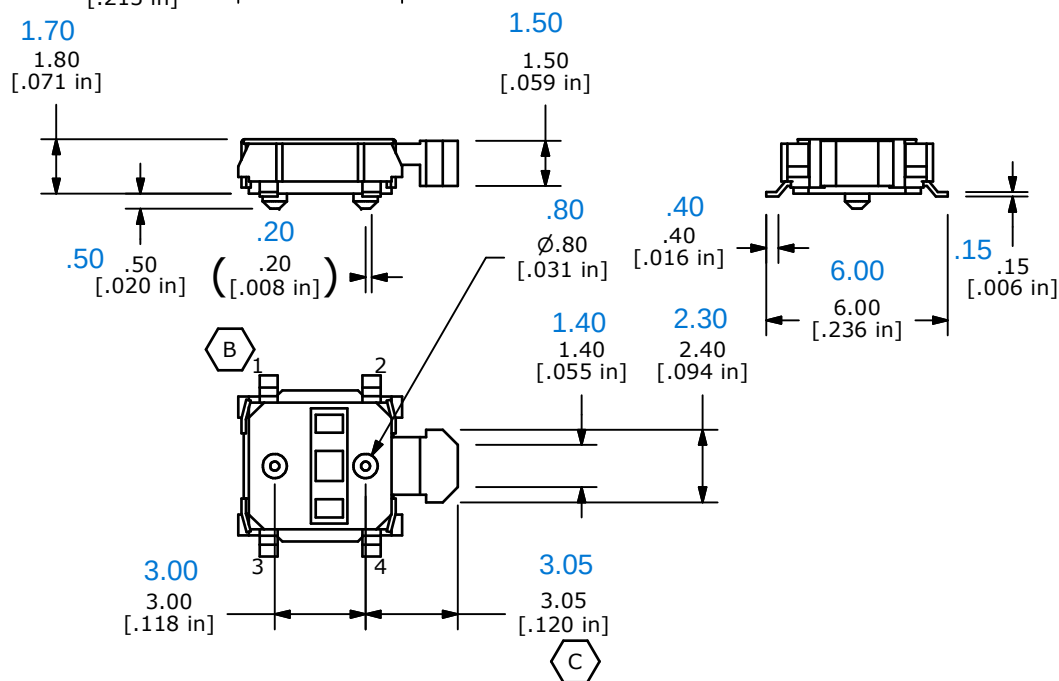



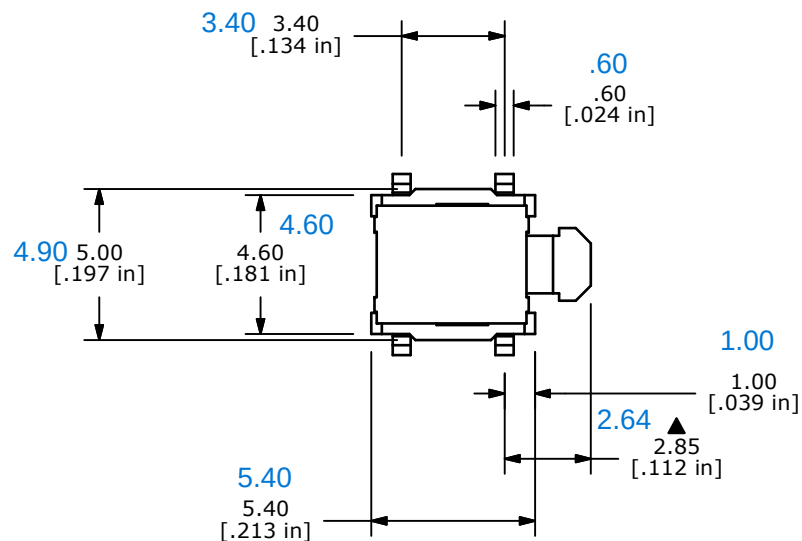

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
5. OPERATING FORCE: 180 +80/-40 gms
6. TRAVEL: 0.3mm ±0.15
7. CONTACT RESISTANCE: 500 MILLI OHMS MAX. (INITIAL)
8. INSULATION RESISTANCE: 100M OHMS AT 500 VDC
9. DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE
10. MECHANICAL/ELECTRICAL LIFE 50,000 CYCLES MIN.
11. PACKAGE: TAPE AND REEL - 2,000 PIECES PER REEL.
12. ▲ DENOTES CRITICAL PARAMETER
13. 2002/95/EC (ROHS) COMPLIANT
14. OPERATING TEMP: -40°C TO +85°C



E-SWITCH®

SCALE	DATE 7/23/2012	DR RC	DWG P010961	REV C
-------	-------------------	----------	----------------	----------