



Ø0.90 (4 PL)

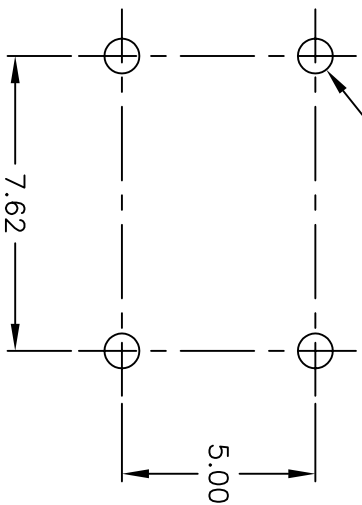

RECOMMENDED P.C.B. LAYOUT





CIRCUIT: SPST

CONTACT CONFIGURATION



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. OPERATING FORCE: 130±40gf
5. TRAVEL TO MAKE: 0.3mm +0.4/-0.0
6. RATING: 30ma, @12V DC
7. CONTACT RESISTANCE: 50 MILL-OHMS (initial)
8. DIELECTRIC STRENGTH: 300V RMS min at sea level.
9. ELECTRICAL LIFE CYCLE: 400,000 make & break cycles at full load.
10. INSULATION RESISTANCE: 100Mega-Ohms min
(Between internal contacts).

11. CONTACT BOUNCE: 10ms
12. OPERATING TEMP. -40°C to 80°C
13. ▲ DESIGNATE MAJOR FEATURE:

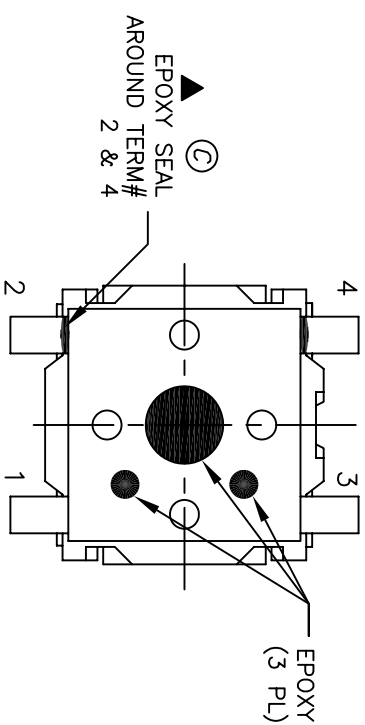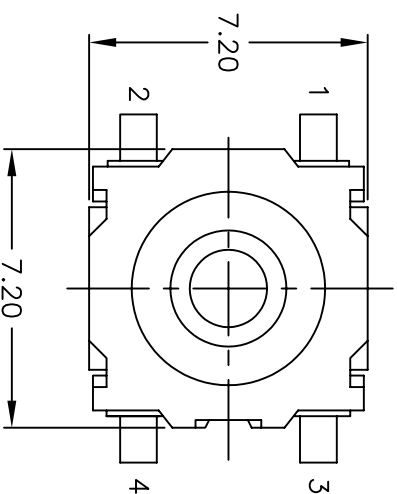

BOTTOM VIEW

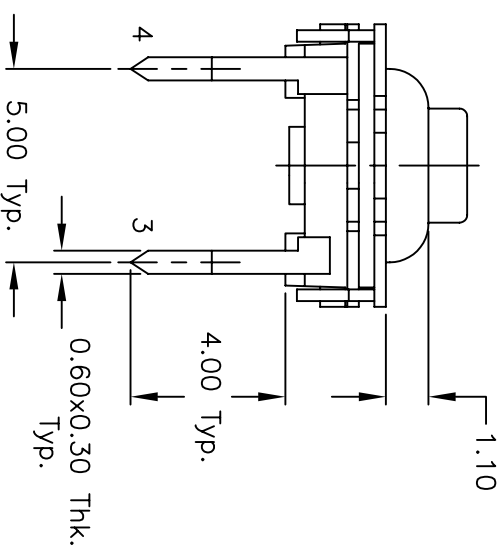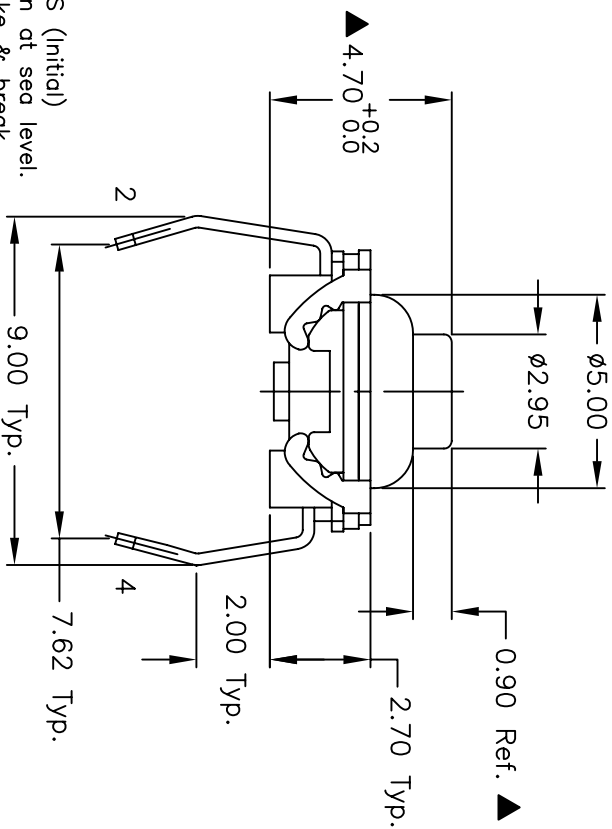

E-SWITCH®				
TITLE				
GS 4.70 F130 QP				
SCALE		DATE		DR
5:1		10/2/98		MM
DWG			REV	
L 400000			E	