



COMMAND SWITCHES

AR22 • DR22/AR30 • DR30 AH164•AH165-2

16mm/22mm/30mm Diameter













Preface

Fuji Electric manufactures FUJI COMMAND SWITCHES-pushbutton, illuminated pushbutton, and selector switches, and pilot lights.

FUJI COMMAND SWITCHES are used in machine tools, industrial machines, control panels, distribution panels, and instrumentation panels both in Japan and overseas.

COMMAND SWITCHES improve interfacing with better layout and wiring, easier installation, and increased safety. Raliability is of course, built in to handle complex multifunctional control.

Table of Contents		Page
	Command Series General Information	1
AR22 and DR22 series	General Information	2
	Quick Reference Guide	3
	Part Number System	7
	Ratings and Specifications	12
	Illuminated Pushbuttons	17
	Pushbuttons	20
	Emergency Stop Pushbuttons	23
	Emergency Stop Illuminated Pushbuttons	24
	Selector Switches	
	Illuminated Selector Switches	32
	Pilot Lights	34
	Joy Stick Selector Switches	
	Buzzers	
	Dimensions	40
	Notes on Use	
AR30 and DR30 series	General Information	
7 11.00 0.110 0.1100	Quick Reference Guide	
	Part Number System	
	Ratings and Specifications	
	Illuminated Pushbuttons	
	Pushbuttons	
	Emergency Stop Pushbuttons	
	Emergency Stop Illuminated Pushbuttons	
	Selector Switches	
	Illuminated Selector Switches	
	Pilot Lights	
	Joy Stick Selector Switches	
	Buzzers	
	Dimensions	
	Notes on Use	
	Accessories	
	Special Products	
ALI404 ALI405 LALI405 0	Mass	
AH164, AH165 and AH165-2	General Information	
	Quick Reference Guide	
	Part Number System (AH164, AH165)	
	Ratings and Specifications	
	Illuminated Pushbuttons	
	Pushbuttons	
	Selector Switches	
	Pilot Lights	
	Buzzers	
	Mounting Space	
	Part Number System (AH165-2)	
	Ratings and Specifications	154
	Illuminated Pushbutton Switches	155
	Pushbutton Switches	158
	Selector Switches	160
	Pilot Lights	164
	Mounting Space	
	Notes on Use (AH164, AH165 and AH165-2)	166
	Accessories (AH164, AH165)	
	Accessories (AH165-2)	
	Accessories	
	Mass	
	AH-series Pushbutton Cross to AR-series Pushbutton	
Taurana and Canaditiana of Cala		104



Command Series General information

■ Command series

AR22/DR22



AF94-320

- 22mm diameter hole
- · Mountable even on panel cutout 25mm in diameter.
- Provided with newly developed release arm
- · Provided with terminal cover for safety and security
- UL, CSA, TÜV and CCC approved



AF94-310

AF98-88

AH164, 165



- 16mm diameter hole, finger-sized button
- · Incandescent, neon and LED lamps are available.
- Block type contact
- AH165 series is oil-tight UL, CSA, TÜV and CCC approved



AR30/DR30



- · 30mm diameter hole
- · Provided with terminal cover for safety and security
 • UL, CSA, TÜV and CCC approved





- AF87-211
- 16mm diameter hole
- · AH165-2 series are about twice as large as the AH165 series
- Incandescent, neon and LED lamps are available.
- Block type contact
- AH165-2 series is oil-tight
- UL, CSA, TÜV and CCC approved







AF87-208


AR22 and DR22 General information

The AR22 now uses a release arm with a wedge mechanism developed by Fuji Electric FA. This enables you to mount or remove the operator and contact block without using any tools. When fitting the switch to a panel, you can ignore the panel thickness.

You have only to secure the operator with a locking nut from behind the panel without any need for adjustment. The improved locking nut is capable of mounting the operator in both 22.3mm and 25.5mm dia. panel cutout holes.


■ Features Facilitated mounting

- No adjusting of panel thickness is necessary.
- The button and lens can be mounted on a panel while the operator is engaged.
- Mountable even on a panel cutout 25.5mm in diameter.



Miniaturization


- Pushbuttons and selector switches with 1NO+1NC: 41mm deep Pilot lights: 37mm deep
- The transformer now occupies far less space.





Easy replacing contact block and transformer

- Because of a snap-on mounting, replacement or addition of the contact block and transformer unit is very simple.
- The contact block is common to all the pushbuttons of this series.
- Contact block is easily replaced even when the pushbuttons are mounted closely together.
- Replacement of the contact block can be done with a screwdriver, without the need for any special tool.



Wiring

- · Wiring from two directions is possible.
- Wiring in both vertical and lateral directions facilitates wiring in narrow spaces.
- Color coding of contact blocks makes wiring easy.
 1NO: Blue, 1NC: Red Lamp terminal and transformer unit: Black

Safety

- A terminal cover is provided, assuring safety and security.
- FUJI's original Trigger Action mechanism is used in the emergency stop pushbuttons. They are suitable for emergency stop and safety. This mechanism prevents the contacts from moving until the button is pushed and locked.
- Reliability of safety functions increased by integrated operator and contact block construction. (AR22VG)

Protection

- Excellent oil-tight construction (IP65) of the operator.
- Closure of the contact block has been improved.

■ Approvals





Pushbuttons/Selectors/Pilot Lights/Buzzers AR22 and DR22

Quick reference guide

■ Illuminated pushbutton switches

Operator	Type	Operator	Type	Operator	Туре
Flush round head	AR22F0L, F5L	Extended with full guard (24mm dia. with openings)	AR22G2L, G7L	Flush round head with square bezel	AR22F0P, F5P
(€ (€ (((()	AF94-318	ⓑ ♠(€@	AF99-319	(4) (4) (4) (4) (4)	AF94-315
Extended round head	AR22E0L, E5L	Extended with full guard (24mm dia.)	AR22G1L, G6L	Extended round head with square bezel	AR22E0P, E5P
(((((((((((((((((((AF94-317	ⓑ ♣(€@	AF02-70	⊕ ⊕ (€ ((((((((((((((((((((((((((((((((((AF94-314
Mushroom head (40mm dia.)	AR22MOL, M5L	Push-lock, turn-reset (40mm dia. with white arrow)	AR22V5L	Mushroom head with square bezel (29mm dia.)	AR22M4P
(E (C (C (C (C (C (C (C (C (C	AF94-367	(4) (5) (4)	AF97-72	((((((((((AF94-440
Mushroom head (29mm dia.)	AR22M4L, M9L	Flush square head	AR22F0M, F5M		
Extended with	AF94-369 AR22G4L, G9L	♠ ♠ (€ (©) Extended square head	AF97-68 AR22E0M, E5M		
transparent full guard (24mm dia.)	AF94-294	Extended square nead	AR22EUM, ESM		

■ Pushbutton switches

Operator	Type	Operator	Type	Operator	Type
Flush round head	AR22F0R, F5R	Flush round head Symbol mark type	AR22FAR, FBR	Mushroom head (40mm dia.)	AR22MOR, M5R
(4) (1) (1) (1) (1) (1) (1) (1)	AF94-320	((()	AF98-193	♠ ♠ (€@	AF94-293
Extended round head	AR22E0R, E5R	Extended round head Symbol mark type	AR22EAR, EBR	Mushroom head (29mm dia.)	AR22M4R, M9R
(h) (f)	AF94-319	@	AF98-192	♠ ♠ (€@	AF94-321

AR22 and DR22 Quick reference guide

■ Pushbutton switches

Operator	Туре	Operator	Туре	Operator	Туре
Extended with full guard (24mm dia.)	AR22G3R, G8R	Pushbutton with selector ring (2-position)	AR22S1R, S2R, S3R, S6R	Flush round head with square bezel	AR22F0Y, F5Y
(4) (1)	AF94-292	() (((((((((((((((((((AF97-507	(4) (6) (4) (6) (6) (6) (6) (7)	AF94-295
Flush with full guard (24mm dia.)	AR22G2R, G7R	Push-lock, turn-reset (40mm dia. with white arrow)	AR22V5R	Extended round head with square bezel	AR22E0Y, E5Y
(4) (1)	AF02-68	ⓑ ♣(€@	AF97-70	(€	AF94-297
Extended with half guard	AR22G0R, G5R	Flush square head	AR22F0S, F5S	Mushroom head with square bezel (29mm dia.)	AR22M4Y
	AF96-236	(€ (€ ((((((((((((((((AF94-316	(4) (4)	AF94-298
Mushroom head with full guard (40mm dia.)	AR22M3R, M8R	Extended square head	AR22E0S, E5S		
ⓑ ♣(€@	AF94-372	() ((((((((((((((((((AF94-296		

Note: AR22M8R: Not approved standard

■ Emergency stop pushbutton switches (conform to EN418)

Operator	Type	Operator	Туре	Operator	Туре
Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	AR22V0R	Push-lock, turn-reset (29mm dia.)	AR22V4R	Unibody push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	AR22VGE
() ((((((((((AF97-70	() (((((((((((((((((((AF95-53	c ¶ °us ≜(€@	KK03-037
Push-lock, turn-reset (40mm dia.)	AR22V2R	Key release push-lock, turn-reset (40mm dia.)	AR22V7R		
See page 04/23, 04/44					
() ((((((((((AF94-432	((((((((((AF98-37		
Push-lock, turn-reset (Soft-touch 29mm dia. with white arrow)	AR22VSR	Push-lock, pull-reset (35mm dia.)	AR22Q2R		
((((((((((AF99-317	④ 	AF95-52		

Notes: Provided with the \bigcirc (Direct opening action)



AR22 and DR22 Quick reference guide

■ Emergency stop illuminated pushbutton switches (conform to EN418)

Operator	Type	Operator	Type	Operator	Туре
Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	AR22V0L	Push-lock, turn-reset (Soft-touch 40mm dia. transparent in all colors with white arrow)	AR22VDL	Push-lock, turn-reset (Soft touch 29mm dia. with white arrow)	AR22VSL
(€ (€ ((((((((((((((((((((((((((((((((AF97-72	(h) (f)	AF97-77	(€ (€ (€ (€ (€ (€ (€ (€ (€ (€	AF99-316
Push-lock, turn-reset (40mm dia.)	AR22V2L	Push-lock, turn-reset (40mm dia. transparent in all colors)	AR22VAL	Unibody push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	AR22VGF
((((((((((AF94-307	♠ ♠ (€ ®	AF94-365	₽ L°us <u></u>	KK03-036

Note: Provided with the (Direct opening action)

■ Selector switches

Operator	Туре	Operator	Туре	Operator	Type
Knob	AR22PR, PCR	Key	AR22JR, JCR	Lever with square beze	AR22WY, WCY
		~6			
④ ⑤ ♠ (€((((((((((((((((((((((((((((((((((AF94-310	④ ④ △ (€ ((((((((((AF94-311	(€ ((((((((((AF94-323
Lever	AR22WR, WCR	Key (Long durability)	AR22JAR	Cylindrical knob with square bezel	AR22RY, RCY
				man equal o sezer	
⊕ ≜ (€ ((((((((((((((((((((((((((((((((((AF94-324	④ ⑤ <u>△</u> (€ (©	AF94-311	() (((((((((((((((((((AF94-362
Cylindrical knob	AR22RR, RCR	Knob with square bezel	AR22PY, PCY	Key with square bezel	AR22JY, JCY
(h) (f)	AF94-308	(€ (€ (((()	AF94-309	() () <u>(</u> () (((((((((((((((((((((((((((((((((AF94-322

■ Illuminated selector switches

Operator	Туре	Operator	Туре
Knob	AR22PL	Knob with square bezel	AR22PP
④ ● △(€@) AF94-306	ⓑ ⓑ △(€ @	AF94-318



AR22 and DR22 Quick reference guide

■ Pilot lights

Lens	Туре	Lens	Туре	Lens	Туре
Dome	DR22D0L	Flush square	DR22F3M	Extended square	DR22E3M
(€ (€ ((((((((((((((((((((((((((((((((AF94-333	() () ((((((((((((((((((AF94-330	ⓑ ∯ ♠(€@	AF94-380
Extended round	DR22E3L AF94-332	Flush square (Transparent lens)	DR22F4M AF94-443	Flush rectangular	DR22E3N AF96-237
Faceted	DR22K0L	Flush square (12mm high frame)	DR22F5M	Extended round with square bezel	DR22E3P
() (€ ((((((((((((((((((((((((((((((((AF96-189	(4) (1)	AF95-658	④ 	AF94-331

Note: With resistor unit type: Not approved standard

■ Joy stick selector switches

Handle	Type	Handle	Туре	Handle	Туре
Ball type	AR22A0, A5	Ball type with lock	AR22A1, A6	Rubber cap type	AR22A2, A7
		, CO,	0.00		
71° @	AF97-49	71 (€	AF97-45	71 ° ⊕ (€	AF97-56

■ Buzzers

Sound	Type	Sound	Type	Sound	Type
Electronic sound	DR22B5 *	Magnetic sound	DR22B3	Electronic sound (IP54)	DR22B8 *
(L) (S).	AF96-377		AF96-376	(b) (£ (€	AF96-24

Note: * 6V AC, 110V DC types: Not approved standard

■ Numerical indicators

■ Numerical indicators								
Display	Type	Display	Туре					
One-digit	DR22N1	Two-digit	DR22N2					
	KK02-548		KK02-16B					



AR22 and DR22 Part number system

Neon lamp (For AR22VGF)

P1: 240V AC, without transformer

Illuminated pushbuttons

AR22 E0L - 10 E3 R 3 4 5 6 1 (2)

Product category

AR22: 22mm-dia. illuminated pushbutton

22mm-dia. emergency stop illuminated pushbutton

② Operator

· Illuminated pushbutton

F0L: Flush round head

F5L: Flush round head (Alternate)

E0L: Extended round head

E5L: Extended round head (Alternate)

M0L: Mushroom head (40mm dia.)

M5L: Mushroom head (40mm dia. alternate)

M4L: Mushroom head (29mm dia.)

M9L: Mushroom head (29mm dia. alternate)

G4L: Extended with transparent full guard (24mm dia.)

G9L: Extended with transparent full guard (24mm dia. alternate)

G2L: Extended with full guard (24mm dia. with openings)

G7L: Extended with full guard (24mm dia. with openings, alternate)

G1L: Extended with full guard (24mm dia.)

G6L: Extended with full guard (24mm dia. alternate)

V5L: Push-lock, turn-reset (40mm dia. with white arrow) *1

F0M: Flush square head

F5M: Flush square head (Alternate)

E0M: Extended square head

E5M: Extended square head (Alternate)

F0P: Flush round head with square bezel

F5P: Flush round head with square bezel (Alternate)

E0P: Extended round head with square bezel

E5P: Extended round head with square bezel (Alternate)

M4P: Mushroom head with square bezel (29mm dia.)

· Emergency stop illuminated pushbutton

V0L: Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)

V2L: Push-lock, turn-reset (40mm dia.)

VDL: Push-lock, turn-reset (Soft-touch 40mm dia. transparent in all colors with white arrow)

VAL: Push-lock, turn-reset (40mm dia. transparent in all colors)

VSL: Push-lock, turn-reset (Soft-touch 29mm dia. with white arrow)

VGF: Unibody push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)

3 Contact arrangement

30: 3NO 10: 1NO 01: 1NC 03: 3NC 11: 1NO+1NC 40: 4NO 20: 2NO 04: 4NC 50: 5NO 02: 2NC 22: 2NO+2NC 05: 5NC

4 Lamp voltage

Incandescent lamp

54: 5.5V AC/DC, without transformer

H1: 110V AC, without transformer K1: 120V AC, without transformer M1: 220V AC, without transformer C4: 15V AC/DC, without transformer

D4: 20V AC/DC, without transformer

E4: 24V AC/DC. without transformer

H4: 100-110V AC, with transformer

L4: 115-127V AC, with transformer M4: 200-220V AC, with transformer

Q4: 230-254V AC, with transformer S4: 350-380V AC, with transformer T4: 400-440V AC, with transformer

V4: 480V AC, with transformer

W4: 500-550V AC, with transformer

·LED lamp

A3: 6V AC, without transformer

63: 6V DC, without transformer

B3: 12V AC/DC, without transformer

C3: 15V AC/DC, without transformer

E3: 24V AC/DC, without transformer

H3: 100-110V AC, with transformer

L3: 115-127V AC, with transformer M3: 200-220V AC, with transformer

Q3: 230-254V AC, with transformer S3: 350-380V AC, with transformer T3: 400-440V AC, with transformer

V3: 480V AC, with transformer

W3: 500-550V AC, with transformer

⑤ Color of lens

G: Green Y: Yellow R: Red *2 A: Orange W: White S: Blue

6 Special product

Z9: Resisting water-soluble cutting oils and heat

Z8: With a contact protection cover

Z4: Resisting sulfuration gas

ZB: Meeting IP2X finger-protection standards

Notes: *1 Products with no trigger action mechanism. These products cannot be used as emergency stop switches that comply with EN standards.

*2 Button color of emergency stop illuminated switches are Red only.

· The manufacturing range varies depending on the model. For details, refer to the contents of this catalog



AR22 and DR22 Part number system

Pushbuttons

<u>AR22</u> <u>EOR</u> − <u>10</u> <u>R</u> □ □ ② ③ ④ ⑤ ⑥

Product category

AR22: 22mm-dia. pushbutton

22mm-dia. emergency stop pushbutton

② Operator

•Pushbutton switch

F0R: Flush round head

F5R: Flush round head (Alternate)

E0R: Extended round head

E5R: Extended round head (Alternate)

FAR: Flush round head (Symbol mark type)

FBR: Flush round head (Symbol mark type, alternate)

EAR: Extended round head (Symbol mark type)

EBR: Extended round head (Symbol mark type, alternate)

M0R: Mushroom head (40mm dia.)

M5R: Mushroom head (40mm dia. Alternate)

M4R: Mushroom head (29mm dia.)

M9R: Mushroom head (29mm dia. Alternate)

G3R: Extended with full guard (24mm dia.)

G8R: Extended with full guard (24mm dia. Alternate)

G2R: Flush with full guard (24mm dia.)

G7R: Flush with full guard (24mm dia. Alternate)

G0R: Extended with half guard

G5R: Extended with half guard (Alternate)

M3R:Mushroom head with full guard (40mm dia.)

M8R: Mushroom head with full guard (40mm dia. Alternate)

S1R: Push-button with selector ring (2-position)

S2R: Push-button with selector ring (2-position)

S3R: Push-button with selector ring (2-position)

S6R: Push-button with selector ring (2-position)

V5R: Push-lock, turn-reset (40mm dia. with white arrow) *1

F0S: Flush square head

F5S: Flush square head (Alternate)

E0S: Extended square head

E5S: Extended square head (Alternate)

F0Y: Flush round head with square bezel

F5Y: Flush round head with square bezel (Alternate)

E0Y: Extended round head with square bezel

E5Y: Extended round head with square bezel (Alternate)

M4Y: Mushroom head with square bezel (29mm dia.)

•Emergency stop pushbutton switch

V0R: Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)

V2R: Push-lock, turn-reset (40mm dia.)

VSR: Push-lock, turn-reset (Soft-touch 29mm dia. with white arrow)

V4R: Push-lock, turn-reset (29mm dia.)

V7R: Key-release push-lock, turn-reset (40mm dia.)

Q2R: Push-lock, pull-reset (35mm dia.)

VGE:Unibody push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)

③ Contact arrangement

10: 1NO 30: 3NO 01: 1NC 03: 3NC 11: 1NO+1NC 33: 3NO+3NC 20: 2NO 40: 4NO 02: 2NC 04: 4NC 22: 2NO+2NC 50: 5NO 05: 5NC

4 Color of button

 G:
 Green
 Y:
 Yellow

 R:
 Red'²
 A:
 Orange

 B:
 Black
 S:
 Blue

 W:
 White
 C:
 Clear

Green, Red, Black (For AR22F0R) (For AR22FAR, FBR, EAR, EBR)

Symbol mark (For AR22FAR, FBR, EAR, EBR)

Symbol mark	0		I		T		\circ		T
Color of button	White	Black	White	Black	White	Black	Clear		
Color of mark	Red		Green		Green		Black		
Code	01	02	03	04	11	12	02B	04B	12B

6 Special product

Z9: Resisting water-soluble cutting oils and heat

Z8: With a contact protection cover

onenies.com

Z4: Resisting sulfuration gas

ZB: Meeting IP2X finger-protection standards

Notes: *1 Products with no trigger action mechanism. These products cannot be used as emergency stop switches that comply with EN standards.

*2Button color of emergency stop switches are Red only.

 The manufacturing range varies depending on the model. For details, refer to the contents of this catalog.



AR22 and DR22 Part number system

Selector and illuminated selector switches

AR22 PL - 2 □ 10 E3 G □ □ 1 2 3 4 5 6 7 8 9

① Product category

AR22: 22mm dia. selector switch and illuminated selector switch

2 Operator

·Selector switch PR: Knob

PCR: Knob operated control type

WR: Lever

WCR: Lever operated control type

RR: Cylindrical knob

RCR: Cylindrical knob operated control type

JR: Key

JCR: Key operated control type JAR: Key (Long durability) PY: Knob with square bezel

PCY: Knob operated control type with square bezel

WY: Lever with square bezel

WCY: Lever operated control type with square bezel

Cylindrical knob with square bezel

RCY: Cylindrical knob operated control type with square bezel

JY:Key with square bezel

JCY: Key operated control type with square bezel

·Illuminated selector switch

Knob

Knob with square bezel PP:

③ Operation

- 2-position, maintained
- 2-position, spring return
- 3-position, maintained
- 3-position, spring/manual return (Left to center)
- 3-position, spring/manual return (Right to center)
- 3-position, spring return 1.
- 4-position, maintained (For AR22PCR, WCR, RCR)
- 5-position, maintained (For AR22PCR, WCR, RCR)

4 Key removable position

- Left
- Left and right
- Left, right and center C.
- D: Right
- F٠ Center
- Right and center F:
- Left and center

5 Contact arrangement

30: 3NO 10: 1NO 01: 1NC 03: 3NC 33: 3NO+3NC 11: 1NO+1NC 20: 2NO 40: 4NO 02: 2NC 04: 4NC 22: 2NO+2NC 50: 5NO 05: 5NC

6 Lamp voltage

Incandescent lamp

54: 5.5V AC/DC, without transformer C4: 15V AC/DC, without transformer D4: 20V AC/DC, without transformer E4: 24V AC/DC, without transformer H4: 100-110V AC, with transformer L4: 115-127V AC, with transformer M4: 200-220V AC, with transformer Q4: 230-254V AC, with transformer S4: 350-380V AC, with transformer T4: 400-440V AC, with transformer V4: 480V AC, with transformer W4: 500-550V AC, with transformer

·LED lamp A3: 6V AC, without transformer

63: 6V DC, without transformer

B3: 12V AC/DC, without transformer C3: 15V AC/DC, without transformer E3: 24V AC/DC, without transformer

H3: 100-110V AC, with transformer

L3: 115-127V AC, with transformer M3: 200-220V AC, with transformer Q3: 230-254V AC, with transformer

S3: 350-380V AC, with transformer T3: 400-440V AC, with transformer

V3: 480V AC, with transformer

W3: 500-550V AC, with transformer

Color of knob

B: Black (Not available for illuminated selector switch)

G: Green

R: Red

w. White (Not available for selector switch)

Yellow (Not available for selector switch)

Orange (Not available for selector switch) A:

Blue (Not available for selector switch)

8 Key type No.

A, B, C, D, E or F ("A" is standard)

9 Special product

Z9: Resisting water-soluble cutting oils and heat

Z8: With a contact protection cover

Z4: Resisting sulfuration gas

ZB: Meeting IP2X finger-protection standards

Note: • The manufacturing range varies depending on the model. For details, refer to the contents of this catalog.



AR22 and DR22 Part number system

Pilot lights

DR22 DOL - E3 W ☐ ① ② ③ ④ ⑤

Product category

DR22: 22mm dia. pilot light

2 Lens

D0L: Dome

E3L: Extended round

K0L: Faceted

F3M: Flush square

F4M: Flush square (Transparent lens) F5M: Flush square (12mm high frame)

E3M: Extended square E3N: Flush rectangular

E3P: Extended round with square bezel

3 Lamp voltage

Incandescent lamp

54: 5.5V AC/DC, without transformer C4: 15V AC/DC, without transformer D4: 20V AC/DC, without transformer E4: 24V AC/DC, without transformer H4: 100-110V AC, with transformer L4: 115-127V AC, with transformer M4: 200-220V AC, with transformer Q4: 230-254V AC, with transformer S4: 350-380V AC, with transformer T4: 400-440V AC, with transformer V4: 480V AC, with transformer W4: 500-550V AC, with transformer

•LED lamp

A3: 6V AC, without transformer
63: 6V DC, without transformer
B3: 12V AC/DC, without transformer
C3: 15V AC/DC, without transformer
E3: 24V AC/DC, without transformer
H3: 100-110V AC, with transformer

L3: 115-127V AC, with transformer M3: 200-220V AC, with transformer Q3: 230-254V AC, with transformer

S3: 350-380V AC, with transformer
T3: 400-440V AC, with transformer
V3: 480V AC, with transformer
W3: 500-550V AC, with transformer

H7: 110V DC, with resistor unit

4 Color of lens

G: Green Y: Yellow
R: Red A: Orange
W: White S: Blue

⑤ Special product

Z9: Resisting water-soluble cutting oils and heat

Z4: Resisting sulfuration gas

ZB: Meeting IP2X finger-protection standards

Note: • The manufacturing range varies depending on the model. For details, refer to the contents of this catalog.

58: 5.5V AC/DC, short-body without transformer C8: 15V AC/DC, short-body without transformer D8: 20V AC/DC, short-body without transformer E8: 24V AC/DC, short-body without transformer H8: 100-110V AC, short-body with transformer L8: 115-127V AC, short-body with transformer M8: 200-220V AC, short-body with transformer

A9: 6V AC, short-body without transformer 69: 6V DC, short-body without transformer B9: 12V AC/DC, short-body without transformer C9: 15V AC/DC, short-body without transformer E9: 24V AC/DC, short-body without transformer H9: 100-110V AC, short-body with transformer M9: 200-220V AC, short-body with transformer M9: 200-220V AC, short-body with transformer



Pushbuttons/Selectors/Pilot Lights/Buzzers AR22 and DR22 Part number system

Joy stick selector switches

AR22A 0 N - A0A0 B

1 23 4 5

Product category

AR22A: 22mm-dia. Joy stick selector switch

2 Handle

0: Ball type (without lock, manual return)

1: Ball type with lock (manual return)

2: Rubber cap type (without lock, manual return)

5: Ball type (without lock, spring return)

6: Ball type with lock (spring return)

7: Rubber cap type (without lock, spring return)

3 Terminal

N: Screw

H: Solder/tab

④ Contact arrangement

Contac	ct arrangement	Blank	1NO	1NC	1NO+1NC	2NO	2NC	2NO+2NC
Code	Screw	0	Α	В	1	D	E	-
	Solder/tab	0	-	-	1	-	-	2

Operating direction code of contacts



1: Upper 2: Right 3: Lower 4: Left Ex. AR22A0N-<u>A 0 A 0</u> B 1 2 3 4

⑤ Handle color

B: Black

■ Ordering information

Specify the following:

1. Type number

For the CCC approved product, add the suffix (CCC) to the type number

Example: Pushbutton switch AR22F0R-11B(CCC)

Buzzers

DR22B 5 - E B

1 2 34

Product category

DR22B: 22mm-dia. buzzer

② Sound

5: Electronic sound

3: Magnetic sound

8: Electronic sound (IP54)

3 Operating voltage

A: 6V AC (Type "5", "8")

6: 6V DC (Type "5", "8")

E: 12-24V AC/DC (Type "3": 24V AC/DC)

F: 35-48V AC/DC (Type "5", "8")

H: 100-110V AC

M: 200-220V AC

1: 100-110V DC (Type "5", "8")

4 Color of head

B: Black



AR22 and DR22 **Ratings and specifications**

■ Standards approved

UL508	File No. E44592					
CSA C22.2 No.14	File No. LR20479					
	cUL File No. E44592 (For AR22VG)					
TÜV: EN60947-5-1	Pushbutton, Illuminated pushbutton: R9551062,					
	Selector, Illuminated selector: R9551060					
	Pilot lights: R9551061					
	Joy stick selector switch: R2050803					
	(Lever switch)					
	Buzzer: J9950091					
TÜV: EN60947-5-1	Emergency stop pushbutton					
EN60947-5-5	Emergency stop illuminated pushbutton					
	: R50028146, R50028137 (For AR22VG)					

■ Specifications (Indoor use)

Description	Pushbutton switch Illuminated pushbutton switch Emergency stop pushbutton switch Emergency stop illuminated pushbutton switch Selector switch Illuminated selector switch	Joy stick selector (Lever switch)	Pilot light			
Rated insulation voltage	600V AC/DC *1	250V AC/DC	250V AC/DC *2			
Mechanical durability	See page 13	250,000 operations	_			
Electrical durability	500,000 operations at 220V AC 6A	100,000 operations	_			
	1 million operations at 220V AC 3A	at 220V AC 1A				
	(AR22VG type: 100,000 operations)	(Res. load)				
Operating frequency	1200 operations/hour (On-load factor: 40	_				
	AR22VG type: 1800 operations/hour (On	-load factor: 40%)				
Dielectric strength	2500V AC, 1 minute *3	2000V AC, 1 minute *4				
Insulation resistance	100MΩ or more (500V DC megger)					
Rated impulse dielectric strength	6kV (AR22VG type: 4kV)	_	6kV			
Conditional short-circuit current	1000A	1000A	_			
Short-circuit protective device	Fuse 15A	Fuse 1A	_			
Pollution degree	3					
Vibration	Resonance: 10 to 55Hz, double amplitud	esonance: 10 to 55Hz, double amplitude 0.1mm *5				
	Constant: 16.7Hz, double amplitude 3mn	n				
Shock	Malfunction durability: 100m/s ² * ⁶		Mechanical durability: 500m/s²			
	Mechanical durability: 500m/s ²					
Ambient temperature	-20 to +70°C *7	-5 to +70°C	-20 to +50°C			
(No condensation or no icing)						
Storage temperature	-40 to +80°C					
Humidity	45 to 85% RH (within -5 to +40°C)					
Degree of protection	IP65	·	·			

Notes: *1 Illuminated type without transformer and AR22VG type: 250V AC/DC *2 Pilot light with transformer: 600V AC

^{*3} Illuminated type without transformer: 2000V AC, 1 minute (except AR22VGF type)

^{*4} Pilot light with transformer: 2500V AC, 1 minute
*5 Emergency stop type: 10 to 500Hz, double amplitude 0.7mm (acceleration 50m/s²), according to the test condition of EN60947-5-5 (1998)

^{*6} Emergency stop type: 150m/s²
*7 AR22VGE type: -20 to +60°C, illuminated type: -20 to +50°C



Pushbuttons/Selectors/Pilot Lights/Buzzers AR22 and DR22

Ratings and specifications

• Mechanical durability

Description	_		Operations
Pushbutton switch Illuminated pushbutton switch Emergency stop pushbutton switch Emergency stop illuminated pushbutton	Momentary action Alternate action With selector ring Push-lock, turn-reset Push-lock, pull-reset		5 million 1 million 100,000 100,000 30,000
Selector switch	Maintained 1, 2, 3, 4-c Maintained 5, 6-contac Control type, spring ref	1 million 500,000 200,000	
Illuminated selector switch	Maintained Without transformer With transformer	1, 2, 3-contact 4-contact 1, 2-contact 3-contact	1 million 500,000 1 million 500,000
Note: Key insertion/removal durability for sele • Key type 10,000 • Key (Long durability) type 20,000	Spring return, spring/m	anual return	200,000
Buzzers	DDoor	D DOOS	

Buzzers

• buzzers								
Item	DR22B5	DR22B3	DR22B8					
Rated insulation voltage	Without transformer: 60\	Without transformer: 60V AC/DC With transformer: 250V AC						
Sound level	90dB (0.1m) 70dB (1m)	80 to 90dB (0.1m) 60 to 70dB (1m)	80dB (0.1m) 60dB (1.0m)					
Durability	1000h	200h	1000h					
Frequency	2.4 to 3.3kHz							
Intermittent cycle	Approx. 170-cycle/min							
Current consumption	See the table below							
Dielectric strength	Without transformer: 100	00V AC 1 minute With trans	sformer: 2000V AC 1 minute					
Insulation resistance	100MΩ or more (500V DC	megger)						
Pollution degree	3		_					
Vibration	Resonance: 10 to 55Hz, d Constant: 16.7Hz, double	•						
Shock	Mechanical durability: 500	m/s²						
Ambient temperature		-20 to +60°C (No condensation or no icing) (with resistor unit: -20 to +40°C)						
Storage temperature	−30 to +70°C							
Humidity	45 to 85%RH (within –5 to	40°C)						
Degree of protection	IP00 IP54							

·Current consumption

Operational voltage	Current consumption	
	DR22B5, DR22B8	DR22B3
6V AC	70mA AC	
6V DC	35mA DC	=
24V AC/DC	40mA AC, 25mA DC	30mA AC, 20mA DC
48V AC/DC	65mA AC, 20mA DC	=
110V AC	30mA AC	30mA AC
110V DC	30mA DC	=
220V AC	15mA AC	15mA AC

Key type 10,000Key (Long durability) type 20,000



AR22 and DR22 Ratings and specifications

■ Contact ratings • UL/CSA standards

AC (COS Ø=0.35)

Contact rated code	120V	120V		240V		480V		600V	
	Making current	Breaking current							
A600	60A	6.0A	30A	3.0A	15A	1.5A	12A	1.2A	
B300 (AR22VG)	30A	3.0A	15A	1.5A	_	_	_	_	

DC T_{0.95}= 6P (Max. 300ms)

Description	Contact rated code	Making current · Breaking current			
		125V	250V	301V-600V	
Illuminated pushbutton switch Pushbutton (Ring type selector switch: AR22S2R only) Emergency stop pushbutton switch	P600	1.1A	0.55A	0.2A	
Emergency stop illuminated pushbutton switch (Except the overlap contact types)	Q300 (AR22VG)	0.55A	0.27A	_	
Overlap contact types of products shown above Pushbutton (Ring type selector switch: AR22S1R, S6R only) Selector switch (2-position only, except the overlap contact types) Illuminated selector switch (2-position only, except the overlap contact types)	Q600	0.55A	0.27A	0.1A	
Pushbutton (Ring type selector switch: AR22S3R only) Selector switch (2-pos./overlap contact type, 3-, 4-, 5-pos. type) Illuminated selector switch (2-pos./overlap contact type, 3-pos. type)	R300	0.22A	0.11A	_	

Note: Joy stick selector switches (Lever switches): 250V AC, 5A (Res. load) 125V DC, 0.2A 24V DC, 1A (Res. load)

● EN standard/TÜV approved

Description	Rated operational current					
	Rated thermal	Rated operational	AC15 (Ind. load)	DC13 (Ind. load)		
	current	voltage	Rated operational current	Rated operational current		
Illuminated pushbutton switch	10A	24V	6.0A	4.0A (AR22VG: 1.5A)		
Pushbutton (Except the selector ring type)		120V	6.0A (AR22VG: 3A)	_		
Emergency stop pushbutton switch		125V	_	1.3A (AR22VG: 0.3A)		
Emergency stop illuminated pushbutton switch		240V	6.0A (AR22VG: 3A)	_		
Selector switch (2-position)		250V	_	0.45A(AR22VG: 0.15A)		
Illuminated selector switch (2-position)		480V	2.5A (AR22VG: -)	_		
		600V	2.0A (AR22VG: -)	_		
Selector switch (3, 4, 5-position)	10A	24V	6.0A	2.0A		
Illuminated selector switch (3-position)		120V	6.0A	_		
Pushbutton with selector ring		125V	_	0.65A		
		240V	6.0A	_		
		250V	-	0.23A		
		480V	2.5A	_		
		600V	2.0A	_		
Joy stick selector switch (Lever switch)	5A	24V	_	0.7A		
		120V	0.3A	-		
		125V	_	0.15A		
		240V	0.3A	_		

Lamp rated voltage UL/CSA standards, TÜV approved

	LED lamp	Incandescent lamp	Neon lamp
Full-voltage (without transformer)	Max. 24V AC/DC	Max. 30V AC/DC	Max. 240V AC
With transformer	Max. 550V AC (Short-body type: Max. 220V AC	_	



Pushbuttons/Selectors/Pilot Lights/Buzzers AR22 and DR22

Ratings and specifications

■ Operating characteristic (1NO+1NC)

Description	Pushbutton	Emergency stop pushbutto	n	Selector *2			
	Illuminated pushbutton		ed pushbutton Illuminated selector		ector		
		Push-lock type	Push-pull type	Maintained	Spring/manual return	Spring return	
Ave. required operating force	9N (Push-lock type: 20N)	30N (AR22VG: 22N)*1	45N	0.15N•m	0.13N•m	0.1N•m	
Operating travel	Approx. 6mm	Approx. 9mm	Approx. 9mm	2-position: Approx. 90°	3-position: Approx. 45°	2-position: Approx. 60°	
	(Push-lock type: Approx. 9mm, operation	(AR22VG: Approx. 10mm, operation		3-position: Approx. 45°		3-position: Approx. 45°	
	angle: Approx. 45°)	angle: Approx. 45°)		4-position: Approx. 40°			
				5-position: Approx. 30°			
Required return	_	0.6N•m	30N (pull)	0.15N•m	0.13N·m	_	
force	(Push-lock type: 0.6N•m)	(AR22VG: 0.2N·m)					

Notes: *1 AR22V2R, V4R, V7R, VAL types: 45N *2 4-position, 5-position: 2NO+2NC

■ Lamp ratings

·Illuminated pushbuttons, illuminated selectors, pilot lights

Transformer	Lamp voltage	LED	LED			Incandescent			
		Туре	Rated voltage	Consumption	Туре	Rated voltage	Consumption		
Without	5.5V AC/DC	_	_	-	AHX135	6.3V AC/DC	0.9W		
transformer	6V AC	APX510-6□	6V AC	Green, red, orange, amber: 7mA AC	-	-	_		
				Yellow: 26mA AC Blue: 16mA AC					
	6V DC	APX510-D6□	6V DC	Green, red, orange, amber: 11mA DC	-	_	_		
				Yellow: 33mA DC Blue: 22mA DC					
	12V AC/DC	APX510-12□	12V AC/DC	14mA AC, 11mA DC	_	_	_		
	15V AC/DC	APX510-15□	15V AC/DC	13mA AC, 11mA DC	AHX279	18V AC/DC	0.8W		
	20V AC/DC	-	2	_	AHX144	24V AC/DC	0.9W		
	24V AC/DC	APX510-24□	24V AC/DC	12mA AC, 11mA DC	AHX129	30V AC/DC	0.8W		
With transformer	110V AC	APX510-6□	6V AC	1.5VA	AHX135	6.3V AC/DC	2VA		
(Standard type:	127V AC						2VA		
AR9T511)	220V AC						2VA		
	254V AC	APX510-6□	6V AC	2.5VA	AHX135	6.3V AC/DC	2.5VA		
	380V AC						2.5VA		
	440V AC						2.5VA		
	480V AC						2.5VA		
	550V AC						2.5VA		
With resistor unit	110V DC	APX510-24□	24V AC/DC	1.2W	-	-	-		
(AR9T519-H)									

Notes: • Short body pilot lights: 110V AC, 127V AC, 220V AC only

• Replace the \square mark by the lamp luminous color code, see page 16

• Except AR22VGF type

·Emergency stop illuminated pushbuttons (AR22VGF type)

Transformer	Lamp	Voltage	Туре	Rated voltage	Consumption
Without transformer	LED	24V AC/DC	AR9L002-ER	24V AC/DC	12mA AC
					11mA DC
	Neon	110V AC	AR9N001-HA	110V AC	0.19VA
		120V AC	AR9N001-KA	120V AC	0.21VA
		220V AC	AR9N001-MA	220V AC	0.30VA
		240V AC	AR9N001-PA	240V AC	0.30VA

Notes: Lamp base: BA9S/13




AR22 and DR22 Ratings and specifications

■ Lamp durability

Lamp	Durability	Judgement criterion
LED	Approx. 30000h	When brightness is less than 50% of initial value
Incandescent	Approx. 5000h (AC)	When the bulb burns out
Neon	Approx. 5000h	When a remarkable blackening appears in the glass bulb and the using becomes improper

Note: The operating voltage for incandescent lamps is set at 80 to 90% of the lamp's rated voltage.

Estimated durability for LED lamps



Notes: • Durability at Ta=25°C

 Durability is affected by temperature, humidity, and voltage fluctuation.


■ Combination of lens color and LED or neon lamp luminous color

Lens		LED or neon lamp	
Color	Code	Luminous color	Type
Green	G	Green	APX510- ■ G
Red	R	Red	APX510- ■ R
White	W	Orange	APX510- ■ O
Yellow	Υ	Yellow	APX510- ■ Y
Orange *	Α	Amber	APX510- ■ A
Blue	S	Blue	APX510- ■ S
Red (AR22VGF)	R	Red	AR9L002-ER
		Orange (Neon lamp)	AR9N001- ■ A

Notes: * DR22F4M: LED lamp color is orange. (APX510-■O)

• Replace the ■ mark by the lamp voltage code

Incandescent lamp voltage characteristics





■ Illuminated pushbutton switches


Operator	Trans- former	Contact	LED lamp Momentary action Type	Alternate action Type	Incandescent lamp Momentary action Type	Alternate action Type
Flush round head	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22F0L-10m3	AR22F5L-10■3 ☐ AR22F5L-01■3 ☐ AR22F5L-11■3 ☐	AR22F0L-10■4 AR22F0L-01■4 AR22F0L-11■4 AR22F0L-22■4	AR22F5L-10■4□ AR22F5L-01■4□ AR22F5L-11■4□
AF94-318	With	1NO 1NC 1NO+1NC	AR22F0L-10■3 ☐ AR22F0L-01■3 ☐ AR22F0L-11■3 ☐	AR22F5L-10■3□ AR22F5L-01■3□ AR22F5L-11■3□	AR22F0L-10■4□ AR22F0L-01■4□ AR22F0L-11■4□	AR22F5L-10■4□ AR22F5L-01■4□ AR22F5L-11■4□
Extended round head	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22E0L-10■3 ☐ AR22E0L-01■3 ☐ AR22E0L-11■3 ☐ AR22E0L-22■3 ☐	AR22E5L-10■3□ AR22E5L-01■3□ AR22E5L-11■3□	AR22E0L-10■4 AR22E0L-01■4 AR22E0L-11■4 AR22E0L-22■4	AR22E5L-10■4□ AR22E5L-01■4□ AR22E5L-11■4□
AF94-317	With	1NO 1NC 1NO+1NC	AR22E0L-10■3 ☐ AR22E0L-01■3 ☐ AR22E0L-11■3 ☐	AR22E5L-10■3 ☐ AR22E5L-01■3 ☐ AR22E5L-11■3 ☐	AR22E0L-10■4□ AR22E0L-01■4□ AR22E0L-11■4□	AR22E5L-10■4 ☐ AR22E5L-01■4 ☐ AR22E5L-11■4 ☐
Mushroom head (40mm dia.)	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22M0L-10■3 □ AR22M0L-01■3 □ AR22M0L-11■3 □ AR22M0L-22■3 □	AR22M5L-10■3 □ AR22M5L-01■3 □ AR22M5L-11■3 □	AR22M0L-10■4 ☐ AR22M0L-01■4 ☐ AR22M0L-11■4 ☐ AR22M0L-22■4 ☐	AR22M5L-10■4 □ AR22M5L-01■4 □ AR22M5L-11■4 □ -
AF94-367	With	1NO 1NC 1NO+1NC	AR22M0L-10■3 □ AR22M0L-01■3 □ AR22M0L-11■3 □	AR22M5L-10■3 ☐ AR22M5L-01■3 ☐ AR22M5L-11■3 ☐	AR22M0L-10■4□ AR22M0L-01■4□ AR22M0L-11■4□	AR22M5L-10■4□ AR22M5L-01■4□ AR22M5L-11■4□
Mushroom head (29mm dia.)	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22M4L-10■3 AR22M4L-01■3 AR22M4L-11■3 AR22M4L-11■3 AR22M4L-22■3	AR22M9L-10■3 □ AR22M9L-01■3 □ AR22M9L-11■3 □ -	AR22M4L-10■4 ☐ AR22M4L-01■4 ☐ AR22M4L-11■4 ☐ AR22M4L-22■4 ☐	AR22M9L-10■4 □ AR22M9L-01■4 □ AR22M9L-11■4 □
AF94-369	With	1NO 1NC 1NO+1NC	AR22M4L-10■3 ☐ AR22M4L-01■3 ☐ AR22M4L-11■3 ☐	AR22M9L-10■3 ☐ AR22M9L-01■3 ☐ AR22M9L-11■3 ☐	AR22M4L-10■4□ AR22M4L-01■4□ AR22M4L-11■4□	AR22M9L-10■4 □ AR22M9L-01■4 □ AR22M9L-11■4 □
Extended with transparent full guard (24mm dia.)	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22G4L-10■3 ☐ AR22G4L-01■3 ☐ AR22G4L-11■3 ☐ AR22G4L-12■3 ☐	AR22G9L-10■3 □ AR22G9L-01■3 □ AR22G9L-11■3 □ -	AR22G4L-10■4	AR22G9L-10■4□ AR22G9L-01■4□ AR22G9L-11■4□ -
AF94-294	With	1NO 1NC 1NO+1NC	AR22G4L-10■3 □ AR22G4L-01■3 □ AR22G4L-11■3 □	AR22G9L-10■3□ AR22G9L-01■3□ AR22G9L-11■3□	AR22G4L-10■4□ AR22G4L-01■4□ AR22G4L-11■4□	AR22G9L-10■4□ AR22G9L-01■4□ AR22G9L-11■4□
Extended with full guard (24mm dia. with openings)	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22G2L-10■3 □ AR22G2L-01■3 □ AR22G2L-11■3 □ AR22G2L-12■3 □	AR22G7L-10■3 ☐ AR22G7L-01■3 ☐ AR22G7L-11■3 ☐ —	AR22G2L-10■4 □ AR22G2L-01■4 □ AR22G2L-11■4 □ AR22G2L-11■4 □	AR22G7L-10■4 □ AR22G7L-01■4 □ AR22G7L-11■4 □
AF99-319	With	1NO 1NC 1NO+1NC	AR22G2L-10■3 □ AR22G2L-01■3 □ AR22G2L-11■3 □	AR22G7L-10■3 ☐ AR22G7L-01■3 ☐ AR22G7L-11■3 ☐	AR22G2L-10■4 □ AR22G2L-01■4 □ AR22G2L-11■4 □	AR22G7L-10■4 ☐ AR22G7L-01■4 ☐ AR22G7L-11■4 ☐

Note: ■ □ See page 19

Illuminated Pushbuttons **AR22**

Operator	Trans- former	Contact	LED lamp Momentary action Type	Alternate action Type	Incandescent lamp Momentary action Type	Alternate action Type
Extended with full guard (24mm dia.)	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22G1L-10■3□ AR22G1L-01■3□ AR22G1L-11■3□ AR22G1L-22■3□	AR22G6L-10■3□ AR22G6L-01■3□ AR22G6L-11■3□ -	AR22G1L-10■4□ AR22G1L-01■4□ AR22G1L-11■4□ AR22G1L-22■4□	AR22G6L-10■4□ AR22G6L-01■4□ AR22G6L-11■4□
КК02-127А	With	1NO 1NC 1NO+1NC	AR22G1L-10■3□ AR22G1L-01■3□ AR22G1L-11■3□	AR22G6L-10■3□ AR22G6L-01■3□ AR22G6L-11■3□	AR22G1L-10■4□ AR22G1L-01■4□ AR22G1L-11■4□	AR22G6L-10■4□ AR22G6L-01■4□ AR22G6L-11■4□
Push-lock, turn-reset (40mm dia. with white arrow)	Without	1NO 1NC 1NO+1NC 3NC	_ _ _	AR22V5L-10■3 AR22V5L-01■3 AR22V5L-11■3 AR22V5L-03■3	-010	AR22V5L-10■4 ☐ AR22V5L-01■4 ☐ AR22V5L-11■4 ☐ AR22V5L-03■4 ☐
AF97-72	With	1NO 1NC 1NO+1NC	_ _ _	AR22V5L-10■3 ☐ AR22V5L-01■3 ☐ AR22V5L-11■3 ☐	<u> </u>	AR22V5L-10■4□ AR22V5L-01■4□ AR22V5L-11■4□
Flush square head	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22F0M-10■3 AR22F0M-01■3 AR22F0M-11■3 AR22F0M-22■3	AR22F5M-10■3□ AR22F5M-01■3□ AR22F5M-11■3□	AR22F0M-10■4□ AR22F0M-01■4□ AR22F0M-11■4□ AR22F0M-22■4□	AR22F5M-10■4 ☐ AR22F5M-01■4 ☐ AR22F5M-11■4 ☐
AF97-68	With	1NO 1NC 1NO+1NC	AR22F0M-10■3□ AR22F0M-01■3□ AR22F0M-11■3□	AR22F5M-10■3□ AR22F5M-01■3□ AR22F5M-11■3□	AR22F0M-10■4□ AR22F0M-01■4□ AR22F0M-11■4□	AR22F5M-10■4□ AR22F5M-01■4□ AR22F5M-11■4□
Extended square head	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22E0M-10■3□ AR22E0M-01■3□ AR22E0M-11■3□ AR22E0M-22■3□	AR22E5M-10■3□ AR22E5M-01■3□ AR22E5M-11■3□ -	AR22E0M-10■4□ AR22E0M-01■4□ AR22E0M-11■4□ AR22E0M-22■4□	AR22E5M-10■4□ AR22E5M-01■4□ AR22E5M-11■4□
AF94-357	With	1NO 1NC 1NO+1NC	AR22E0M-10■3□ AR22E0M-01■3□ AR22E0M-11■3□	AR22E5M-10■3□ AR22E5M-01■3□ AR22E5M-11■3□	AR22E0M-10■4□ AR22E0M-01■4□ AR22E0M-11■4□	AR22E5M-10■4□ AR22E5M-01■4□ AR22E5M-11■4□
Flush round head with square bezel	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22F0P-10 3 AR22F0P-01 3 AR22F0P-11 3 AR22F0P-11 3 AR22F0P-22 3	AR22F5P-10■3□ AR22F5P-01■3□ AR22F5P-11■3□ -	AR22F0P-10■4 AR22F0P-01■4 AR22F0P-11■4 AR22F0P-11■4	AR22F5P-10■4□ AR22F5P-01■4□ AR22F5P-11■4□
AF94-315	With	1NO 1NC 1NO+1NC	AR22F0P-10■3 ☐ AR22F0P-01■3 ☐ AR22F0P-11■3 ☐	AR22F5P-10■3 ☐ AR22F5P-01■3 ☐ AR22F5P-11■3 ☐	AR22F0P-10■4□ AR22F0P-01■4□ AR22F0P-11■4□	AR22F5P-10■4□ AR22F5P-01■4□ AR22F5P-11■4□
Extended round head with square bezel	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22E0P-10■3□ AR22E0P-01■3□ AR22E0P-11■3□ AR22E0P-22■3□	AR22E5P-10■3□ AR22E5P-01■3□ AR22E5P-11■3□ -	AR22E0P-10■4 AR22E0P-01■4 AR22E0P-11■4 AR22E0P-11■4	AR22E5P-10■4 ☐ AR22E5P-01■4 ☐ AR22E5P-11■4 ☐
AF94-314 Note: ■ □ See page 19	With	1NO 1NC 1NO+1NC	AR22E0P-10■3□ AR22E0P-01■3□ AR22E0P-11■3□	AR22E5P-10■3□ AR22E5P-01■3□ AR22E5P-11■3□	AR22E0P-10■4□ AR22E0P-01■4□ AR22E0P-11■4□	AR22E5P-10■4□ AR22E5P-01■4□ AR22E5P-11■4□

Note: ■ □ See page 19





Operator	Trans- former	Contact	LED lamp Momentary action Type	Alternate action Type	Incandescent lamp Momentary action Type	Alternate action Type
Mushroom head with square bezel (29mm dia.)	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR22M4P-10■3 AR22M4P-01■3 AR22M4P-11■3 AR22M4P-22■3	- - -	AR22M4P-10■4□ AR22M4P-01■4□ AR22M4P-11■4□ AR22M4P-22■4□	- - -
AF94-440	With	1NO 1NC 1NO+1NC	AR22M4P-10■3□ AR22M4P-01■3□ AR22M4P-11■3□	- - -	AR22M4P-10 = 4 AR22M4P-01 = 4 AR22M4P-11 = 4	- - -

·Lens color

Replace the ☐ mark by the lens color code

Color	Green	Red	White	Blue	Yellow	Orange
Code	G	R	W	S	Υ	Α

Note: AR22V5L type: Red, yellow only

·Contact arrangements

Contact arrangements other than above are available

Contact arrangement	1NO	1NC	1N0	D+1NC	2NO	2NC	3NO
Code	10	01	11		20	02	30
Contact arrangement	3NC	2NO+2	2NC	4NO	4NC	5NO	5NC
Code	03	22		40	04	50	05

Available numbers of contact blocks

Operation	Without transformer	With transformer
Momentary action	5-contact block	3-contact block
Alternate action Push-lock, turn-reset	3-contact block	2-contact block

Voltage

Replace the ■ mark by the lamp voltage code

Transformer		Code LED	Incandescent
Without transformer	6V DC 6V AC 5.5V AC/DC 12V AC/DC 15V AC/DC 20V AC/DC 24V AC/DC	6 A — B C — E	
With transformer	100-110V AC 115-127V AC 200-220V AC 230-254V AC 350-380V AC 400-440V AC 480V AC 500-550V AC	H L M Q S T V	H L M Q S T V



Pushbuttons **AR22**

■ Pushbutton switches

Operator	Contact	Momentary action Type	Alternate action Type		Operator	Contact	Momentary action Type	Alternate action Type
Flush round head	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22F0R-10 AR22F0R-01 AR22F0R-11 AR22F0R-20 AR22F0R-02 AR22F0R-22	AR22F5R-10 AR22F5R-01 AR22F5R-11 AR22F5R-20 AR22F5R-02 AR22F5R-22		Flush with full guard (24mm dia.)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22G2R-01 □ AR22G2R-11 □ AR22G2R-20 □ AR22G2R-02 □	AR22G7R-10 ☐ AR22G7R-01 ☐ AR22G7R-11 ☐ AR22G7R-20 ☐ AR22G7R-02 ☐ AR22G7R-22 ☐
Extended round head	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22E0R-10 AR22E0R-01 AR22E0R-11 AR22E0R-20 AR22E0R-02 AR22E0R-22	AR22E5R-10 AR22E5R-01 AR22E5R-11 AR22E5R-20 AR22E5R-02 AR22E5R-22		Mushroom head with full guard (40mm dia.)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22M3R-01 ☐ AR22M3R-11 ☐ AR22M3R-20 ☐ AR22M3R-02 ☐	AR22M8R-10 AR22M8R-01 AR22M8R-11 AR22M8R-20 AR22M8R-02 AR22M8R-22
Flush round head symbol mark type	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22FAR-01C AR22FAR-11C AR22FAR-20C AR22FAR-02C	AR22FBR-10C AR22FBR-01C AR22FBR-11C AR22FBR-20C AR22FBR-02C AR22FBR-22C		Extended with half guard	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22G0R-01 □ AR22G0R-11 □ AR22G0R-20 □ AR22G0R-02 □	AR22G5R-10 AR22G5R-01 AR22G5R-01 AR22G5R-20 AR22G5R-02 AR22G5R-02
Extended round head symbol mark type	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22EAR-01C AR22EAR-11C AR22EAR-20C AR22EAR-02C	AR22EBR-10C AR22EBR-01C AR22EBR-11C AR22EBR-20C AR22EBR-02C AR22EBR-22C		Push-lock, turn-reset (40mm dia. with white arrow)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	- - - - -	AR22V5R-10 AR22V5R-01 AR22V5R-11 AR22V5R-20 AR22V5R-02 AR22V5R-02
Mushroom head (40mm dia.)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22M0R-01	AR22M5R-10 AR22M5R-11 AR22M5R-20 AR22M5R-02 AR22M5R-22	_	Flush square head	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22F0S-10	AR22F5S-10 AR22F5S-01 AR22F5S-11 AR22F5S-20 AR22F5S-02 AR22F5S-22
Mushroom head (29mm dia.)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22M4R-01	AR22M9R-10 AR22M9R-01 AR22M9R-11 AR22M9R-20 AR22M9R-02 AR22M9R-22	_	Extended square head AF94-296	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC		AR22E5S-10 AR22E5S-01 AR22E5S-11 AR22E5S-20 AR22E5S-02 AR22E5S-22
Extended with full guard (24mm dia.)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22G3R-01 □ AR22G3R-11 □ AR22G3R-20 □ AR22G3R-02 □	AR22G8R-10 AR22G8R-01 AR22G8R-11 AR22G8R-20 AR22G8R-02 AR22G8R-22	-	Flush round head with square bezel	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22F0Y-10 AR22F0Y-01 AR22F0Y-11 AR22F0Y-20 AR22F0Y-02 AR22F0Y-22	AR22F5Y-01□ AR22F5Y-11□ AR22F5Y-20□ AR22F5Y-02□

Note: ■ □ See page 21



Operator	Contact	Momentary action Type	Alternate action Type
Extended round head with square bezel	2NO 2NC	AR22E0Y-01	AR22E5Y-20 ☐ AR22E5Y-02 ☐

Operator	Contact	Momentary action Type	Alternate action Type
Mushroom head with square bezel (29mm dia.)	2NO 2NC	AR22M4Y-10	_

·Button color

Replace the ☐ mark by the button color code

Color	Green	Red	White	Blue	Yellow	Orange	Black
Code	G	R	W	S	Υ	Α	В

Note: AR22V5R type: Red, yellow, black only

·Contact arrangements

Contact arrangements other than above are available

Contact arrangement	1NO	1NC	1NO+1NC	2NO	2NC	3NO	3NC
Code	10	01	11	20	02	30	03

Contact arrangement	2NO+2NC	4NO	4NC	5NO	5NC	3NO+3NC
Code	22	40	04	50	05	33

·Available numbers of contact blocks

	Alternate action Push-lock, turn-reset
6-contact block	4-contact block

•Symbol mark (For AR22FAR, FBR, EAR, EBR)

Replace the ■ mark by the symbol mark code

Symbol mark	0		I		(T)			I	T
Color of button	White	Black	White	Black	White	Black	Clear		
Color of mark	Red		Green		Green		Black		
Code	01	02	03	04	11	12	02B	04B	12B


Pushbuttons **AR22**

Operator Contact	Contact (The following			Contact operation						
	contact is only available.)			Contact blo	ock	Left		Right		
			Mounting position	Туре	Free	Depressed	Free	Depressed		
Pushbutton with selector ring	2NO+2NC	Green Red	AR22S1R-22G AR22S1R-22R	(1)	NC	_	_	•	_	
2-position)		Black White	AR22S1R-22B AR22S1R-22W	(2)	NC	_	_	•	_	
		Yellow Orange	AR22S1R-22Y AR22S1R-22A	(3)	NO	_	•	_	•	
	Blue	AR22S1R-22S	(4)	NO	_	•	_	•		
	2NO	Green Red	AR22S2R-20G AR22S2R-20R	(1)	NO	-	0•	_	_	
AF94-355		Black	AR22S2R-20B AR22S2R-20W	(2)	NO	- C) –	_	•	
	Yellow AR22S2R-20Y Orange AR22S2R-20A Blue AR22S2R-20S			6						
	2NO+2NC	Green Red	Red AR22S2R-22R Black AR22S2R-22B White AR22S2R-22W Gellow AR22S2R-22Y Drange AR22S2R-22A	(1)	NC	•	_			
		Black White		(2)	NC			•	_	
		Yellow Orange		(3)	NO	_	•	_	_	
		Blue		(4)	NO	_	_	_	•	
	2NO+2NC	Green Red	AR22S3R-22G AR22S3R-22R	(1)	NC	_	_			
		Black White	AR22S3R-22B AR22S3R-22W	(2)	NC			_	_	
		Yellow Orange	AR22S3R-22Y AR22S3R-22A	(3)	NO	_	•	_	_	
		Blue	AR22S3R-22S	(4)	NO	_	_	_	•	
	2NO+2NC	Green Red	AR22S6R-22G AR22S6R-22R	(1)	NC	•	_	_		
	Black White	AR22S6R-22B	(2)	NC	•	_	_	Locked		
		Yellow	AR22S6R-22W AR22S6R-22Y	(3)	NO	_	•	•	Locked	
		Orange Blue	AR22S6R-22A AR22S6R-22S	(4)	NO	_	•	•		

Note: (1) to (4): Contact block mounting position

Contact closedContact open

Position of contact block





■ Emergency stop pushbutton switches

⊕ (Direct opening action), conform to EN418

Operator	Contact	Туре
——————————————————————————————————————	Contact	туре
Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	1NC 1NO+1NC 2NC 2NO+2NC	AR22V0R-01R AR22V0R-11R AR22V0R-02R AR22V0R-22R
Push-lock, turn-reset (40mm dia.)	1NC 1NO+1NC 2NC 2NO+2NC	AR22V2R-01R AR22V2R-11R AR22V2R-02R AR22V2R-22R
Push-lock, turn-reset (Soft-touch 29mm dia. with white arrow)	1NC 1NO+1NC 2NC 2NO+2NC	AR22VSR-01R AR22VSR-11R AR22VSR-02R AR22VSR-22R
Push-lock, turn-reset (29mm dia.)	1NC 1NO+1NC 2NC 2NO+2NC	AR22V4R-01R AR22V4R-11R AR22V4R-02R AR22V4R-22R

Operator	Contact	Туре
Key release push-lock, turn-reset (40mm dia.)	1NC 1NO+1NC 2NC 2NO+2NC	AR22V7R-01R AR22V7R-11R AR22V7R-02R AR22V7R-22R
Push-lock, pull-reset (35mm dia.)	1NC 1NO+1NC 2NC	AR22Q2R-01R AR22Q2R-11R AR22Q2R-02R
Unibody push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	1NC 1NO+1NC 2NC	AR22VGE-01R AR22VGE-11R AR22VGE-02R

Note: • Button color: Red only

·Contact arrangements

Contact arrangements other than above are available

Contact	1NO	1NO+1NC	2NC	3NC	2NO+2NC	4NC
arrangement						
Code	01	11	02	03	22	04

Note: • Except AR22Q2R and AR22VGE
• For AR22Q2R and AR22VGE, up to 2-contact block.



Emergency Stop Illuminated Pushbuttons **AR22**

■ Emergency stop illuminated pushbutton switches

(Direct opening action), conform to EN418

Operator	Transformer	Contact	LED lamp Type	Incandescent lamp Type	Neon lamp Type
Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	Without	1NC 1NO+1NC 2NC 3NC	AR22V0L-01■3R AR22V0L-11■3R AR22V0L-02■3R AR22V0L-03■3R	AR22V0L-01■4R AR22V0L-11■4R AR22V0L-02■4R AR22V0L-03■4R	_ _ _ _
AF97-76	With	1NC 1NO+1NC 2NC	AR22V0L-01■3R AR22V0L-11■3R AR22V0L-02■3R	AR22V0L-01■4R AR22V0L-11■4R AR22V0L-02■4R	_ _ _
Push-lock, turn-reset (40mm dia.)	Without	1NC 1NO+1NC 2NC 3NC	AR22V2L-01m3R AR22V2L-11m3R AR22V2L-02m3R AR22V2L-03m3R	AR22V2L-01■4R AR22V2L-11■4R AR22V2L-02■4R AR22V2L-03■4R	_ _ _ _
AF94-307	With	1NC 1NO+1NC 2NC	AR22V2L-01■3R AR22V2L-11■3R AR22V2L-02■3R	AR22V2L-01■4R AR22V2L-11■4R AR22V2L-02■4R	_ _ _
Push-lock, turn-reset (Soft-touch 40mm dia. transparent in all colors with white arrow)	Without	1NC 1NO+1NC 2NC 3NC	AR22VDL-01■3R AR22VDL-11■3R AR22VDL-02■3R AR22VDL-03■3R	AR22VDL-01■4R AR22VDL-11■4R AR22VDL-02■4R AR22VDL-03■4R	_ _ _ _
	With	1NC 1NO+1NC 2NC	AR22VDL-01■3R AR22VDL-11■3R AR22VDL-02■3R	AR22VDL-01■4R AR22VDL-11■4R AR22VDL-02■4R	_ _ _
Push-lock, turn-reset (40mm dia. transparent in all colors)	Without	1NC 1NO+1NC 2NC 3NC	AR22VAL-01■3R AR22VAL-11■3R AR22VAL-02■3R AR22VAL-03■3R	AR22VAL-01=4R AR22VAL-11=4R AR22VAL-02=4R AR22VAL-03=4R	_ _ _ _
AF94-364	With	1NC 1NO+1NC 2NC	AR22VAL-01■3R AR22VAL-11■3R AR22VAL-02■3R	AR22VAL-01■4R AR22VAL-11■4R AR22VAL-02■4R	_ _ _
Push-lock, turn-reset (Soft-touch 29mm dia. with white arrow)	Without	1NC 1NO+1NC 2NC 3NC	AR22VSL-01■3R AR22VSL-11■3R AR22VSL-02■3R AR22VSL-03■3R	AR22VSL-01m4R AR22VSL-11m4R AR22VSL-02m4R AR22VSL-03m4R	- - -
AF99-316	With	1NC 1NO+1NC 2NC	AR22VSL-01■3R AR22VSL-11■3R AR22VSL-02■3R	AR22VSL-01■4R AR22VSL-11■4R AR22VSL-02■4R	_ _ _
Unibody push-lock, turn-reset (Soft-touch 40mm dia.	Without	1NC	AR22VGF-01E3R	_	AR22VGF-01■1R
with white arrow)		1NO+1NC 2NC	AR22VGF-11E3R AR22VGF-02E3R	_	AR22VGF-11■1R AR22VGF-02■1R

Notes: • Button color: Red only • AR22VGF type: Lamp circuit contacts are provided, see page 43. • Contact arrangements indicated in the table can be supplied.

Voltage

Replace the ■ mark by the lamp voltage code

Transformer		Code LED	Incandescent	Neon
Without	6V DC 6V AC 5V AC/DC 12V AC/DC 15V AC/DC 20V AC/DC 24V AC/DC 110V AC 120V AC 220V AC 240V AC	6 A B C E	- 5 - C D E - -	_ _ H К М Р

Transformer		Code LED	Incandescent
With	100-110V AC 115-127V AC 200-220V AC 230-254V AC 350-380V AC 400-440V AC 480V AC 500-550V AC	H L M Q S T V W	H L M Q S T V

Notes: AR22VGF: LED 24V AC/DC and neon only



■ Selector switches

2-position

Operator	Or Operation Knob color or Contact Type key removable Switch with Switch with				Switch with	Contact opera	ation (Example)
		position		round bezel	square bezel	Contact arrangement	Operator position
						anangement	Left Right
Knob	Maintained each 90°	Color code: B: Black (Standard) Color other than above are available	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22PR-210B AR22PR-201B AR22PR-211B AR22PR-220B AR22PR-202B AR22PR-202B	AR22PY-210B AR22PY-201B AR22PY-211B AR22PY-220B AR22PY-202B AR22PY-202B	1NO (1)	Upper contact ③
AF94-310	Spring return S 60°	(G: Green R: Red	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22PR-010B AR22PR-001B AR22PR-011B AR22PR-020B AR22PR-002B AR22PR-002B	AR22PY-010B AR22PY-001B AR22PY-011B AR22PY-020B AR22PY-002B	1NC (1) 1NO+1NC	Upper contact ①
Lever	Maintained each 90°		1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22WR-210B AR22WR-201B AR22WR-211B AR22WR-220B AR22WR-202B AR22WR-202B	AR22WY-210B AR22WY-201B AR22WY-211B AR22WY-220B AR22WY-202B AR22WY-202B	(1)	③
AF94-324	Spring return S 60°		1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22WR-010B AR22WR-001B AR22WR-011B AR22WR-020B AR22WR-002B AR22WR-002B	AR22WY-010B AR22WY-001B AR22WY-011B AR22WY-020B AR22WY-002B AR22WY-002B	2NO+2NC (1)	Upper contact ③ ④
Cylindrical knob	Maintained each 90°	Cocc	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22RR-210B AR22RR-201B AR22RR-211B AR22RR-220B AR22RR-202B AR22RR-202B	AR22RY-210B AR22RY-201B AR22RY-211B AR22RY-220B AR22RY-202B AR22RY-202B	(3)	3 — 4 4 Lower contact 1 — 2
AF94-308	Spring return 60°		1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22RR-010B AR22RR-001B AR22RR-011B AR22RR-020B AR22RR-002B AR22RR-002B	AR22RY-010B AR22RY-001B AR22RY-011B AR22RY-020B AR22RY-002B AR22RY-002B	(4) Upper cont	① • 2
Key	Maintained each 90°	■: Key removable position (): Key type See page 27	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22J□R-2■01 AR22J□R-2■11 AR22J□R-2■20 AR22J□R-2■02	() AR22JY-2m10() () AR22JY-2m01() () AR22JY-2m11() () AR22JY-2m20() () AR22JY-2m02() () AR22JY-2m22()	(3) (1)	Release arm Operator
AF94-311	Spring return S 60°		1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR22J□R-0A01 AR22J□R-0A11 AR22J□R-0A20 AR22J□R-0A02	() AR22JY-0A10() () AR22JY-0A01() () AR22JY-0A11() () AR22JY-0A20() () AR22JY-0A02() () AR22JY-0A02()	Lower con	Contact block

Notes: • (1) to (4): Contact block mounting position

• ① – ②, ③ – ④: Contact block terminal No.

Contact closed

Operator

Replace the \square mark by the cylinder key type code Standard type: Blank

Long durability type: A

[•] Contact arrangements: See page 27

Selector Switches AR22

Maintained Color code Secondari) Color code Secondario Color code Col	3-position								
Maintained each 45' Spring/manual return each 45' each 45	Operator	Operation	Knob color	Contact	Type Switch with	Switch with	Contact of	peration (Exam	iple)
Maintained each 45' Color obdeted Color					round bezel	square bezel		Operation pos	tion
Springmanual return									
Control of the content of the cont	Knob	Maintained					1NO+1NC	I ~ ' '	Lower contact
Argumentation Circle Cir		each 45°	(Standard)	2NC	AR22PR-302B	AR22PY-302B	(1) (2)		
## Spring/manual return ## Spring/manual return ## Spring/manual return ## Back 45' ## Spring/manual return ## Back 45' ## Spring/manual return ## Back 45' ## Spring/manual return ## Spring/manual return ## Spring/manual return ## Spring/manual return ## Back 45' ## Back 4									
1NO+1NC AR22PR-121B AR22PY-121B AR22PY-121B AR22PY-122B AR22	fra .	(2NC	AR22PR-602B	AR22PY-602B			
### AR22PR-720B ## AR22PR-722B ## AR							1NO+1NC	Upper contact	Lower contact
Spring return Spring retur		return						3	
each 45' each 45' each 45' Spring/manual return Each 45' Each 45'				2NO+2NC	AR22PR-722B	AR22PY-722B	, , ,	1 1 14	@
### deach 45' Beach 45'		Spring return		2NO+2NC	AR22PR-122B	AR22PY-122B	2NO+2NC	l	Lower contact
APD-1244 APD-1245	AF94-310	***					(1) (2)		
### AP34-328 ### AP32-328 ##		each 45°						3 1 1	3 _{1 1 1}
Rach 45'							(3) (4)	1 1 1 4	4
Spring/manual return	Lever	Maintained	2 2 2				1NO+1NC		Lower contact
Page		each 45°					(1) (2)	 	
2 2 2 2 2 2 2 2 2 2									
NO+1NC 2NO 2	D	(2NC					
AF94-308 Spring return Spring/manual return each 45* Spring/manual return each 45* Spring return Sprin			SC	1NO+1NC	AR22WR-711B		1NO+1NC	_Upper contact	Lower contact
2NO+2NC AR22WR-722B AR22WY-722B Control Contro				2NC	AR22WR-702B AR22WY-70	AR22WY-702B	(1) (2)		
Cylindrical knob									
Cylindrical knob		Spring return		2NO+2NC	AR22WR-122B	AR22WY-122B		Upper contact	
Cylindrical knob	AF94-324						(1) (2)	2	
NO+1NC 2NO 2NC 2NO+2NC 2NO		each 45°					(3) (4)	3	
Pack									4
Spring/manual return	Cylindrical knob	Maintained		2NO	AR22RR-320B	AR22RY-320B	1NO+1NC		Lower contact
Peturn		each 45°					(1) (2)	4	
2NC 2NO+2NC AR22RR-602B AR22RY-602B AR22RY-602B AR22RY-602B AR22RY-602B AR22RY-602B AR22RY-602B AR22RY-602B AR22RY-711B AR22RY-711B AR22RY-711B AR22RY-720B AR22RY-720B AR22RY-720B AR22RY-720B AR22RY-720B AR22RY-722B AR22RY-72B AR22RY-722B A		, ,		-					
Spring/manual return 1NO+1NC 2NO 2NC 2NO+2NC 2NO+2N		(1)		2NC	AR22RR-602B	AR22RY-602B			
Peturn							100+100	Unner contact	Lower contact
2NO+2NC AR22RR-722B AR22RY-722B (1) (2) AR22RR-122B AR22RY-122B 2NO+2NC Upper contact (1) (2) AR22RR-122B AR22RY-122B (3) (4) (3) (4)		return		2NO	AR22RR-720B	AR22RY-720B			
AF94-308							(1) (2)	T ₄	1 2
each 45° (1) (2) (3) (4) (3) (4)	AF94-308	Spring return	2N	2NO+2NC	AR22RR-122B	AR22RY-122B	2NO+2NC	l . ' '	Lower contact
							(1) (2)		2
		0555 450						3 1	3 _{1 1 1}
		each 45					(3) (4)		 •

Contact closed



Operator	Operation	Key removable position	Contact	Type Switch with	Switch with	Contact of	Contact operation (Example)				
		position		round bezel	square bezel	Contact	Operat	or posit	tion		
						arrange- ment	L C	_	L C R		
Key	Maintained each 45°	■: Key removable position (): Key type	1NO+1NC 2NO 2NC 2NO+2NC	AR22J□R-3■11() AR22J□R-3■20() AR22J□R-3■02() AR22J□R-3■22()	AR22JY-3■20() AR22JY-3■02()		Upper o	contact	Lower contact		
	Spring/manual return each 45°		1NO+1NC 2NO 2NC 2NO+2NC	AR22J□R-6■11() AR22J□R-6■20() AR22J□R-6■02() AR22J□R-6■22()	AR22JY-6■20() AR22JY-6■02()		>				
	Spring/manual return each 45°		1NO+1NC 2NO 2NC 2NO+2NC	AR22J□R-7■11() AR22J□R-7■20() AR22J□R-7■02() AR22J□R-7■22()	AR22JY-7■20() AR22JY-7■02()		Upper o	contact	Lower contact		
AF94-311	Spring return		2NO+2NC	AR22J□R-1E22()	AR22JY-1E22()	2NO+2NC (1) (2)	Upper o	contact	Lower contact		
	each 45°			(0)		(3) (4)	3	4	3 4 4		

Notes: Operator position L:Left, C:Center, R:Right

- (1) to (4): Contact block mounting position
- ① ②, ③ ④: Contact block terminal No.

·Contact arrangements

Contact arrangements other than above are available

Contact arrangement	1NO	1NC	1NO	+1NC	2N	10	2NC	31	NO	3NC
Code	10	01	11		20		02	30)	03
Contact arrangement	2NO+	2NC	4NO	4NC		5NC	5N0)	3NC	D+3NC
Code	22		40	04		50	05		33	

·Available numbers of contact blocks

Mainted	Spring return Spring/manual return
6-contact block	4-contact block

· Key removable positions


Code	Α	В	С	D	Е	F	G
Removable position	\$5°, 45°,	\$5° 45°	\$5° - 45°	45°, 45°,	450	₩, 48°	\$5° 45°
AR22J□R-2 AR22J□R-0 AR22J□R-3 AR22J□R-6 AR22J□R-7 AR22J□R-1	• • • -	• - • - -	- - - - -	• - • - -	- - • •	- - • •	- - - - -

●: Available —: Not available

· Key code No.

Replace the () mark with one of the following key code. A, B, C, D, E and F Standard key code is A.

· Position of contact block



Operator

Replace the \square mark by the cylinder key type code Standard type: Blank Long durability type: A

Selector Switches **AR22**

■ Selector switches (control type)

3-	n	റ	S	i	ti	n	n
J-	μ	u	J	ш	u	u	ш

Operator	Operation	Knob color or key removable position	Contact arrangement	Type Switch with round bezel	Switch with square bezel
Knob	Maintained each 45°	Color code: B: Black (Standard)	Replace the ■ mark by the contact arrangement code	AR22PCR-3■B	AR22PCY-3■B
	Spring/manual return ① each 45°	Color other than above are available	(shown on next page).	AR22PCR-6■B	AR22PCY-6■B
1	Spring/manual return teach 45°	(G: Green R: Red		AR22PCR-7■B	AR22PCY-7■B
AF94-435	Spring return † each 45°			AR22PCR-1■B	AR22PCY-1■B
Lever	Maintained each 45°	n a (;	Replace the ■ mark by the contact arrangement code	AR22WCR-3■B	AR22WCY-3■B
	Spring/manual return ① each 45°		(shown on next page).	AR22WCR-6■B	AR22WCY-6■B
Bon	Spring/manual return (1) each 45°			AR22WCR-7■B	AR22WCY-7■B
AF94-436	Spring return (†) each 45°			AR22WCR-1■B	AR22WCY-1■B
Cylindrical knob	Maintained each 45°		Replace the ■ mark by the contact arrangement code	AR22RCR-3■B	AR22RCY-3■B
	Spring/manual return ① each 45°		(shown on next page).	AR22RCR-6■B	AR22RCY-6■B
	Spring/manual return teach 45°		•	AR22RCR-7■B	AR22RCY-7■B
AF94-433	Spring return the each 45°	CO.		AR22RCR-1■B	AR22RCY-1■B
Key	Maintained each 45°	Replace the mark by the key removable	Replace the ■ mark by the contact arrangement code	AR22JCR-3□■()	AR22JCY-3 ■ □()
	Spring/manual return ① each 45°	position code: A, B, C, D, E	(shown on next page).	AR22JCR-6□■()	AR22JCY-6 ■ □()
S	Spring/manual return each 45°	F or G		AR22JCR-7□■()	AR22JCY-7 ■ □()
AF94-434	Spring return the each 45°			AR22JCR-1E■()	AR22JCY-1E ■ ()

· Key removable positions

Code	А	В	С	D	Е	F	G
Removable position	N5. 45°	\$\$\frac{1}{2}\frac{1}{	\$5° 48°	45, 45,	\$5°	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$
AR22JCR-3 AR22JCR-6 AR22JCR-7 AR22JCR-1	• - • -	• - - -	• - - -	• • - -	•	• • - -	• - • -

●: Available -: Not available

•Key code No.
Replace the () mark with one of the following key code.
A, B, C, D, E and F
Standard key code is A.



 Contac 	t arrangement	t code	(Typical	exampl	le)	١
----------------------------	---------------	--------	----------	--------	-----	---


Contact arrange-	Contact arrange-	Contact operation							
ment ment		Contact blo	ock	Operator position					
	code	Mounting position	Туре	Left	Center	Right			
2NC	01F	(1)	NC						
		(2)	NC						
		_	_	_	_	_			
		_	_	_	_	_			
2NO+2NC	014	(1)	NC						
		(2)	NC						
		(3)	NO			•			
		(4)	NO	•					
4NC	01J	(1)	NC						
		(2)	NC						
		(3)	NC						
		(4)	NC						
2NO+2NC	024	(1)	NC						
		(2)	NC		•				
		(3)	NO						
		(4)	NO	•					
2NO+2NC	03C* (Maintained	(1)	NC						
	only)	(2)	NC			•			
		(3)	NO			•			
		(4)	NO						
2NO+2NC	044*	(1)	NC						
		(2)	NC		•				
		(3)	NO			•			
		(4)	NO	•					
2NO+2NC	054	(1)	NC						
		(2)	NC		•				
		(3)	NO			•			
		(4)	NO			•			

Contact arrange- ment	Contact arrange-	Contact operation						
	ment code	Contact blo	ock	Operator	Operator position			
	code	Mounting position	Туре	Left	Center	Right		
2NO+2NC	064	(1)	NC					
		(2)	NC		•			
		(3)	NO	•				
		(4)	NO			•		
1NO+1NC	07F	(1)	NC					
		(2)	NO			•		
		-	_	_	_	_		
		-	_	_	_	_		
2NO+2NC	07C* (Maintained only)	(1)	NC					
		(2)	NC			•		
		(3)	NO	•				
		(4)	NO	•				
2NO+2NC	084	(1)	NC					
		(2)	NC		•			
		(3)	NO	•				
		(4)	NO	•				
2NO+2NC	094*	(1)	NC					
		(2)	NC		•			
		(3)	NO	•				
		(4)	NO			•		
2NO+2NC	104	(1)	NC		•			
		(2)	NC		•			
		(3)	NO	•		•		
		(4)	NO	•		•		
2NO+2NC	11C*	(1)	NC		•			
	(Maintained only)	(2)	NC			•		
		(3)	NO	•		•		
		(4)	NO	•				

Notes: •: Contact closed Blank: Contact open

* There may be some overlap in the contact when switching between notches.

Position of contact block



Contact

arrange-

ment

Contact

arrange-

ment code Contact operation

Type

Left

Operator position

Center

Right

Contact block

Mounting


Selector Switches **AR22**

· Contact arrangement code (Typical example)

		ment cod		cal exan	iple)			
Contact arrange-	Contact arrange-	Contact operation						
	ment	Contact blo	ock	Operator position				
	code	Mounting position	Туре	Left	Center	Right		
2NO+2NC	124*	(1)	NC		•			
		(2)	NC		•			
		(3)	NO	•		•		
		(4)	NO	•				
2NO+2NC	134*	(1)	NC		•			
211012110	104	(2)	NC		•			
		(3)	NO					
		(4)	NO			•		
3NO+1NC	14D*	(1)	NO	•				
0.101.110	(Maintained only)	(2)	NC		•			
		(3)	NO	•				
		(4)	NO			•		
3NO+1NC	15A*	(1)	NO			•		
		(2)	NC		•			
		(3)	NO					
		(4)	NO	•				
2NO+2NC	164	(1)	NC		•			
		(2)	NC					
		(3)	NO	•				
		(4)	NO					
2NO+2NC	174*	(1)	NC		•			
		(2)	NC		•			
		(3)	NO	•				
		(4)	NO			•		
2NO+2NC	184	(1)	NC		•			
		(2)	NC		•			
		(3)	NO		-	•		
		(4)	NO			•		

Notes: ●: Contact closed Blank: Contact open

· Position of contact block



Notes: Contact block color NC: red NO: blue

^{*} There may be some overlap in the contact when switching between notches.




4, 5-position

Operator	Contact (The following contact is only available.)	Operation	Knob color	Contact arrangement	Type Switch with round bezel	Switch with square bezel
Knob 2NO	2NO+2NC	4-position maintained	Color code: B: Black (Standard) Color other than	Replace the ■ mark by the contact arrangement code	AR22PCR-4■B	AR22PCY-4■B
		5-position maintained	above are available (G: Green R: Red	ailable : Green	AR22PCR-5■B	AR22PCY-5■B
2NO+2NO	2NO+2NC	4-position maintained			AR22WCR-4■B	AR22WCY-4■B
		5-position maintained		"es.	AR22WCR-5■B	AR22WCY-5■B
Cylindrical knob	2NO+2NC	4-position maintained		COL	AR22RCR-4■B	AR22RCY-4■B
AF94-433		5-position maintained			AR22RCR-5■B	AR22RCY-5∎B

• Contact arrangement code

Position	Contact			Contact operation					
	arrange- ment	arrange- ment	Contact block		Operator position				
		code	Mounting position	Туре	1 2 3 4 5				
4-position 2NO+2NC	41C* (Maintained	(1)	NC	+++					
		only)	(2)	NC	+ -				
			(3)	NO	- - -				
			(4)	NO					
5-position	2NO+2NC	51C* (Maintained	(1)	NC					
		only)	(2)	NC					
			(3)	NO	+ + + + + + + + + + + + + + + + + + + +				
			(4)	NO					
				1					

· Position of contact block



Operator position 4-position 5-5-position





Notes: ●: Contact closed

* There may be some overlap in the contact when switching between notches.

Illuminated Selector Switches **AR22**

■ Illuminated selector switches 2-position

Operator	Operation	Contact	LED lamp		Incandescent la	Incandescent lamp		
			Transformer	Туре	Transformer	Туре		
Knob	Maintained	1NO 1NC 1NO+1NC 2NO+2NC	Without	AR22PL-210■3□ AR22PL-201■3□ AR22PL-211■3□ AR22PL-222■3□	Without	AR22PL-210■4□ AR22PL-201■4□ AR22PL-211■4□ AR22PL-222■4□		
AF94-306	each 90°	1NO 1NC 1NO+1NC 2NO	With	AR22PL-210■3□ AR22PL-201■3□ AR22PL-211■3□ AR22PL-220■3□	With	AR22PL-210■4□ AR22PL-201■4□ AR22PL-211■4□ AR22PL-220■4□		
	Spring return	1NO 1NC 1NO+1NC 2NO	Without	AR22PL-010■3□ AR22PL-001■3□ AR22PL-011■3□ AR22PL-020■3□	Without	AR22PL-010■4□ AR22PL-001■4□ AR22PL-011■4□ AR22PL-020■4□		
	60°	1NO 1NC 1NO+1NC 2NO	With	AR22PL-010■3□ AR22PL-001■3□ AR22PL-011■3□ AR22PL-020■3□	With	AR22PL-010■4□ AR22PL-001■4□ AR22PL-011■4□ AR22PL-020■4□		
Knob with square pezel	Maintained	1NO 1NC 1NO+1NC 2NO+2NC	Without	AR22PP-210 m 3 AR22PP-201 m 3 AR22PP-211 m 3 AR22PP-222 m 3	Without	AR22PP-210■4 □ AR22PP-201■4 □ AR22PP-211■4 □ AR22PP-222■4 □		
AF94-360	each 90°	1NO 1NC 1NO+1NC 2NO	With	AR22PP-210m3 AR22PP-201m3 AR22PP-211m3 AR22PP-220m3	With	AR22PP-210■4 AR22PP-201■4 AR22PP-211■4 AR22PP-220■4		
	Spring return	1NO 1NC 1NO+1NC 2NO	Without	AR22PP-010 m 3	Without	AR22PP-010■4 ☐ AR22PP-001■4 ☐ AR22PP-011■4 ☐ AR22PP-020■4 ☐		
	© 60°	1NO 1NC 1NO+1NC 2NO	With	AR22PP-010m3 AR22PP-001m3 AR22PP-011m3 AR22PP-020m3	With	AR22PP-010■4 ☐ AR22PP-001■4 ☐ AR22PP-011■4 ☐ AR22PP-020■4 ☐		

3-position

Operator	Operation		Contact	LED lamp		Incandescent la	amp
				Transformer	Туре	Transformer	Туре
Knob	Maintained		1NO+1NC 2NO+2NC	Without	AR22PL-311■3□ AR22PL-322■3□	Without	AR22PL-311■4 □ AR22PL-322■4 □
	each 45°		1NO+1NC	With	AR22PL-311 ≡ 3□		AR22PL-311 ■ 4 □
	Spring/manual return	(1NO+1NC 1NO+1NC	Without With	AR22PL-611■3□ AR22PL-611■3□	Without With	AR22PL-611■4 ☐ AR22PL-611■4 ☐
AF94-306	each 45°	\bigcirc	1NO+1NC 1NO+1NC	Without With	AR22PL-711■3□ AR22PL-711■3□	Without With	AR22PL-711■4 ☐ AR22PL-711■4 ☐
Knob with square bezel	Maintained		1NO+1NC 2NO+2NC	Without	AR22PP-311■3□ AR22PP-322■3□	Without	AR22PP-311■4□ AR22PP-322■4□
The	each 45°		1NO+1NC	With	AR22PP-311 ≡ 3□		AR22PP-311 ■ 4□
AF94-360	Spring/manual return	\bigcirc	1NO+1NC 1NO+1NC	Without With	AR22PP-611■3□ AR22PP-611■3□	Without With	AR22PP-611■4□ AR22PP-611■4□
	each 45°	1	1NO+1NC 1NO+1NC	Without With	AR22PP-711■3□ AR22PP-711■3□	Without With	AR22PP-711■4□ AR22PP-711■4□

Note: □, ■ See page 33



· Replace the ■ mark by the following lamp voltage code

			<u> </u>
Transformer	Voltage	Code LED	Incandescent
Without	5V AC/DC 6V DC 6V AC 12V AC/DC 15V AC/DC 20V AC/DC 24V AC/DC	- 6 A B C - E	5 - - - C D E
With	100-110V AC 115-127V AC 200-220V AC 230-254V AC 350-380V AC 400-440V AC 480V AC 500-550V AC	H L M Q S T V W	H L M Q S T V

• Replace the \square mark by the following knob color code

Color	Green	Red	White	Blue	Yellow	Orange
Code	G	R	W	S	Υ	Α

• Up to 4-contact of contact arrangement can be made. Available numbers of contacts are as follow.

7174114514	Available Hambers of contacts are as follow.							
No. of position	Operation	Without transformer	With transformer					
2-position	Maintained	4-contact	3-contact					
	Spring return	3-contact	2-contact					
3-position	Maintained	4-contact	3-contact					
	Spring/manual return	3-contact	2-contact					

Contact arrangement and operator position

2-position

Transformer	Contact	Contact blo	ock	Operator	position
	arrangement	Mounting	Туре	Left	Right
With/without	1NO	(1)	NO	-	•
With/without	1NC	(1)	NC	•	-
Without	1NO+1NC	(1)	NO	_	
		(2)	NC	•	
With	1NO+1NC	(1)	NC	•	-
		(2)	NO	-	•
With/without	2NO	(1)	NO		•
		(2)	NO	10 -	•
Without	2NO+2NC	(1)	NO	_	•
	*1	(2)	NC	•	_
		(3)	NO	_	•
		(4)	NC	•	_

Notes: *1: AR22PL-2, AR22PP-2

● : Contact closed, -: Contact open

3-nosition

Transformer	Contact arrangement	Contact block		Operator position		
		Mounting position	Туре	Left	Center	Right
				\bigcirc	①	\oslash
Without	1NO+1NC	(1)	NO	•	_	_
	*1	(2)	NC	-	_	•
	1NO+1NC	(1)	NO	_	_	•
	*2	(2)	NC	•	_	_
	2NO+2NC	(1)	NO	•	_	_
	*3	(2)	NC	–	_	•
		(3)	NO	•	_	-
		(4)	NC	-	_	•
With	1NO+1NC	(1)	NC	_	_	•
	*1	(2)	NO	•	_	-
	1NO+1NC	(1)	NC	•	_	–
	*2	(2)	NO	-	_	•

Notes: *1: AR22PL-3, 6 AR22PP-3, 6


*3: AR22PL-3 AR22PP-3

*2: AR22PL-7, AR22PP-7


ullet : Contact closed, - : Contact open

Position of contact block

Without transformer



With transformer



Pilot Lights **DR22**

■ Pilot lights/standard

■ Pilot lights/standard	1	1		 	
Lens	Transformer	LED lamp Lamp voltage	Туре	Incandescent lamp Lamp voltage) Type
Dome AF94-333	Without	6V AC	DR22D0L-A3	5.5V AC/DC	DR22D0L-54□
		6V DC 12V AC/DC 24V AC/DC	DR22D0L-63□ DR22D0L-B3□ DR22D0L-E3□	15V AC/DC 24V AC/DC	_ DR22D0L-C4□ DR22D0L-E4□
	With	100–110V AC 200–220V AC	DR22D0L-H3□ DR22D0L-M3□	100-110V AC 200-220V AC	DR22D0L-H4□ DR22D0L-M4□
Extended round AF94-332	Without	6V AC	DR22E3L-A3□ DR22E3L-63□	5.5V AC/DC	DR22E3L-54□
		6V DC 12V AC/DC 24V AC/DC	DR22E3L-63□ DR22E3L-B3□ DR22E3L-E3□	15V AC/DC 24V AC/DC	
	With	100–110V AC 200–220V AC	DR22E3L-H3□ DR22E3L-M3□	100–110V AC 200–220V AC	DR22E3L-H4□ DR22E3L-M4□
Faceted AF96-189	Without	6V AC 6V DC	DR22K0L-A3□ DR22K0L-63□	5.5V AC/DC	DR22K0L-54□
		12V AC/DC 24V AC/DC	DR22K0L-63□ DR22K0L-B3□ DR22K0L-E3□	15V AC/DC 24V AC/DC	DR22K0L-C4□ DR22K0L-E4□
	With	100–110V AC 200–220V AC	DR22K0L-H3□ DR22K0L-M3□	100-110V AC 200-220V AC	DR22K0L-H4□ DR22K0L-M4□
Flush square	Without	6V AC	DR22F3M-A3□	5.5V AC/DC	DR22F3M-54□
		6V DC 12V AC/DC 24V AC/DC	DR22F3M-63□ DR22F3M-B3□ DR22F3M-E3□	15V AC/DC 24V AC/DC	 DR22F3M-C4□ DR22F3M-E4□
	With	100–110V AC 200–220V AC	DR22F3M-H3□ DR22F3M-M3□	100–110V AC 200–220V AC	DR22F3M-H4□ DR22F3M-M4□
Flush square (Transparent lens)	Without	6V AC	DR22F4M-A3□	5.5V AC/DC	DR22F4M-54□
		6V DC 12V AC/DC 24V AC/DC	DR22F4M-63□ DR22F4M-B3□ DR22F4M-E3□	15V AC/DC 24V AC/DC	_ DR22F4M-C4□ DR22F4M-E4□
	With	100-110V AC 200-220V AC	DR22F4M-H3□ DR22F4M-M3□	100-110V AC 200-220V AC	DR22F4M-H4□ DR22F4M-M4□
Flush square (12mm high frame)	Without	6V AC	DR22F5M-A3□	5.5V AC/DC	DR22F5M-54□
		6V DC 12V AC/DC 24V AC/DC	DR22F5M-63□ DR22F5M-B3□ DR22F5M-E3□	15V AC/DC 24V AC/DC	 DR22F5M-C4□ DR22F5M-E4□
	With	100–110V AC 200–220V AC	DR22F5M-H3□ DR22F5M-E3□	100–110V AC 200–220V AC	DR22F5M-H4□ DR22F5M-M4□
Extended square	Without	6V AC	DR22E3M-A3□	5.5V AC/DC	DR22E3M-54□
AF94-380		6V DC 12V AC/DC 24V AC/DC	DR22E3M-63□ DR22E3M-B3□ DR22E3M-E3□	15V AC/DC 24V AC/DC	— DR22E3M-C4□ DR22E3M-E4□
	With	100–110V AC 200–220V AC	DR22E3M-H3□ DR22E3M-M3□	100–110V AC 200–220V AC	DR22E3M-H4□ DR22E3M-M4□
Flush rectangular AF96-237	Without	6V AC	DR22E3N-A3□	5.5V AC/DC	DR22E3N-54□
		6V DC 12V AC/DC 24V AC/DC	DR22E3N-63□ DR22E3N-B3□ DR22E3N-E3□	15V AC/DC 24V AC/DC	
	With	100–110V AC 200–220V AC	DR22E3N-H3□ DR22E3N-M3□	100–110V AC 200–220V AC	DR22E3N-H4□ DR22E3N-M4□
Extended round with square bezel	Without	6V AC	DR22E3P-A3□	5.5V AC/DC	DR22E3P-54□
		6V DC 12V AC/DC 24V AC/DC	DR22E3P-63□ DR22E3P-B3□ DR22E3P-E3□	15V AC/DC 24V AC/DC	_ DR22E3P-C4□ DR22E3P-E4□
	With	100–110V AC 200–220V AC	DR22E3P-H3□ DR22E3P-M3□	100-110V AC 200-220V AC	DR22E3P-H4□ DR22E3P-M4□

Note: ☐ See page 37



■ Pilot lights/short-body without transformer

ens	LED lamp		Incandescent	lamp
	Lamp voltage	Туре	Lamp voltage	Туре
Dome	5.5V AC/DC	_	5.5V AC/DC	DR22D0L-58□
	6V AC 6V DC 12V AC/DC	DR22D0L-A9□ DR22D0L-69□ DR22D0L-B9□	6V AC 6V DC 15V AC/DC	_ _ DR22D0L-C8□
AF98-88	24V AC/DC	DR22D0L-E9□	24V AC/DC	DR22D0L-E8□
Extended round	5.5V AC/DC	_	5.5V AC/DC	DR22E3L-58□
	6V AC 6V DC 12V AC/DC	DR22E3L-A9□ DR22E3L-69□ DR22E3L-B9□	6V AC 6V DC 15V AC/DC	_ _ DR22E3L-C8□
	24V AC/DC	DR22E3L-E9□	24V AC/DC	DR22E3L-E8□
AF98-90				
aceted	5.5V AC/DC	_	5.5V AC/DC	DR22K0L-58□
	6V AC 6V DC 12V AC/DC	DR22K0L-A9□ DR22K0L-69□ DR22K0L-B9□	6V AC 6V DC 15V AC/DC	_ _ DR22K0L-C8□
	24V AC/DC	DR22K0L-E9□	24V AC/DC	DR22K0L-E8□
AF98-89				
Flush square	5.5V AC/DC	_	5.5V AC/DC	DR22F3M-58□
	6V AC 6V DC	DR22F3M-A9□ DR22F3M-69□	6V AC 6V DC	
	12V AC/DC	DR22F3M-09□ DR22F3M-B9□	15V AC/DC	DR22F3M-C8□
AF98-92	24V AC/DC	DR22F3M-E9□	24V AC/DC	DR22F3M-E8□
lush square	5.5V AC/DC	_	5.5V AC/DC	DR22F4M-58□
Transparent lens)	6V AC 6V DC	DR22F4M-A9□ DR22F4M-69□	6V AC 6V DC	
	12V AC/DC	DR22F4M-B9□	15V AC/DC	DR22F4M-C8□
AF98-92	24V AC/DC	DR22F4M-E9□	24V AC/DC	DR22F4M-E8□
Flush square	5.5V AC/DC		5.5V AC/DC	DR22F5M-58□
12mm igh	6V AC 6V DC	DR22F5M-A9□ DR22F5M-69□	6V AC 6V DC	_
rame)	12V AC/DC	DR22F5M-B9□	15V AC/DC	DR22F5M-C8□
AF98-94	24V AC/DC	DR22F5M-E9□	24V AC/DC	DR22F5M-E8□
extended square	5.5V AC/DC	_	5.5V AC/DC	DR22E3M-58□
	6V AC 6V DC 12V AC/DC	DR22E3M-A9□ DR22E3M-69□ DR22E3M-B9□	6V AC 6V DC 15V AC/DC	_ _ DR22E3M-C8□
AF98-93	24V AC/DC	DR22E3M-E9□	24V AC/DC	DR22E3M-E8□
lush rectangular	5.5V AC/DC		5.5V AC/DC	DR22E3N-58□
	6V AC 6V DC 12V AC/DC	DR22E3N-A9□ DR22E3N-69□ DR22E3N-B9□	6V AC 6V DC 15V AC/DC	_ _ DR22E3N-C8□
KK02-234B	24V AC/DC	DR22E3N-E9□	24V AC/DC	DR22E3N-E8□
extended round with	5.5V AC/DC	_	5.5V AC/DC	DR22E3P-58□
quare ezel	6V AC 6V DC 12V AC/DC	DR22E3P-A9□ DR22E3P-69□ DR22E3P-B9□	6V AC 6V DC 15V AC/DC	_ _ DR22E3P-C8□
	24V AC/DC	DR22E3P-E9□	24V AC/DC	DR22E3P-E8

Note: ☐ See page 37

Pilot Lights **DR22**

■ Pilot lights/short-body with transformer

■ Pilot lights/short-body with transformer							
Lens	LED lamp Lamp voltage Type	Incandescent lamp Lamp voltage Type					
Dome AF97-137	100–110V AC DR22D0L-H9 □ 200–220V AC DR22D0L-M9 □	100–110V AC DR22D0L-H8 □ 200–220V AC DR22D0L-M8 □					
Extended round AF97-138	100–110V AC DR22E3L-H9 □ 200–220V AC DR22E3L-M9 □	100–110V AC DR22E3L-H8 □ 200–220V AC DR22E3L-M8 □					
Faceted KK02-130A	100–110V AC DR22K0L-H9 □ 200–220V AC DR22K0L-M9 □	100–110V AC DR22K0L-H8□ 200–220V AC DR22K0L-M8□					
Flush square	100–110V AC DR22F3M-H9□ 200–220V AC DR22F3M-M9□	100–110V AC DR22F3M-H8□ 200–220V AC DR22F3M-M8□					
Flush square (Transparent lens)	100–110V AC DR22F4M-H9□ 200–220V AC DR22F4M-M9□	100–110V AC DR22F4M-H8□ 200–220V AC DR22F4M-M8□					
Flush square (12mm high frame)	100–110V AC DR22F5M-H9 □ 200–220V AC DR22F5M-M9 □	100–110V AC DR22F5M-H8□ 200–220V AC DR22F5M-M8□					
Extended square KK02-134A	100-110V AC DR22E3M-H9 □ 200-220V AC DR22E3M-M9 □	100–110V AC DR22E3M-H8□ 200–220V AC DR22E3M-M8□					
Flush rectangular	100-110V AC DR22E3N-H9 □ 200-220V AC DR22E3N-M9 □	100–110V AC DR22E3N-H8□ 200–220V AC DR22E3N-M8□					
Extended round with square bezel	100–110V AC DR22E3P-H9 □ 200–220V AC DR22E3P-M9 □	100–110V AC DR22E3P-H8□ 200–220V AC DR22E3P-M8□					

Note: \square See page 37



· Lens color

Replace the $\hfill\square$ mark by the following lens color code

Color	Green	Red	White	Blue	Yellow	Orange
Code	G	R	W	S	Υ	Α

· Lamp voltage

Available lamp voltage are as follow.

Description	Voltage	Code			
		Standard type		Short-body type	
		LED	Incandescent	LED	Incandescent
Without transformer	5.5V AC/DC	_	54	_	58
	6V AC	A3	_	A9	-
	6V DC	63	_	69	-(0)
	12V AC/DC	B3	_	B9	
	15V AC/DC	C3	C4	C9	C8
	20V AC/DC	-	D4	-	D8
	24V AC/DC	E3	E4	E9	E8
With transformer	100-110V AC	H3	H4	H9	H8
	115-127V AC	L3	L4	L9	L8
	200-220V AC	M3	M4	M9	M8
	230-254V AC	Q3	Q4	-	_
	350-380V AC	S3	S4		_
	400-440V AC	T3	T4	-	_
	480V AC	V3	V4	-	_
	500-550V AC	W3	W4	-	_
With resistor unit	110V DC	H7	-	-	_


Joy Stick Selector Switches **AR22**

■ Joy stick selector switches

Handle	Terminal	Operating directions	Contact	Туре		
			arrangement	Manual return	Spring return	
Ball type without lock	Screw	1	1NO × 2	AR22A0N-A0A0B	AR22A5N-A0A0B	
			1NO + 1NC × 2	AR22A0N-1010B	AR22A5N-1010B	
		1	1NO × 4	AR22A0N-AAAAB	AR22A5N-AAAAB	
		\longleftrightarrow	1NO + 1NC × 4	AR22A0N-1111B	AR22A5N-1111B	
	Solder/tab	^	1NO + 1NC × 2	AR22A0H-1010B	AR22A5H-1010B	
0			2NO + 2NC × 2	AR22A0H-2020B	AR22A5H-2020B	
		^	1NO + 1NC × 4	AR22A0H-1111B	AR22A5H-1111B	
AF97-49		\longleftrightarrow	2NO + 2NC × 4	AR22A0H-2222B	AR22A5H-2222B	
Ball type with lock	Screw	†	1NO × 2	AR22A1N-A0A0B	AR22A6N-A0A0B	
			1NO + 1NC × 2	AR22A1N-1010B	AR22A6N-1010B	
		^	1NO × 4	AR22A1N-AAAAB	AR22A6N-AAAAB	
		\longleftrightarrow	1NO + 1NC × 4	AR22A1N-1111B	AR22A6N-1111B	
	Solder/tab	↑	1NO + 1NC × 2	AR22A1H-1010B	AR22A6H-1010B	
0			2NO + 2NC × 2	AR22A1H-2020B	AR22A6H-2020B	
		1	1NO + 1NC × 4	AR22A1H-1111B	AR22A6H-1111B	
AF97-45		\longleftrightarrow	2NO + 2NC × 4	AR22A1H-2222B	AR22A6H-2222B	
Rubber cap type	Screw	1	1NO × 2	AR22A2N-A0A0B	AR22A7N-A0A0B	
without lock			1NO + 1NC × 2	AR22A2N-1010B	AR22A7N-1010B	
		1	1NO × 4	AR22A2N-AAAAB	AR22A7N-AAAAB	
		\longleftrightarrow	1NO + 1NC × 4	AR22A2N-1111B	AR22A7N-1111B	
	Solder/tab	1	1NO + 1NC × 2	AR22A2H-1010B	AR22A7H-1010B	
			2NO + 2NC × 2	AR22A2H-2020B	AR22A7H-2020B	
		1	1NO + 1NC × 4	AR22A2H-1111B	AR22A7H-1111B	
AF97-56		←	2NO + 2NC × 4	AR22A2H-2222B	AR22A7H-2222B	

· Operating direction

- Directions other than those shown in the table
- Directions other than those shown in the table above can be provided.
 For types AR22A□N-[1] ② ③ ④ B, designate the contact arrangement codes for the necessary operating directions ([1]: Upper, [2]: Right, ③: Lower, ④: Left). Designate "0" for uppercessory directions. unnecessary directions.



· Contact arrangement

Contact arrangement		-	1NO	1NC	1NO+1NC	2NO	2NC	2NO+2NC
Manual return Spring return	Screw	0	Α	В	1	D	Е	_
	Solder/Tab	0	_	_	1	_	_	2

[•] Spring/manual return are also available, contact FUJI.



■ Buzzers

Sound	Description	Transformer	Operating voltage	Туре
Electronic sound	LED operation indicator (Red)	Without	6V AC	DR22B5-AB
	Intermittent/continuous sound		6V DC	DR22B5-6B
	selection		12 to 24V AC/DC	DR22B5-EB
4	• Sound level: 90dB (0.1m) 70dB (1m)		35 to 48V AC/DC	DR22B5-FB
	70dB (1111)	With	100 to 110V AC	DR22B5-HB
(3)			200 to 220V AC	DR22B5-MB
AF96-377		With resistor unit	100 to 110V DC	DR22B5-1B
Magnetic sound	Sound volume adjustment Sound level: 80 to 90dB (0.1m) 60 to 70dB (1m)	Without	24V AC/DC	DR22B3-EB
. W. i.		With	100 to 110V AC	DR22B3-HB
AF96-376			200 to 220V AC	DR22B3-MB
Electronic sound (IP54)	Intermittent/continuous sound	Without	6V AC	DR22B8-AB
	selection		6V DC	DR22B8-6B
400	Sound level: 80dB (0.1m)		12 to 24V AC/DC	DR22B8-EB
4 7	60dB (1m)		35 to 48V AC/DC	DR22B8-FB
300 1		With	100 to 110V AC	DR22B8-HB
(B)			200 to 220V AC	DR22B8-MB
AF96-244		With resistor unit	100 to 110V DC	DR22B8-1B

Notes: • Intermittent/continuous sound selection (DR22B5, B8) See the "Short-circuit terminal" in the dimensions diagram on the 49 page, and select as follows:
• Short-circuit terminal mounted → Intermittent sound

- Short-circuit terminal not mounted → Continuous sound
- · Sound volume adjustment (DR22B3) Use a flat-bladed screwdriver with a narrow tip to gently turn "Control knob" shown in the dimensions diagram on the 49 page, as follows.

 Clockwise → Increase sound pressure

 Counterclockwise → Decrease sound pressure





AR22 and DR22 **Dimensions**


■ Dimensions, mm


·Illuminated pushbutton switches

Flush/Extended




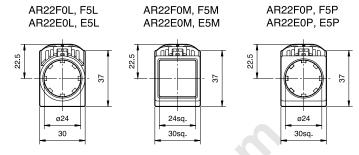





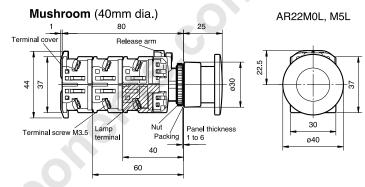



ø29
















■ Dimensions, mm


·Pushbutton switches

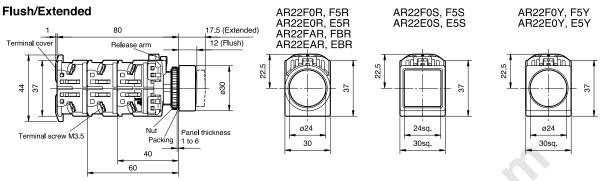


Mushroom (40mm dia.)





Flush/Extended with full guard




Mushroom (29mm dia.)









Extended with half guard





Mushroom with full guard (40mm dia.)




Pushbutton with selector ring













AR22 and DR22 Dimensions

■ Dimensions, mm


·Emergency stop pushbutton switches

Push-lock, turn-reset (40mm dia.)







Push-lock, turn-reset (29mm dia.)

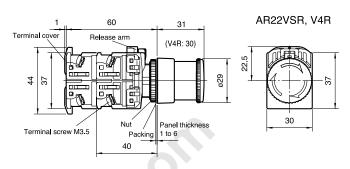


Key release push-lock, turn-reset (40mm dia.)




Push-lock, pull-reset (35mm dia.)





Unibody push-lock, turn-reset (40mm dia.)

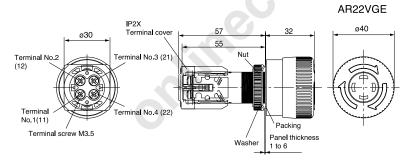


Wiring diagrams

Note: Terminal No. shown in () are for contact arrangement 2NC.


■ Dimensions, mm

·Emergency stop illuminated pushbutton switches

Push-lock, turn-reset (40mm dia.)




AR22V0L, V2L AR22VDL, VAL 30 ø40




Note: *1 230V and over *2 AR22V2L and VAL types only

Push-lock, turn-reset (29mm dia.)











Unibody push-lock, turn-reset (40mm dia.)

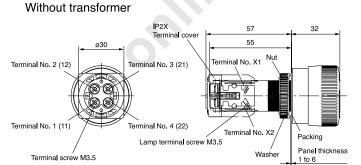



AR22VGF




Note: Terminal No. shown in () are for contact arrangement 2NC.


AR22 and DR22 Dimensions


■ Dimensions, mm

·Selector switches


Knob









Lever










Cylindrical knob









Key








AR22 and DR22 Dimensions

■ Dimensions, mm


·Illuminated selector switches

With transformer




Note: * 230V and over

AR22PL





Without transformer





·Pilot lights

Dome










Short body/with transformer DR22D0L Terminal cover M3.5 Packing Packing Packing Packing Nut Panel thickness 1 to 6



Note: * Except for the types 110V AC, 127V AC and 220V AC.



AR22 and DR22 **Dimensions**

■ Dimensions, mm

·Pilot lights


Extended

With transformer, with resistor unit


DR22E3L DR22E3M DR22E3P 60 12 ø30 30sq. 30sq. 64 ø24 24sq ø24 Terminal cover Lamp (BA9S) Legend plate: E3L, E3P ø19.7 thickness 1 to 6 E3M 20sq. Terminal screw M3.5


Without transformer


Short body/without transformer



Short body/with transformer









Note: * Except for the types 110V AC, 127V AC and 220V AC.

Faceted






Without transformer




Short body/with transformer



DR22K0L

Note: * Except for the types 110V AC, 127V AC and 220V AC.


Short body/without transformer




■ Dimensions, mm

·Pilot lights


Flush





Short body/with transformer


DR22F3M, F4M



Note: * Except for the types 110V AC, 127V AC and 220V AC.

Short body/without transformer


DR22F3M, F4M




Flush (12mm high frame)

With transformer, with resistor unit

DR22F5M




Without transformer DR22F5M



Short body/with transformer


DR22F5M



Note: * Except for the types 110V AC, 127V AC and 220V AC.

Short body/without transformer

DR22F5M





AR22 and DR22 Dimensions


■ Dimensions, mm

·Pilot lights


Flush rectangular








Note: * Except for the types 110V AC, 127V AC and 220V AC.




·Joy stick selector switches


Ball type without lock

Screw terminal AR22A0N, A5N





Solder/tab terminal AR22A0H, A5H




Notes * The contact arrangement is operable in the designated direction by pulling the lock piece in the central position with the fingers. The lock piece will return automatically and locks when the lock piece is released in the central position.


The lock piece locks in the central position only.

Ball type with lock

Screw terminal AR22A1N, A6N



Solder/tab terminal AR22A1H, A6H





■ Dimensions, mm

·Joy stick selector switches


Rubber cap type without lock

Screw terminal AR22A2N, A7N







Solder/tab terminal AR22A2H, A7H

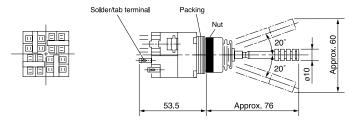


Buzzers


Electronic sound






DR22B5








DR22B5

Magnetic sound











Electronic sound (IP54)






AR22 and DR22 Notes on use

Notes on use

■ Fit two sizes of panel cutout holes

* The unique nut with a step allows switch to be mounted in either 22.3mm- or 25.5mm-dia. holes as shown in Fig. 1 without any extra adapter.

Fig. 1 Panel cutout




Note: * If key-washer or legend plate are not used, 3.2mm-wide location holes need not be cutout.

■ Detaching contact block from the operator

While keeping the white release arm pressed with one finger, pull-out the contact block in the direction by the arrow.

Fig. 2 Detaching contact block from the operator




■ Mounting operator to panel

① In a 22.3mm-dia. panel cutout hole

Insert the operator into the cutout hole from the panel front as shown in the Fig. 3.

Then, fit section "A" of the AR9A004 wrench from behind the panel and secure the operator with nut. (See page 106 for the wrench)


Fig. 3 Mounting an operator in a 22.3mm-dia. hole



Note: Recommended tightening torque is from 1 to 1.5N·m


② In a 25.5mm-dia. panel cutout hole As shown in Fig. 4, with the nut step-out side oriented to the panel, use the wrench to tighten the nut and secure the operator.

Fig. 4 Mounting a operator in a 25.5mm-dia. hole




Note: 1. Recommended tightening torque is from 1 to 1.5N·m

Ensure that the step-out portion of the nut is correctly fitted in the cutout hole.



For easier mounting in the 25.5mm-dia. hole, the AR9Y718 adapter is also available separately.


Fig. 5 Mounting with an adapter and locking nut



■ Mounting contact block to the operator

As shown in Fig. 6, align the protruding part of the contact block release arm with the operator groove at the ∇ mark. Then, insert the contact block into the operator until it clicks.

Fig. 6 Mounting the contact block to the operator






AR22 and DR22 Notes on use

■ VG type panel mounting

As shown in the illustration, remove the live section cover, nut, and washer, and insert the main unit into a panel which has been cut from the front side of the panel. Place the type number AR22 facing upward, and secure the main unit with the nut using a wrench AHX701. The appropriate tightening torque is 1 to 1.5N•m.




■ Joy stick selector switch mounting on panel

- (1) Twist and remove the ball from the operator.
- (2) Loosen the nut and remove the switch if the switch is provided with a lock.
- (3) If no locking nut is provided, loosen the nut and remove the switch after the packing part (A) shown in the illustration is stretched to the lever groove.
- (4) Mount the switch in the order opposite to removal. Set the packing to the notch on the lever as a reference. Do not separate the nut from the packing.
- (5) Use a torque wrench AR9A006 to tighten the nut from the front of the panel.

Note: Recommended tightening a torque is 1 to 1.5N·m.

Fig. 8



■ Buzzer mounting on panel

- (1) Remove the nut, and insert the main unit into the mounting hole from the back of the panel.
- (2) Tighten the buzzer using a wrench AR9A006 from the front side of the panel.

 Note:
 - · Recommended tightening torque is 1 to 1.5N·m.
 - Electronic sound (IP54) type has a all-in-one unit with nut and cap.

■ Applicable panel thickness

The AR22/DR22 series switches are mountable to panels with thickness as given in Table below.

Mounting condition			Applicable panel thickness (mm)	
Without acc	essories	1 to 6		
With accesories	Protective cove cap, legend pla		1 to 4	
	Key washer	without hole	1 to 4	
		with hole	1 to 5	
	Adapter for a 2	5.5mm-dia. hole	1 to 5.5	


• When using a joy stick selector switch and buzzer The applicable panel thickness is 1 to 6mm. Five 1.3mm packings (single-piece type) are included as standard equipment. Insert as many as required depending on the panel thickness, using the following table as a guide. When using a key washer, legend plate, or adapter, their thickness will have to be added to the values in the guide.

Panel thickness (mm)	Number of packings
(plus key washer, legend plate)	(reference)
1.0 to 1.6	5
1.6 to 2.8	4
2.8 to 3.8	3
3.8 to 4.8	2
4.8 to 6.0	1

AR22 and DR22 Notes on use

■ Minimum mounting space, mm

(1) Minimum mounting space



AR22M0□, M5□, V5□, V0□, V2□, V7R, VG□: 42mm Notes: AR22M3R, M8R: 49mm AR22Q2R, WR, W0R, WY, WCY: 40mm

- When mounting contact blocks at 30mm pitch, use it circuit of 380V
- Short body with transformer types: 50mm.
- Rectangular types: 36.5mm (except for short body without transformer types).
- Short body without transformer types: 60mm.
- Rectangular short body without transformer types: 60mm.
- This dimension applies when transformer units or contact blocks face each other.
- This dimension applies when transformer unit or contact block is mounted on only one side


When mounting operators on a panel, orient all ∇ marks on the operator upwards.

(The operator release arms are oriented upwards.) This aligns the terminals of all contact blocks, thus making wiring easy.

(2) Detaching contact blocks from operators

As shown in Fig. 9, insert a flat-head screw driver into the groove of the white release arm on the contact block. Then, while inserting the driver in hole A of the operator base, lower the driver grip and take out the contact block.

Fig. 11




Note: Use a flat head screwdriver as shown at the right.



■ Products with blue and green LEDs

The LED devices on products with high-brightness (blue and green) LEDs are very sensitive to static electricity. When replacing LED lamps do not allow static electricity to come into direct contact with the metal frame on the upper side of the LED lamp. The LED device may be damaged if this part is subjected to static electricity. When installing or removing an LED lamp, it is recommended that you use the lamp changer (AHX790).






■ Wiring


(1) The terminal screws are M3.5 pan head screws. Solid wires, stranded wires, or crimp terminals can be connected.

Fig. 13



(2) Two crimp terminals can be used by putting one of them on top of the other. If fork-type crimp terminals are used in the horizontal direction, however, use ones as shown in the figure below. (i.e., Toei Tanshi's F2-3.5S or an equivalent).

Fig. 14



- (3) The terminal washers are a self-lifting type.
- (4) Tighten the terminal screws to a tightening torque of 0.8 to 1N·m.
- (5) Keep the terminals free of external force while wiring or after wiring, or operational failures may result.
- Do not use screws other than the provided terminal screws. Notes:
 - If solid wires are connected to the lamp terminals in the horizontal direction (on the side), be sure to insert the solid wires into the square washers.

 - Terminal layout., see page 54
 See page 53 for the wiring of the joy stick selector switch and VG type.

■ LED Indicator


(1) LED Lamp Malfunctioning

The LED lamp is lit by a very small level of current (approximately 0.01mA). Therefore, it may be erroneously lit by a leaking current from the surge absorption circuit or semiconductor circuit or due to stray capacitance between cables. In that case, provide a countermeasure (e.g., connect a resistor in parallel with the LED lamp).

· Countermeasure for Malfunctioning

The LED lamp malfunctions can be prevented by connecting a shunt resistor (R) or CR elements (a capacitor and resistor) in parallel with the LED lamp terminal. The resistance and CR values vary depending on the model and the operating conditions.

Fig. 15



(2) Incoming surge

High luminance LED products use an element sensitive to static electricity. They may not be lit by an abnormal voltage like surge. Please note it.




AR22 and DR22 Notes on use

■ Joy stick selector switch

- Screw terminal wiring
- (1) The terminals use M3.5 pan head screws. Use crimp terminals to wire the terminals.

Fig. 16



- (2) The terminal washers are a self-lifting type.
- (3) Tighten the terminal screws to a tightening torque of 0.8 to 1.0N•m. Keep the terminals free of external force during and after wiring, or operational failures may result.
- · Solder (tab terminal) wiring
- Pay attention to the following items when soldering the terminals.

Use a soldering iron with a power consumption of 30W. Use resin-core solder.

If a 30W soldering iron is used, finish soldering the terminals within five seconds. If a 20W soldering iron is used, finish soldering the terminals within 10 seconds. Make sure that the soldering iron tip length is at least 20mm long. Do not apply external force to the terminals. Because lead-free solder's melting point is slightly high, soldering work may be difficult. Use a soldering iron whose tip is rather large or whose calorie is rather high.

- (2) When using adjacent terminals, use insulation tubes to prevent the terminals from short-circuiting. Utmost attention must be paid to the solder terminals if especially thick wires are used or if a large quantity of solder is used.
- (3) Connectable wires
 Solid wire: 2 wires, 0.8mm dia. max.
 Stranded wire: 1 wire, 0.75mm² max.
- (4) Use the 110 (2.8mm) series receptacle for the tab terminals.
- (5) Wire the tab terminals with the contact unit connected to the main unit.

Operation

Operation shall be made after the joy stick operation lever is surely returned to the center position. Do not apply excessive force to the operation lever. The maximum permissible force is 100N.

Use of contact blocks

If NO and NC contacts are used in the same contact block, check that there is no difference in potential. Do not connect different type of power source different in type.

■ Buzzer

Noise

If the application circuit is likely to generate excessively strong noise, connect a surge absorber (e.g., FUJI's ENC390D, provided that the switch is a 24V type) in parallel with the buzzer.

Place of Use


The buzzer does not have a drip-proof construction. Do not use the buzzer in places where oil or water is sprayed or where dust accumulates. If the buzzer is a splash-proof type, it will resist sprays of water.

- Do not use the buzzer in places that are subject to an excessive amount of corrosive gas.
- Note that the buzzer is likely to sound erroneously due to leakage current or the like.

■ AR22VG type

- As shown in Fig. 17 (a), engage the tip of the wrench (AHX8003) with the groove in the center to mount or remove the locking unit. The recommended tightening torque is 0.6 to 1N•m.
- As shown in Fig. 17 (b), insert the lamp changer (AHX790) and press the lamp changer to mount or remove the lamp.
 Turn the lamp changer clockwise when mounting the lamp and counterclockwise when removing it.


Fig. 17



Note: The lamp and neon lamp are special models for the AR22VGF. Use only these special lamps for replacement.


Wiring

The terminals use M3.5 pan head screws. Use crimp terminals for wiring and cover the crimp terminals with insulation tubes.




- The terminal washers are a self-lifting type.
- Tighten the terminal screws to a torque of 0.8 to 1N•m. Keep the terminals free of external force during and after wiring, or operational failures may result.
- Wiring precautions
- (1) Use of round-type crimp terminal
- Remove the live section cover, and half-tighten to the point parallel with the terminal rib white marks in the direction of the arrows as shown in the illustration below.
- Mount the live section cover and tighten the terminals securely.

Fig. 19



As shown in the illustration below, mount the live section cover so that the mounting legs of the cover engage with the concave parts of the main unit.

Fig. 20



(2) If fork-type crimp terminals are used, wiring will be possible without removing the live section cover.

AR22 and DR22 Notes on use

■ Operation

- Do not use a hitting or bouncing action to operate the button, or the switch may break. Always operate the switch by hand.
 Do not pull mushroom head pushbuttons or alternate buttons other than the Q2.
- Do not rotate the selector ring type while the button is pressed, or the mechanism may break.
- The control type incorporates make-before-break contacts. Prepare a protection circuit for the application.
- The dial of the selector switch rotates with a light force. Do not apply force in excess of 1N·m. Please do not pull out or insert the key forcibly.
- To release the lock of the push-lock type, rotate the button clockwise as shown by the arrow. Do not pull the button, or the latch may break and the lock may fail to work.
- Do not lock the emergency stop pushbutton switch and emergency stop illuminated pushbutton switch in use. Push and lock the switch in case of an emergency only.

1-2

(NC)

(NO)

Terminal No. 1-2, 3-4


(NC)

(NO)

Terminal No. 1-2, 3-4

■ Terminal layout

Fig. 21

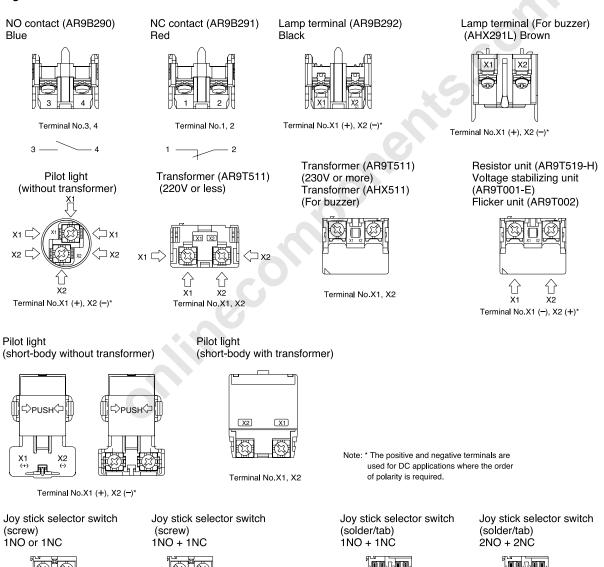

1-2 (NC)

3-4 (NO)

Terminal No. 1-2 or 3-4

3-4 (NO)

1-2 (NC)

Terminal No. 1-2, 3-4



AR30 and DR30 General information

The full range of the contact blocks and transformer units suitable for the AR22 and DR22 series may also be fitted to the AR30 and DR30 series.

■ Features

Quick-replacement contact blocks and transformer units


The snap-on construction makes replacement and addition of contact blocks and transformer units very simple and straightforward.

Oil-and dust-proof operator module construction

The protection level of the AR30/DR30 operator modules conforms to IEC Standard IP65. The special seals protect the operator modules and switch mechanisms against oil, dust, and grime, thus ensuring high performance in dusty and moist environments.

Miniaturization


- Selector switches with 1NO+1NC: 41mm deep
 Pilot lights: 34mm deep
- The transformer now occupies far less space.





Self-cleaning contacts

All the contacts are double break type and feature self-cleaning action. Every time the switch is operated, the contact surfaces are wiped with a sliding movement, thus ensuring high contact reliability even at low voltage and small current levels (5V, 5mA).



Metal nut

Safer model with metal nut is also available



Wiring

- · Wiring from two directions is possible.
- Wiring in both vertical and lateral directions facilitates wiring in narrow spaces.
- Color coding of contact blocks makes wiring easy.
 1NO: Blue, 1NC: Red Lamp terminal and transformer unit: Black

Safety

- A terminal cover is provided, assuring safety and security.
- FUJI's original Trigger Action mechanism is used in the emergency stop pushbuttons. They are suitable for emergency stop and safety. This mechanism prevents the contacts from moving until the button is pushed and locked.

Protection

- Excellent oil-tight construction (IP65) of the operator.
- Closure of the contact block has been improved.

■ Approvals





AR30 and DR30 Quick reference guide

■ Illuminated pushbutton switches

Operator	Туре	Operator	Туре	Operator	Туре
Extended round head	AR30E0L, E5L	Extended with full guard (24mm dia. with openings)	AR30G2L, G7L	Push-lock, turn-reset (40mm dia. with white arrow)	AR30V5L
(((((((((((((((((((AF95-4	④ ⑤ ♠ (€ ((((((((((((((((((((((((((((((((AF99-328	ⓑ ♣ (€ ((((((((((AF97-75
Extended with transparent full guard (24mm dia.)	AR30G4L, G9L	Extended with full guard (24mm dia.)	AR30G3L, G8L	Push-pull	AR30Q7L
Ŋ £ (€ (((((((((((((((((((KKD05-164	((((((((((AF95-6	® 6 €€€	AF96-185

■ Pushbutton switches

Operator	Type	Operator	Type	Operator	Type
Flush round head	AR30F0R, F5R	Mushroom head (29mm dia.)	AR30M4R	Mushroom head with full guard (35mm dia. metal nut)	AR30GSR
⊕ ⊕ (€ ((((((((((((((((((((((((((((((((((AF95-11	④ ⑤ ≜(€@	AF95-8	④ ⑤ ≜(€@	AF96-239
Extended round head	AR30E0R, E5R	Extended with full guard (24mm dia.)	AR30G1R, G6R	Giant head	AR30B0R
() (((((((()))	AF95-10	ⓑ ⓑ △ (ⓒ	AF95-16	₽ 4 (€ ©	AF95-579
Flush round head Symbol mark type	AR30FAR, FBR	Extended with half guard	AR30G0R, G5R	Giant head with guard	AR30B1R
	AF98-195	♠ <u>≜</u> (€@	AF95-9	(h) (f)	AF95-582
Extended round head Symbol mark type	AR30EAR, EBR	Pin lock	AR30GPR	Giant head with full guard	AR30B2R
(11)	AF98-194	(4) (6) (4) (6)	AF96-240	④ ⑤ ≜(€ ◎	AF95-580
Mushroom head (40mm dia.)	AR30M0R, M5R	Mushroom head with full guard (40mm dia.)	AR30M3R, M8R	Giant head with full guard	AR30B3R
④ ● △ (€ ((((((((((AF95-12	(€ (€ (((()	AF95-17	((((((((((AF95-581

Note: AR30M8R: Not approved standard



AR30 and DR30 Quick reference guide

■ Pushbutton switches

Operator	Туре	Operator	Туре	Operator	Туре
Pushbutton with selector ring (2-position)	AR30S1R, S2R, S3R, S6R	Push-lock, turn-reset (40mm dia. with white arrow)	AR30V5R	Pushbutton with emergency operating cap	AR30FVR
④ ⑤ ♠(€@	AF97-506	() () <u>(</u> ((((((((((((((((((AF97-69	ⓑ ⓒ ♠(€	AF96-187
Push, turn-lock	AR30N0R			OIL	
④ ⑤ ♠(€	AF95-583				

■ Emergency stop pushbutton switches (conform to EN418)

Operator	Туре	Operator	Type	Operator	Туре
Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	AR30V0R	Push-lock, turn-reset (65mm dia.with white arrow)	AR30V1R	Push-lock, pull-reset (35mm dia.)	AR30Q2R
(4) (4) (4) (4) (4) (4) (4) (4)	AF97-69	(4) (1) (1) (1) (1) (1) (1) (1)	AF97-68	(((((((((((((((((((AF95-3
Push-lock, turn-reset (40mm dia.)	AR30V2R	0			
See page 04/79, 04/101	0				
(((((((((((((((((((AF95-176				

Notes: Provided with the (Direct opening action)

■ Emergency stop illuminated pushbutton switches (conform to EN418)

Operator	Туре	Operator	Type
Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	AR30V0L	Push-lock, turn-reset (40mm dia.)	AR30V2L
ⓑ ⓒ ♠(€@	AF97-75	ⓑ ⓑ ⓒ (€(((((((((((((((((((((((((((((((((((AF95-2

Note: Provided with the (Direct opening action)

AR30 and DR30 Quick reference guide

■ Selector switches

Operator	Туре	Operator	Type	Operator	Туре
Knob	AR30PR, PCR	Key	AR30JR, JCR	Key (Long durability)	AR30JAR
④ ⑤ ≜ (€ ◎	AF95-13	₽ 4 (€@	AF95-15	() ((((((((((((((((((AF95-15
Lever	AR30WR, WCR				
♠ ♣ (€ (AF95-14			COLU	

■ Illuminated selector switches

Operator	Туре
Knob	AR30PL
④ ⑤ ≜(€ ◎	AF95-5

■ Pilot lights

Lens	Туре	Lens	Туре	Lens	Туре
Dome	DR30D0L	Dome with dimmer control	DR30D1L	Flush square (40mm sq. transparent lens)	DR30M4M *
♠ ♠ (€ ((((((((((((((((((((((((((((((((((AF95-18	(4) (6) (4) (6)	AF02-63	() (((((((((((((((((((((((((((((((((AF97-63
Extended round	DR30E3L	Flush square (34mm sq. transparent lens)	DR30F4M *		
(4) (1) (1) (1) (1) (1) (1) (1)	AF95-20	④ 	AF97-65		
Faceted	DR30K0L	Flush rectangular (Transparent lens)	DR30F4N *		
♠ ⑤	AF95-19	() (€ ((((((((((((((((((((((((((((((((AF97-64		

Note: With resistor unit and resistor types: Not approved standard * LED 12V AC type: Not approved standard



Pushbuttons/Selectors/Pilot Lights/Buzzers AR30 and DR30

AR30 and DR30 Quick reference guide

■ Joy stick selector switches

Handle	Туре	Handle	Туре	Handle	Type
Ball type	AR30A0, A5	Ball type with lock	AR30A1, A6	Rubber cap type	AR30A2, A7
71 (AF97-48	9 2 ⊕ . ≙(€	AF97-44	N	AF97-57

■ Buzzers

Sound	Туре	Sound	Туре	Sound	Туре
Electronic sound	DR30B5*	Magnetic sound	DR30B0	Electronic sound (IP54)	DR30B8 *
④ ⑤	AF96-381		AF96-378	④ ⑤ △(€	AF96-245
Electronic sound (economy)	DR30B6		O _U		
(h) (f) ∘	KK02-17				

Note: * 6V AC, 110V DC types: Not approved standard

■ Numerical indicators

Display	Туре	Display	Туре
One-digit	DR30N1	Two-digit	DR30N2
Disco	ntialle	Disco	ntinue
	KK02-55B		KK02-56B



AR30 and DR30 Part number system

Illuminated pushbuttons

AR30 E0L - 10 E3 R □ 3 4 5 (1) 2

Product category

AR30: 30mm-dia. illuminated pushbutton

30mm-dia. emergency stop illuminated pushbutton

② Operator

Illuminated pushbutton

E0L: Extended round head

E5L: Extended round head (Alternate)

G4L: Extended with transparent full guard (24mm dia.)

G9L: Extended with transparent full guard (24mm dia. alternate)

G2L: Extended with full guard (24mm dia. with openings)

G7L: Extended with full guard (24mm dia. with openings, alternate)

G3L: Extended with full guard (24mm dia.)

G8L: Extended with full guard (24mm dia. alternate)

V5L: Push-lock, turn-reset (40mm dia. with white arrow) *1

Q7L: Push-pull

• Emergency stop illuminated pushbutton

V0L: Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)

Himecon

V2L: Push-lock, turn-reset (40mm dia.)

3 Contact arrangement

30: 3NO 10: 1NO 01: 1NC 03: 3NC 11: 1NO+1NC 33: 3NO+3NC 20: 2NO 40: 4NO 02: 2NC 04: 4NC 22: 2NO+2NC 50: 5NO 05: 5NC

4 Lamp voltage

·Incandescent lamp

54: 5.5V AC/DC, without transformer C4: 15V AC/DC, without transformer D4: 20V AC/DC, without transformer E4: 24V AC/DC, without transformer H4: 100-110V AC, with transformer L4: 115-127V AC, with transformer M4: 200-220V AC, with transformer

Q4: 230-254V AC, with transformer S4: 350-380V AC, with transformer T4: 400-440V AC, with transformer

V4: 480V AC, with transformer

W4: 500-550V AC, with transformer ·LED lamp

A3: 6V AC, without transformer

63: 6V DC, without transformer

B3: 12V AC/DC, without transformer

C3: 15V AC/DC, without transformer

E3: 24V AC/DC, without transformer

H3: 100-110V AC, with transformer L3: 115-127V AC, with transformer M3: 200-220V AC, with transformer

Q3: 230-254V AC, with transformer S3: 350-380V AC, with transformer T3: 400-440V AC, with transformer

V3: 480V AC, with transformer

W3: 500-550V AC, with transformer

⑤ Color of lens

G: Green Y: Yellow R: Red *2 A: Orange W: White S: Blue

6 Special product

Resisting water-soluble cutting oils and heat

With a contact protection cover

Z4: Resisting sulfuration gas

ZB: Meeting IP2X finger-protection standards

ZM: Metal nut

Notes: *1 Products with no trigger action mechanism. These products cannot be used as emergency stop switches that comply with EN standards.

*2 Button color of emergency stop illuminated switches are Red only.

• The manufacturing range varies depending on the model. For details, refer to the contents of this catalog.



Pushbuttons/Selectors/Pilot Lights/Buzzers AR30 and DR30 Part number system

Pushbuttons

AR30 E0R - 10 R □ □ 2 3 4 5 6

Product category

AR30: 30mm-dia. pushbutton

30mm-dia. emergency stop pushbutton

② Operator

Pushbutton switch

F0R: Flush round head

F5R: Flush round head (Alternate)

E0R: Extended round head

E5R: Extended round head (Alternate)

FAR: Flush round head (Symbol mark type)

FBR: Flush round head (Symbol mark type, alternate)

EAR: Extended round head (Symbol mark type)

EBR: Extended round head (Symbol mark type, alternate)

M0R: Mushroom head (40mm dia.)

M5R: Mushroom head (40mm dia. Alternate)

M4R: Mushroom head (29mm dia.)

G1R: Extended with full guard (24mm dia.)

G6R: Extended with full guard (24mm dia. Alternate)

GPR:Pin lock

G0R: Extended with half guard

G5R: Extended with half guard (Alternate)

M3R:Mushroom head with full guard (40mm dia.)

M8R:Mushroom head with full guard (40mm dia. Alternate)

GSR:Mushroom head with full guard (35mm dia. metal nut)

B0R: Giant head

B1R: Giant head with guard

B2R: Giant head with full guard

B3R: Giant head with full guard

S1R: Pushbutton with selector ring (2-position)

S2R: Pushbutton with selector ring (2-position)

S3R: Pushbutton with selector ring (2-position)

S6R: Pushbutton with selector ring (2-position)

N0R: Push. turn-lock

V5R: Push-lock, turn-reset (40mm dia. with white arrow) *1

FVR: Pushbutton with emergency operating cap

·Emergency stop pushbutton switch

VOR: Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)

V2R: Push-lock, turn-reset (40mm dia.)

V1R: Push-lock, turn-reset (Soft-touch 65mm dia. with white arrow)

Q2R: Push-lock, pull-reset (35mm dia.)

3 Contact arrangement

30: 3NO 10: 1NO 01: 1NC 03: 3NC 11: 1NO+1NC 33: 3NO+3NC 20: 2NO 40: 4NO 02: 2NC 04: 4NC 22: 2NO+2NC 44: 4NO+4NC 50: 5NO

05: 5NC

4 Color of button

G: Green Y: Yellow R: Red*2 Orange Blue B: Black S: W: White Clear

(For AR30FAR, FBR, Green, Red, Black (For AR30F0R) EAR, EBR)

Symbol mark (For AR30FAR, FBR, EAR, EBR)

Symbol mark	0		I		T		\circ	I	\bigcirc
Color of button	White	Black	White	Black	White	Black	Clear		
Color of mark	Red		Green	-	Green		Black		
Code	01	02	03	04	11	12	02B	04B	12B

6 Special product

Z9: Resisting water-soluble cutting oils and heat

Z8: With a contact protection cover

Z4: Resisting sulfuration gas

onenies.com

ZB: Meeting IP2X finger-protection standards

ZM: Metal nut

Notes: *1 Products with no trigger action mechanism. These products cannot be used as emergency stop switches that comply with EN standards.

*2Button color of emergency stop switches are Red only.

· The manufacturing range varies depending on the model. For details, refer to the contents of this catalog.



AR30 and DR30 Part number system

Selector and illuminated selector switches

AR30 PL-2 □ 10 E3 G □ □ 3 4 5 6 7 8 9 (1) (2)

① Product category

AR30: 30mm dia. selector switch and illuminated selector switch

2 Operator

 Selector switch PR: Knob

PCR: Knob operated control type WR: Lever

WCR: Lever operated control type

JR: Key

JCR: Key operated control type JAR: Key (Long durability) •Illuminated selector switch

PL: Knob

③ Operation

2-position, maintained 2-position, spring return 0:

3: 3-position, maintained

3-position, spring/manual return (Left to center) 6: 3-position, spring/manual return (Right to center) 7:

3-position, spring return 1:

4-position, maintained (For AR30PCR, WCR) 4. 5: 5-position, maintained (For AR30PCR, WCR)

4 Key removable position

A: Left

Left and right B:

C: Left, right and center

D: Right

E: Center

F: Right and center

Left and center

5 Contact arrangement

10: 1NO 30: 3NO 01: 1NC 03: 3NC 11: 1NO+1NC 33: 3NO+3NC 20: 2NO 4NO 40: 02: 2NC 04: 4NC 22: 2NO+2NC 44: 4NO+4NC 50: 5NO 05: 5NC

Note: Control type: See page 04/85 to 04/87

6 Lamp voltage

Incandescent lamp

54: 5.5V AC/DC, without transformer C4: 15V AC/DC, without transformer D4: 20V AC/DC, without transformer E4: 24V AC/DC, without transformer H4: 100-110V AC, with transformer L4: 115-127V AC, with transformer M4: 200-220V AC, with transformer Q4: 230-254V AC, with transformer S4: 350-380V AC, with transformer T4: 400-440V AC, with transformer V4: 480V AC, with transformer W4: 500-550V AC, with transformer LED lamp

A3: 6V AC, without transformer

63: 6V DC, without transformer B3: 12V AC/DC, without transformer C3: 15V AC/DC, without transformer E3: 24V AC/DC, without transformer

H3: 100-110V AC, with transformer
L3: 115-127V AC, with transformer
M3: 200-220V AC, with transformer
Q3: 230-254V AC, with transformer

S3: 350-380V AC, with transformer T3: 400-440V AC, with transformer

V3: 480V AC, with transformer

W3: 500-550V AC, with transformer

⑦ Color of knob

Black (Not available for illuminated selector switch) B:

G: Green

R: Red

White (Not available for selector switch) W:

Yellow (Not available for selector switch)

Orange (Not available for selector switch)

Blue (Not available for selector switch)

8 Key type No.

A, B, C, D, E or F ("A" is standard)

9 Special product

Z9: Resisting water-soluble cutting oils and heat

Z8: With a contact protection cover

Z4: Resisting sulfuration gas

ZB: Meeting IP2X finger-protection standards

ZM: Metal nut

Note: • The manufacturing range varies depending on the model. For details, refer to the contents of this catalog.



Pushbuttons/Selectors/Pilot Lights/Buzzers AR30 and DR30 Part number system

Pilot lights

DR30 D0L - E3 W □ 1 2 3 4 5

Product category

DR30: 30mm dia. pilot light

2 Lens

D0L: Dome

E3L: Extended round

K0L: Faceted

D1L: Dome with dimmer control

F4M: Flush square (34mm sq. transparent lens) F4N: Flush rectangular (Transparent lens) M4M: Flush square (40mm sq. transparent lens)

3 Lamp voltage

·Incandescent lamp

54: 5.5V AC/DC, without transformer H8: 100-110V AC, short-body with transformer C4: 15V AC/DC, without transformer L8: 115-127V AC, short-body with transformer D4: 20V AC/DC, without transformer M8: 200-220V AC, short-body with transformer E4: 24V AC/DC, without transformer

L4: 115-127V AC, with transformer M4: 200-220V AC, with transformer Q4: 230-254V AC, with transformer S4: 350-380V AC, with transformer T4: 400-440V AC, with transformer

H4: 100-110V AC, with transformer

V4: 480V AC, with transformer

W4: 500-550V AC, with transformer

FQ: 50V DC, with resistor' HQ: 110V DC, with resistor* MQ: 220V DC, with resistor*

·LED lamp

A3: 6V AC, without transformer 63: 6V DC, without transformer

B3: 12V AC/DC, without transformer

C3: 15V AC/DC, without transformer E3: 24V AC/DC, without transformer

H3: 100-110V AC, with transformer

L3: 115-127V AC, with transformer M3: 200-220V AC, with transformer

Q3: 230-254V AC, with transformer

S3: 350-380V AC, with transformer T3: 400-440V AC, with transformer

V3: 480V AC, with transformer

W3: 500-550V AC, with transformer

H7: 110V DC, with resistor unit

FR: 50V DC, with resistor*

HR: 110V DC, with resistor*

MR: 220V DC, with resistor*

(For DR30F4M, F4N, M4M type)

65: 6V DC, without transformer

25: 12V AC. without transformer

B5: 12V AC/DC, without transformer

E5: 24V AC/DC, without transformer

H5: 100-110V AC, with transformer

L5: 115-127V AC, with transformer

M5: 200-220V AC, with transformer

Q5: 230-254V AC, with transformer S5: 350-380V AC, with transformer T5: 400-440V AC, with transformer

V5: 480V AC, with transformer

W5: 500-550V AC, with transformer HE: 110V DC, with resistor unit

Note: * DR30D0L, K0L type only

4 Color of lens or color plate

G: Green Y: Yellow R: Red A: Orange W: White S: Blue

Special product

Z9: Resisting water-soluble cutting oils and heat

Z4: Resisting sulfuration gas

ZB: Meeting IP2X finger-protection standards

ZM: Metal nut

H9: 100-110V AC, short-body with transformer

L9: 115-127V AC, short-body with transformer M9: 200-220V AC, short-body with transformer

Note: • The manufacturing range varies depending on the model. For details, refer to the contents of this catalog.



AR30 and DR30 Part number system

Joy stick selector switches

AR30A 0 N - A0A0 B

1 23 4 5

Product category

AR30A: 30mm-dia. Joy stick selector switch

2 Handle

- 0: Ball type (without lock, manual return)
- 1: Ball type with lock (manual return)
- 2: Rubber cap type (without lock, manual return)
- 5: Ball type (without lock, spring return)
- 6: Ball type with lock (spring return)
- 7: Rubber cap type (without lock, spring return)

3 Terminal

- N: Screw
- H: Solder/tab

④ Contact arrangement

Contac	ct arrangement	Blank	1NO	1NC	1NO+1NC	2NO	2NC	2NO+2NC
Code	Screw	0	Α	В	1	D	E	-
	Solder/tab	0	-	-	1	-	-	2

Operating direction code of contacts



Locked position Ex. AR30A0N-<u>A 0 A 0 B</u>
2 1: Upper 2: Right

- 3: Lower 4: L
- ⑤ Handle color
- B: Black

■ Ordering information

Specify the following:

- 1. Type number
 - For the CCC approved product, add the suffix (CCC) to the part number

Example: Pushbutton switch AR30F0R-11B(CCC)

Buzzers

DR30B 5 - **E B**



Product category

DR30B: 30mm-dia. buzzer

② Sound

- 5: Electronic sound
- 6: Electronic sound (economy)
- 0: Magnetic sound
- 8: Electronic sound (IP54)

3 Operating voltage

- A: 6V AC (Type "5", "8")
- 6: 6V DC (Type "5", "8")
- E: 12-24V AC/DC (Type "6": 24V DC)
- F: 35-48V AC/DC (Type "5", "8")
- G: 24V AC (Type "6")
- H: 100-110V AC
- M: 200-220V AC
- 1: 100-110V DC (Type "5", "8")

4 Color of head

B: Black



Pushbuttons/Selectors/Pilot Lights/Buzzers AR30 and DR30 **Ratings and specifications**

■ Standards approved

UL508	File No. E44592
CSA C22.2 No.14	File No. LR20479
TÜV: EN60947-5-1	Pushbutton, Illuminated pushbutton: R9551062
	Selector, Illuminated selector: R9551060
	Pilot lights: R9551061
	Joy stick selector switch: R2050803
	(Lever switch)
	Buzzer: J9950091
TÜV: EN60947-5-1	Emergency stop pushbutton
EN60947-5-5	Emergency stop illuminated pushbutton
	: R50028146

■ Specifications (Indoor use)

Description	Pushbutton switch Illuminated pushbutton switch Emergency stop pushbutton switch Emergency stop illuminated pushbutton switch Selector switch Illuminated selector switch	Joy stick selector (Lever switch)	Pilot light			
Rated insulation voltage	600V AC/DC *1	250V AC/DC	250V AC/DC *2			
Mechanical durability	See page 66	250,000 operations	_			
Electrical durability	500,000 operations at 220V AC 6A	100,000 operations	_			
	1 million operations at 220V AC 3A	at 220V AC 1A				
		(Res. load)				
Operating frequency	1200 operations/hour (On-load factor: 40	%)	_			
Dielectric strength	2500V AC, 1 minute *3	2000V AC, 1 minute *4	4			
Insulation resistance	100MΩ or more (500V DC megger)	100MΩ or more (500V D	0V DC megger)			
Rated impulse dielectric strength	6kV	-	6kV			
Conditional short-circuit current	1000A	1000A	_			
Short-circuit protective device	Fuse 15A	Fuse 1A	_			
Pollution degree	3		·			
Vibration	Resonance: 10 to 55Hz, double amplitude Constant: 16.7Hz, double amplitude 3mm					
Shock	Malfunction durability: 100m/s ² * ⁶		Mechanical durability: 500m/s ²			
	Mechanical durability: 500m/s ²					
Ambient temperature	-20 to +70°C	-5 to +70°C	-20 to +50°C			
(No condensation or no icing)						
Storage temperature	-40 to +80°C					
Humidity	45 to 85% RH (within -5 to +40°C)					
Degree of protection	IP65 * ⁷					

- Notes: *1 Illuminated type without transformer: 250V AC/DC

 *2 Pilot light with transformer: 600V AC

 *3 Illuminated type without transformer: 2000V AC, 1 minute

 *4 Pilot light with transformer: 2500V AC, 1 minute

 *5 Emergency stop type: 10 to 500Hz, double amplitude 0.7mm (acceleration 50m/s²), according to the test condition of EN60947-5-5 (1998)

 *6 Emergency stop type: 150m/s²

 *7 AR30Q7L and DR30D1L type: IP40

AR30 and DR30 **Ratings and specifications**

Mechanical durability

Description		Operations
Pushbutton switch Illuminated pushbutton switch Emergency stop pusubutton switch Emergency stop illuminated pusubutton	Momentary action Alternate action With selector ring Push-lock, turn-reset Push-lock, pull-reset	5 million 1 million 100,000 100,000 30.000
Selector switch	Maintained 1, 2, 3, 4-contact Maintained 5, 6, 7, 8-contact Control type, spring return, spring/manual return	1 million 500,000 200,000
Illuminated selector switch	Maintained Without transformer 1, 2, 3-contact 4-contact 1, 2-contact 3-contact	1 million 500,000 1 million 500,000
	Spring return, spring/manual return	200,000

Note: Key insertion/removal durability for selector switch key types

• Key type 10,000

Key (Long durability) type 20,000

Buzzers

Item	DR30B5	DR30B6	DR30B0	DR30B8		
Rated insulation voltage	Without transformer: 60			БПООВО		
Sound level	90dB (0.1m) 70dB (1m)	VIVIOLDE VIIII II III	50111161. 2007 / to	80dB (0.1m) 60dB (1.0m)		
Durability	1000h		80h	1000h		
Frequency	2.4 to 3.3kHz	1.9 to 2.5kHz	•	2.4 to 3.3kHz		
Intermittent cycle	Approx. 170-cycle/min	-	_	Approx. 170-cycle/min		
Current consumption	See the table below		•			
Dielectric strength	Without transformer: 10	000V AC 1 minute V	Vith transformer: 2000V AC	1 minute *2		
Insulation resistance	100MΩ or more (500V D	C megger)				
Pollution degree	3					
Vibration	Resonance: 10 to 55Hz, Constant: 16.7Hz, double	•	nm			
Shock	Mechanical durability: 50	0m/s ²				
Ambient temperature	,	-20 to +60°C (No condensation or no icing) (with resistor unit: -20 to +40°C)				
Storage temperature	−30 to +70°C					
Humidity	45 to 85%RH (within –5	to 40°C)				
Degree of protection	IP00 IP54					

·Current consumption

Operational voltage	Current consumption		
	DR30B5, DR30B8	DR30B6	DR30B0
6V AC	70mA AC	_	_
6V DC	35mA DC	25mA AC	_
24V AC	-	45mA AC	_
24V DC	-	30mA DC	_
24V AC/DC	40mA AC, 25mA DC	30mA AC, 20mA DC	_
48V AC/DC	65mA AC, 20mA DC	_	_
110V AC	30mA AC	30mA AC	30mA AC
110V DC	30mA DC	_	_
220V AC	15mA AC	15mA AC	20mA AC

Note: *1 DR30B0 (without transformer): 250V AC
*2 DR30B0 (without transformer): 2000V AC 1 minute



Pushbuttons/Selectors/Pilot Lights/Buzzers AR30 and DR30 Ratings and specifications

■ Contact ratings • UL/CSA standards

AC (COS Ø=0.35)

Contact rated code	120V		240V		480V		600V	
	Making current	Breaking current						
A600	60A	6.0A	30A	3.0A	15A	1.5A	12A	1.2A

DC $T_{0.95}$ = 6P (Max. 300ms)

Description	Contact rated	Making current · Breaking current			
	code	125V	250V	301V-600V	
Illuminated pushbutton switch Pushbutton (Ring type selector switch: AR30S2R only) Emergency stop pushbutton switch Emergency stop illuminated pushbutton switch (Except the overlap contact types)	P600	1.1A	0.55A	0.2A	
Overlap contact types of products shown above Pushbutton (Ring type selector switch: AR30S1R, S6R only) Selector switch (2-position only, except the overlap contact types) Illuminated selector switch (2-position only, except the overlap contact types)	Q600	0.55A	0.27A	0.1A	
Pushbutton (Ring type selector switch: AR30S3R only) Selector switch (2-pos./overlap contact type, 3-, 4-, 5-pos. type) Illuminated selector switch (2-pos./overlap contact type, 3-pos. type)	R300	0.22A	0.11A	-	

Note: Joy stick selector switches (Lever switches): 250V AC, 5A (Res. load) 125V DC, 0.2A 24V DC, 1A (Res. load)

EN standard/TÜV approved

Description	Rated operation	nal current		
	Rated thermal	Rated operational	AC15 (Ind. load)	DC13 (Ind. load)
	current	voltage	Rated operational current	Rated operational current
Illuminated pushbutton switch	10A	24V	6.0A	4.0A
Pushbutton (Except the selector ring type)		120V	6.0A	
Emergency stop pushbutton switch		125V	_	1.3A
Emergency stop illuminated pushbutton switch		240V	6.0A	
Selector switch (2-position)		250V	_	0.45A
Illuminated selector switch (2-position)		480V	2.5A	_
		600V	2.0A	_
Selector switch (3, 4, 5-position)	10A	24V	6.0A	2.0A
Illuminated selector switch (3-position)		120V	6.0A	-
Pushbutton with selector ring		125V	-	0.65A
		240V	6.0A	_
		250V	_	0.23A
		480V	2.5A	_
		600V	2.0A	_
Joy stick selector switch (Lever switch)	5A	24V	_	0.7A
		120V	0.3A	_
		125V	_	0.15A
		240V	0.3A	_

Lamp rated voltage UL/CSA standards, TÜV approved

	LED lamp	Incandescent lamp	
Full-voltage (without transformer)	Max. 24V AC/DC	Max. 30V AC/DC	
With transformer	Max. 550V AC (Short-body type: Max. 220V AC)		



AR30 and DR30 Ratings and specifications

■ Operating characteristic (1NO+1NC)

Description	Pushbutton	Emergency stop pushbutto	on	Selector *2			
	Illuminated pushbutton	Emergency stop illuminate	d pushbutton	Illuminated sel	ector		
		Push-lock type	Push-pull type	Maintained	Spring/manual return	Spring return	
Ave. required operating force	9N (Push-lock type: 20N)	30N *1	45N	0.15N·m	0.13N•m	0.1N•m	
Operating travel	Approx. 6mm	Approx. 9mm	Approx. 9mm	2-position: Approx. 90°	3-position: Approx. 45°	2-position: Approx. 60°	
	(Push-lock type: Approx. 9mm, operation	(Operation angle: Approx. 45°)		3-position: Approx. 45°		3-position: Approx. 45°	
	angle: Approx. 45°)			4-position: Approx. 40°			
				5-position: Approx. 30°			
Required return	_	0.6N•m	30N (pull)	0.15N·m	0.13N•m	_	
force	(Push-lock type: 0.6N·m)						

Notes: *1 AR30V2R type: 45N

■ Lamp ratings

•Illuminated pushbuttons, illuminated selectors, pilot lights (round type)

Transformer	Lamp voltage	LED (lamp bas	(lamp base: BA9S/13)		Incandes	cent (lamp base	e: BA9S/13)
		Туре	Rated voltage	Consumption	Type	Rated voltage	Consumption
Without	5.5V AC/DC	_	_	-	AHX135	6.3V AC/DC	0.9W
transformer	6V AC	APX510-6□	6V AC	Green, red, orange, amber: 7mA AC	-	-	_
				Yellow: 26mA AC Blue: 16mA AC			
	6V DC	APX510-D6□	6V DC	Green, red, orange, amber: 11mA DC	_	-	_
				Yellow: 33mA DC Blue: 22mA DC			
	12V AC/DC	APX510-12□	12V AC/DC	14mA AC, 11mA DC	-	-	-
	15V AC/DC	APX510-15□	15V AC/DC	13mA AC, 11mA DC	AHX279	18V AC/DC	0.8W
	20V AC/DC	_	-	_	AHX144	24V AC/DC	0.9W
	24V AC/DC	APX510-24□	24V AC/DC	12mA AC, 11mA DC	AHX129	30V AC/DC	0.8W
With transformer	110V AC	APX510-6□	6V AC	1.5VA	AHX135	6.3V AC/DC	2VA
(Standard type:	127V AC						2VA
AR9T511)	220V AC						2VA
	254V AC	APX510-6□	6V AC	2.5VA	AHX135	6.3V AC/DC	2.5VA
	380V AC						2.5VA
	440V AC						2.5VA
	480V AC						2.5VA
	550V AC						2.5VA
With resistor unit	110V DC	APX510-24□	24V AC/DC	1.2W	-	-	_
(AR9T519-H)							

Notes: • Short body pilot lights: 110V AC, 127V AC, 220V AC only

·Pilot lights with resistor

Lamp Voltage	LED (lamp base: E12/15)			Incandescent (lamp base: E12/15)		
	Туре	Rated voltage	Consumption	Туре	Rated voltage	Consumption
50V DC	APX507-24□ *	24V AC/DC	0.8W	AHX130	18V AC/DC	5W
110V DC			1.7W			10W
220V DC			3.3W			20W

Notes: * White: APX509-24O

^{*2 4-}position, 5-position: 2NO+2NC

[•] Replace the ☐ mark by the lamp luminous color code, see page 70

 $[\]bullet$ Replace the \square mark by the lamp luminous color code, $\it see$ $\it page~70$



Pushbuttons/Selectors/Pilot Lights/Buzzers AR30 and DR30 **Ratings and specifications**

•Pilot lights (DR30F4M, F4N, M4M types)

Transformer	Lamp voltage	LED (lamp base	e: BA9S/13)		Incandes	Incandescent (lamp base: BA9S/13)		
		Type*	Rated voltage	Consumption	Туре	Rated voltage	Consumption	
Without	5.5V AC/DC	_	_	_	AHX135	6.3V AC/DC	0.9W	
transformer	6V DC	DR9Q001-6□	6V DC	Yellow, orange, amber: 120mA DC	_	_	-	
		DR9Q002-6□		Red: 48mA DC				
		DR9Q003-6□						
	12V AC	DR9Q001-2□	12V AC	Yellow, orange, amber: 90mA AC	_	_	_	
		DR9Q002-2□		Red: 25mA AC				
		DR9Q003-2□						
	12V AC/DC	DR9Q001-B□	12V AC/DC	Yellow, orange, amber:	_	_	_	
		DR9Q002-B□		84mA AC, 60mA DC				
		DR9Q003-B□		Red: 27mA AC, 24mA DC				
	15V AC/DC	_	_	_	AHX279	20V AC/DC	0.8W	
	20V AC/DC	_	_	_	AHX144	24V AC/DC	0.9W	
	24V AC/DC	DR9Q001-E□	24V AC/DC	Yellow, orange, amber:	AHX129	30V AC/DC	0.8W	
		DR9Q002-E□		42mA AC, 30mA DC				
		DR9Q003-E□		Red: 16mA AC, 12mA DC				
With	110V AC	DR9Q001-2□	12V AC	3VA	AHX135	6.3V AC/DC	2VA	
transformer	127V AC	DR9Q002-2□					2VA	
unit	220V AC	DR9Q003-2□					2VA	
(LED:	254V AC						2.5VA	
AR9T557)	380V AC						2.5VA	
(Incandes-	440V AC						2.5VA	
cent:	480V AC						2.5VA	
AR9T511)	550V AC						2.5VA	
With resistor	110V DC	DR9Q001-E□	24V AC/DC	1.4W	-	-	-	
unit		DR9Q002-E□						
(AR9T519-H)		DR9Q003-E□						

Notes: * DR9Q001: For DR30M4M type DR9Q002: For DR30F4N type
DR9Q003: For DR30F4M type
• Replace the □ mark by the lamp luminous color code, *see page 70*




AR30 and DR30 **Ratings and specifications**

■ Lamp durability

Lamp	Durability	Judgement criterion
LED		When brightness is less than 50% of initial value
Incandescent	Approx. 5000h (AC)	When the bulb burns out

Note: The operating voltage for incandescent lamps is set at 80 to 90% of the lamp's rated voltage.


Estimated durability for LED lamps



Notes: • Durability at Ta=25°C · Durability is affected by temperature, humidity, and

voltage fluctuation.

Incandescent lamp voltage characteristics



■ Combination of lens color and LED luminous color

Button color		LED lamp			LED unit			
(lens or color plate)		(high-brightness)						
Color	Code	Luminous color	Туре	Type *1	Luminous color	Type *2	Type *3	Type *4
Green	G	Green	APX510- ■ G	APX507-24G	Yellow	DR9Q003- ■ Y	DR9Q002- ■ Y	DR9Q001- ■ Y
Red	R	Red	APX510- ■ R	APX507-24R	Red	DR9Q003- ■ R	DR9Q002- ■ R	DR9Q001- ■ R
White	W	Orange	APX510- ■ O	APX509-24O	Orange	DR9Q003- ■ O	DR9Q002- ■ O	DR9Q001- ■ O
Yellow	Υ	Yellow	APX510-■Y	APX507-24Y	Yellow	DR9Q003- ■ Y	DR9Q002- ■ Y	DR9Q001- ■ Y
Orange	Α	Amber	APX510- ■ A	APX507-24A	Amber	DR9Q003- ■ A	DR9Q002- ■ A	DR9Q001- ■ A
Blue	S	Blue	APX510-■S	APX507-24S	_	_	_	_

Notes: *1 For pilot light with resistor
*2 For DR30F4M type
*3 For DR30F4N type
*4 For DR30M4M type
*5 Postocs the ** mark by the

[•] Replace the ■ mark by the lamp voltage code, see page 68,69



■ Illuminated pushbutton switches

	_					
Operator	Trans- former	Contact	LED lamp Momentary action Type	Alternate action Type	Incandescent lamp Momentary action Type	Alternate action Type
Extended round head	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR30E0L-10 3 AR30E0L-01 3 AR30E0L-11 3 AR30E0L-22 3	AR30E5L-10■3□ AR30E5L-01■3□ AR30E5L-11■3□ -	AR30E0L-10■4	AR30E5L-10■4□ AR30E5L-01■4□ AR30E5L-11■4□
AF95-4	With	1NO 1NC 1NO+1NC	AR30E0L-10■3□ AR30E0L-01■3□ AR30E0L-11■3□	AR30E5L-10■3□ AR30E5L-01■3□ AR30E5L-11■3□	AR30E0L-10■4 □ AR30E0L-01■4 □ AR30E0L-11■4 □	AR30E5L-10■4□ AR30E5L-01■4□ AR30E5L-11■4□
Extended with transparent full guard (24mm dia.)	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR30G4L-10 m 3	AR30G9L-10■3□ AR30G9L-01■3□ AR30G9L-11■3□ -	AR30G4L-10■4 ☐ AR30G4L-01■4 ☐ AR30G4L-11■4 ☐ AR30G4L-12■4 ☐	AR30G9L-10■4□ AR30G9L-01■4□ AR30G9L-11■4□ -
KKD05-164	With	1NO 1NC 1NO+1NC	AR30G4L-10■3□ AR30G4L-01■3□ AR30G4L-11■3□	AR30G9L-10■3□ AR30G9L-01■3□ AR30G9L-11■3□	AR30G4L-10■4□ AR30G4L-01■4□ AR30G4L-11■4□	AR30G9L-10■4□ AR30G9L-01■4□ AR30G9L-11■4□
Extended with full guard (24mm dia. with openings)	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR30G2L-10m3	AR30G7L-10■3□ AR30G7L-01■3□ AR30G7L-11■3□ —	AR30G2L-10■4 AR30G2L-01■4 AR30G2L-11■4 AR30G2L-11■4	AR30G7L-10 = 4
AF99-328	With	1NO 1NC 1NO+1NC	AR30G2L-10■3□ AR30G2L-01■3□ AR30G2L-11■3□	AR30G7L-10■3□ AR30G7L-01■3□ AR30G7L-11■3□	AR30G2L-10■4□ AR30G2L-01■4□ AR30G2L-11■4□	AR30G7L-10■4□ AR30G7L-01■4□ AR30G7L-11■4□
Extended with full guard (24mm dia.)	Without	1NO 1NC 1NO+1NC 2NO+2NC	AR30G3L-10m3	AR30G8L-10■3□ AR30G8L-01■3□ AR30G8L-11■3□ -	AR30G3L-10■4 AR30G3L-01■4 AR30G3L-11■4 AR30G3L-12■4	AR30G8L-10■4□ AR30G8L-01■4□ AR30G8L-11■4□
AF95-6	With	1NO 1NC 1NO+1NC	AR30G3L-10■3 ☐ AR30G3L-01■3 ☐ AR30G3L-11■3 ☐	AR30G8L-10■3□ AR30G8L-01■3□ AR30G8L-11■3□	AR30G3L-10■4□ AR30G3L-01■4□ AR30G3L-11■4□	AR30G8L-10■4□ AR30G8L-01■4□ AR30G8L-11■4□
Push-lock, turn-reset 40mm dia. with white arrow)	Without	1NO 1NC 1NO+1NC 2NO 2NC 3NC	_ _ _ _ _	AR30V5L-10 AR30V5L-01 AR30V5L-11 AR30V5L-11 AR30V5L-20 AR30V5L-02 AR30V5L-02 AR30V5L-03	_ _ _ _ _	AR30V5L-10■4
AF97-75	With	1NO 1NC 1NO+1NC 2NO 2NC	_ _ _ _	AR30V5L-10■3 AR30V5L-01■3 AR30V5L-11■3 AR30V5L-20■3 AR30V5L-02■3	_ _ _ _	AR30V5L-10■4
Push-pull (35mm dia.)	Without	1NO+1NC	AR30Q7L-11 ≡ 3 □	-	AR30Q7L-11■4 □	-
AF96-185	With	1NO+1NC	AR30Q7L-11 ■ 3□	_	AR30Q7L-11∎4 □	_

Note: ■ □ See page 72

Illuminated Pushbuttons **AR30**

·Lens color

Replace the ☐ mark by the lens color code

Color	Green	Red	White	Blue	Yellow	Orange
Code	G	R	W	S	Υ	Α

Note: AR30V5L type: Red, yellow only

•Contact arrangements
Contact arrangements other than above are available

Contact arrangement	1NO	1NC	1NO+1NC	2NO	2NC	3NO
Code	10	01	11	20	02	30

Contact arrangement	3NC	2NO+2NC	4NO	4NC	5NO	5NC	3NO+3NC
Code	03	22	40	04	50	05	33

Note: AR30Q7L type: 1NO + 1NC only

Available numbers of contact blocks

Operation	Without transformer	With transformer
Momentary action	6-contact block	4-contact block
Alternate action Push-lock, turn-reset	3-contact block	2-contact block

·Voltage

Replace the ■ mark by the lamp voltage code

Transformer		Code	
		LED	Incandescent
Without transformer	6V DC 6V AC 5.5V AC/DC 12V AC/DC 15V AC/DC 20V AC/DC 24V AC/DC	6 A BC E	
With transformer	100-110V AC 115-127V AC 200-220V AC 230-254V AC 350-380V AC 400-440V AC 480V AC 500-550V AC	H L M Q S T > W	H L M Q S T V W


·Contact operation (AR30Q7L)

Conta	act block	Button	position	
No.	Туре	Pull	Free	Push
(1)	NC	•		
(2)	NC			


Contact closed

·Position of contact block

AR30Q7L (without transformer)



AR30Q7L (with transformer)





■ Pushbutton switches

Operator	Contact	Momentary Alternate action action Type Type	 Operator	Contact	Momentary action Type	Alternate action Type
Flush round head	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30F0R-10 AR30F5R-10 AR30F0R-01 AR30F5R-01 AR30F0R-11 AR30F5R-11 AR30F0R-20 AR30F5R-20 AR30F0R-02 AR30F5R-02 AR30F0R-22 AR30F5R-22	Extended with half guard	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30G0R-20□ AR30G0R-02□	
Extended round head	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30E0R-10 AR30E0R-01 AR30E0R-01 AR30E0R-11 AR30E5R-10 AR30E5R-11 AR30E0R-20 AR30E5R-20 AR30E0R-02 AR30E5R-02 AR30E0R-22 AR30E5R-22	Pin lock AF96-240	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30GPR-10 AR30GPR-01 AR30GPR-11 AR30GPR-20 AR30GPR-02 AR30GPR-22	_ _ _
Flush round head symbol mark type	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30FAR-10C■ AR30FBR-10C AR30FAR-01C■ AR30FBR-01C AR30FAR-11C■ AR30FBR-11C AR30FAR-20C■ AR30FBR-20C AR30FAR-02C■ AR30FBR-02C AR30FAR-22C■ AR30FBR-22C	Mushroom head with full guard (40mm dia.)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30M3R-01□ AR30M3R-11□ AR30M3R-20□ AR30M3R-02□	AR30M8R-10 AR30M8R-01 AR30M8R-11 AR30M8R-20 AR30M8R-02 AR30M8R-02 AR30M8R-22
Extended round head symbol mark type	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30EAR-10C■ AR30EBR-100 AR30EAR-01C■ AR30EBR-010 AR30EAR-11C■ AR30EBR-110 AR30EAR-20C■ AR30EBR-200 AR30EAR-02C■ AR30EBR-020 AR30EAR-22C■ AR30EBR-220	Mushroom head with full guard (35mm dia. metal nut)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30GSR-10 AR30GSR-01 AR30GSR-11 AR30GSR-20 AR30GSR-02 AR30GSR-22	_ _ _
Mushroom head (40mm dia.)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30M0R-10□ AR30M5R-10 AR30M0R-01□ AR30M5R-01 AR30M0R-11□ AR30M5R-11 AR30M0R-20□ AR30M5R-20 AR30M0R-02□ AR30M5R-02 AR30M0R-22□ AR30M5R-22	Giant head	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30B0R-10 AR30B0R-01 AR30B0R-11 AR30B0R-20 AR30B0R-02 AR30B0R-22	_ _ _
Mushroom head (29mm dia.)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30M4R-10 □ − AR30M4R-01 □ − AR30M4R-11 □ − AR30M4R-20 □ − AR30M4R-02 □ − AR30M4R-22 □ −	Giant head with guard	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30B1R-10 AR30B1R-01 AR30B1R-11 AR30B1R-20 AR30B1R-02 AR30B1R-22	
Extended with full guard (24mm dia.)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30G1R-10	Giant head with full guard	1NO 1NC 1NO+1NC 2NO 2NC 2NC+2NC	AR30B2R-10	_ _ _

Note: ■ ☐ See page 74



Pushbuttons **AR30**

Operator	Contact	Momentary action Type	Alternate action Type
Giant head with full guard	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30B3R-10 AR30B3R-01 AR30B3R-11 AR30B3R-20 AR30B3R-02 AR30B3R-22	- - - - -
Push, turn-lock AF95-583	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30N0R-10	- - - - -

Operator	Contact	Momentary action Type	Alternate action Type
Push-lock, turn-reset (40mm dia. with white arrow)	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	- - - -	AR30V5R-10
Pushbutton with emergency operating cap	1NO 1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30FVR-10 AR30FVR-01 AR30FVR-11 AR30FVR-20 AR30FVR-02 AR30FVR-02 AR30FVR-22	_ _ _ _ _

·Button color

Replace the ☐ mark by the button color code

Color	Green	Red	White	Blue	Yellow	Orange	Black
Code	G	R	W	S	Υ	Α	В

Note: AR30V5R type: Red, yellow, black only

·Contact arrangements

Contact arrangements other than above are available

Contact arrangement	1NO	1NC	1NO+1NC	2NO	2NC	3NO	3NC
Code	10	01	11	20	02	30	03

Contact arrangement	2NO+2NC	4NO	4NC	5NO	5NC	3NO+3NC	4NO+4NC
Code	22	40	04	50	05	33	44

·Available numbers of contact blocks

Momentary action	Alternate action Push-lock, turn-reset
8-contact block	4-contact block

•Symbol mark (For AR30FAR, FBR, EAR, EBR)

Replace the ■ mark by the symbol mark code

Symbol mark	0		ı		T		0		T
Color of button	White	Black	White	Black	White	Black	Clear		
Color of mark	Red		Green		Green		Black		
Code	01	02	03	04	11	12	02B	04B	12B




Contact (The following	Button	Туре	Contact operation						
	COIOI		Contact blo	ock	Left		Right		
			Mounting position	Туре	Free	Depressed	Free	Depressed	
2NO+2NC	Green	AR30S1R-22G	(1)	NC	_	_	•	_	
	Black	AR30S1R-22B	(2)	NC	_	_	•	_	
	Yellow	AR30S1R-22Y	(3)	NO	_	•	_	•	
	Orange Blue	AR30S1R-22S	(4)	NO	_	•	_	•	
	Green	AR30S2R-20G	(1)	NO	-	•	_	_	
	Black White Yellow Orange AR	AR30S2R-20B	(2)	NO	_0	_	_	•	
		AR30S2R-20W AR30S2R-20Y AR30S2R-20A AR30S2R-20S			5.				
	Green	led AR30S2R-22R AR30S2R-22B White AR30S2R-22W AR30S2R-22Y Drange AR30S2R-22A	(1)	NC	•	ı			
	Black		(2)	NC			•	_	
	Yellow Orange		(3)	NO	_	•	_	_	
2010 12010					_	_			
ZNOTZNO	Red	AR30S3R-22R							
	White	AR30S3R-22W					_	_	
	Orange	Orange AR30S3R-22A			_			_	
2NO+2NC		AR30S6R-22G AR30S6R-22R AR30S6R-22B AR30S6R-22W					_		
	Red A A Black A White Yellow Orange A						_	Locked	
					_	•			
		AR30S6R-22A			_				
	(The following contact is only available.) 2NO+2NC	Color color color color color contact is only available.) 2NO+2NC Green Red Black White Yellow Orange Blue 2NO Green Red Black White Yellow Orange Blue 2NO+2NC Green Red Black White Yellow Orange Blue	(The following contact is only available.) color 2NO+2NC Green Red Black White Yellow Orange Blue AR30S1R-22G AR30S1R-22W AR30S1R-22W AR30S1R-22W AR30S1R-22Y AR30S1R-22Y AR30S1R-22A AR30S1R-22S 2NO Green Red AR30S2R-20G AR30S2R-20G AR30S2R-20B White AR30S2R-20W Yellow AR30S2R-20W AR30S2R-20W AR30S2R-20W AR30S2R-20W AR30S2R-20W AR30S2R-22W AR30S2R-22B Black AR30S2R-22B Black AR30S2R-22B Black AR30S2R-22W Yellow AR30S2R-22W AR30S2R-22W AR30S2R-22S 2NO+2NC Green Red AR30S3R-22G AR30S3R-22B Black AR30S3R-22B Black AR30S3R-22B Black AR30S3R-22B Black AR30S3R-22W AR30S3R-22W AR30S3R-22Y AR30S3R-22S 2NO+2NC Green Red Black AR30S3R-22B AR30S3R-22B Black AR30S3R-22B Black White Yellow Orange AR30S6R-22B AR30S6R-22W AR30S6R-22Y AR30S6R-22Y AR30S6R-22Y AR30S6R-22Y AR30S6R-22Y AR30S6R-22Y AR30S6R-22Y AR30S6R-22Y AR30S6R-22A	Contact bid Contact bid	Contact is only available. Contact block Contact block	Contact is only available. Contact is only available. Contact block	Contact block	Contact is only available. Contact block	

Note: (1) to (4): Contact block mounting position

Contact closedContact open

Position of contact block



Notes: Contact block color NC: red NO: blue

Emergency Stop Pushbuttons **AR30**

■ Emergency stop pushbutton switches

(Direct opening action), conform to EN418

Operator	Contact	Туре
Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	1NC 1NO+1NC 2NC 1NO+3NC 2NO+2NC	AR30V0R-01R AR30V0R-11R AR30V0R-02R AR30V0R-13R AR30V0R-22R
Push-lock, turn-reset (40mm dia.)	1NC 1NO+1NC 2NC 1NO+3NC 2NO+2NC	AR30V2R-01R AR30V2R-11R AR30V2R-02R AR30V2R-13R AR30V2R-22R
Push-lock, turn-reset (Soft-touch 65mm dia. with white arrow)	1NC 1NO+1NC 2NC 1NO+3NC 2NO+2NC	AR30V1R-01R AR30V1R-11R AR30V1R-02R AR30V1R-13R AR30V1R-22R
Push-lock, pull-reset (35mm dia.)	1NC 1NO+1NC 2NC	AR30Q2R-01R AR30Q2R-11R AR30Q2R-02R

Note: Button color: Red only

·Contact arrangements

Contact arrangements other than above are available

Contact	1NO	1NO+1NC	2NC	3NC	2NO+2NC	4NC	1NO+3NC
arrangement							
Code	01	11	02	03	22	04	13

Notes: • Except AR30Q2R

[•] For push-lock, pull-reset type, up to 2-contact block.

■ Emergency stop illuminated pushbutton switches

(Direct opening action), conform to EN418

Operator	Transformer	Contact	LED lamp Type	Incandescent lamp Type
Push-lock, turn-reset (Soft-touch 40mm dia. with white arrow)	Without	1NC 1NO+1NC 2NC 1NO+2NC 3NC	AR30V0L-01■3R AR30V0L-11■3R AR30V0L-02■3R AR30V0L-12■3R AR30V0L-03■3R	AR30V0L-01■4R AR30V0L-11■4R AR30V0L-02■4R AR30V0L-12■4R AR30V0L-03■4R
	With	1NC 1NO+1NC 2NC	AR30V0L-01■3R AR30V0L-11■3R AR30V0L-02■3R	AR30V0L-01■4R AR30V0L-11■4R AR30V0L-02■4R
Push-lock, turn-reset (40mm dia.)	Without	1NC 1NO+1NC 2NC 3NC	AR30V2L-01■3R AR30V2L-11■3R AR30V2L-02■3R AR30V2L-03■3R	AR30V2L-01■4R AR30V2L-11■4R AR30V2L-02■4R AR30V2L-03■4R
	With	1NC 1NO+1NC 2NC	AR30V2L-01■3R AR30V2L-11■3R AR30V2L-02■3R	AR30V2L-01■4R AR30V2L-11■4R AR30V2L-02■4R

Notes: •

•Voltage
Replace the ■ mark by the lamp voltage code

Without 6V DC 6 —	nt
6V AC	

Transformer		Code LED	Incandescent
With	100-110V AC 115-127V AC 200-220V AC 230-254V AC 350-380V AC 400-440V AC 480V AC 500-550V AC	H L M Q S T V W	H L M Q S T V

Button color: Red onlyContact arrangements indicated in the table can be supplied.

Selector Switches **AR30**

■ Selector switches

2-position

Operator	Operation	Knob color or key removable	Contact	Type Switch with	Contact opera	ation (Example)	
		position		round bezel	Contact	Operator position	
					arrangement	Left Right	
Knob	Maintained each 90°	Color code: B: Black (Standard) Color other than above are available	1NO 1NC 1NO+1NC 2NO 2NC 2NC+2NC	AR30PR-210B AR30PR-201B AR30PR-211B AR30PR-220B AR30PR-202B AR30PR-222B	1NO (1)	Upper contact ③ ④	
AF95-13	Spring return Solution	(G: Green R: Red	1NO 1NC 1NO+1NC 2NO 2NC 2NC 2NO+2NC	AR30PR-010B AR30PR-001B AR30PR-011B AR30PR-020B AR30PR-002B AR30PR-022B	-1NC (1) 1NO+1NC	Upper contact ① — ② Upper contact	
Lever	Maintained each 90°		1NO 1NC 1NO+1NC 2NO 2NC 2NC 2NO+2NC	AR30WR-210B AR30WR-201B AR30WR-211B AR30WR-220B AR30WR-202B AR30WR-222B	(1)	3 — 4 4 Lower contact ① — 2	
AF95-14	Spring return		1NO 1NC 1NO+1NC 2NO 2NC 2NC 2NO+2NC	AR30WR-010B AR30WR-001B AR30WR-011B AR30WR-020B AR30WR-002B AR30WR-002B	2NO+2NC (1)	Upper contact ③ ④	
Key	Maintained each 90°	■: Key removable position (): Key type See page 04/83	1NO 1NC 1NO+1NC 2NO 2NC 2NC 2NO+2NC	AR30J□R-2■10() AR30J□R-2■01() AR30J□R-2■11() AR30J□R-2■20() AR30J□R-2■22() AR30J□R-2■22()	(2)	3 — 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	
AF95-15	60°		1NC 1NO+1NC 2NO 2NC 2NO+2NC	AR30J□R-0A01() AR30J□R-0A11() AR30J□R-0A20() AR30J□R-0A02() AR30J□R-0A22()	Upper contact (3) (1) Operator (4) (2) Name plate side		

Notes: • (1) to (4): Contact block mounting position

Contact closed

Operator

Replace the \square mark by the cylinder key type code

Standard type: Blank Long durability type: A

[•] \bigcirc - \bigcirc , \bigcirc - \bigcirc : Contact block terminal No.

[•] Contact arrangements: See page 80



3-position

Operator	Operation Knob color		Contact Type Switch with		Contact operation (Example)			
				round bezel	Contact	Operation pos	ition	
					arrange- ment	L C R	L C R	
Knob	Maintained each 45°	Color code: B: Black (Standard) Color other than	1NO+1NC 2NO 2NC 2NO+2NC	AR30PR-311B AR30PR-320B AR30PR-302B AR30PR-322B	1NO+1NC (1) (2)	Upper contact (3) (4)	Lower contact	
	Spring/manual return each 45°	above are available (G: Green R: Red	1NO+1NC 2NO 2NC 2NC+2NC	AR30PR-611B AR30PR-620B AR30PR-602B AR30PR-622B				
	Spring/manual return each 45°		1NO+1NC 2NO 2NC 2NO+2NC	AR30PR-711B AR30PR-720B AR30PR-702B AR30PR-722B	1NO+1NC (1) (2)	Upper contact 3 4	Lower contact	
	Spring return		2NO+2NC	AR30PR-122B	2NO+2NC	Upper contact	Lower contact	
AF95-13					(1) (2)			
	each 45°		.0	6),	(3) (4)	3 + + 4	3 4 4	
Lever	Maintained each 45°		1NO+1NC 2NO 2NC 2NO+2NC	AR30WR-311B AR30WR-320B AR30WR-302B AR30WR-322B	1NO+1NC (1) (2)	Upper contact 3 4	Lower contact	
	Spring/manual return each 45°	C	1NO+1NC 2NO 2NC 2NO+2NC	AR30WR-611B AR30WR-620B AR30WR-602B AR30WR-622B				
Spring/manual return each 45°		1NO+1NC 2NO 2NC 2NO+2NC	AR30WR-711B AR30WR-720B AR30WR-702B AR30WR-722B	1NO+1NC (1) (2)	Upper contact 3 4	Lower contact		
AF95-14	Spring return		2NO+2NC	AR30WR-122B	2NO+2NC (1) (2)	Upper contact	Lower contact	
	each 45°				(3) (4)	3+++4	3	

Note: • Contact arrangements: See page 80

Contact closed

Selector Switches **AR30**

Operator	Operation	Key removable position	Contact	Type Switch with	Contact operation (Example)			
		poolii.e		round bezel	Contact	Operator posit	ion	
				arrange- ment	L C R	L C R		
Key	Maintained each 45°	■: Key removable position (): Key type	1NO+1NC 2NO 2NC 2NC 2NO+2NC	AR30J□R-3■11() AR30J□R-3■20() AR30J□R-3■02() AR30J□R-3■22()	1NO+1NC (1) (2)	3 1	Lower contact	
	Spring/manual return each 45°		1NO+1NC 2NO 2NC 2NO+2NC	AR30J□R-6■11() AR30J□R-6■20() AR30J□R-6■02() AR30J□R-6■22()	2			
	Spring/manual return each 45°		1NO+1NC 2NO 2NC 2NO+2NC	AR30J□R-7■11() AR30J□R-7■20() AR30J□R-7■02() AR30J□R-7■22()	1NO+1NC (1) (2)	Upper contact 3 4	Lower contact	
AF95-15	Spring return		2NO+2NC	AR30J□R-1E22()	2NO+2NC (1) (2)	Upper contact	Lower contact	
	each 45°				(3) (4)	3 + + + 4	3 4 4	

Notes: Operator position L: Left, C: Center, R: Right

- (1) to (4): Contact block mounting position
- ① ②, ③ ④: Contact block terminal No.

·Contact arrangements

Contact arrangements other than above are available

Contact arrangement	1NO	1NC	1NO+1NC	2NO	2NC	3NO	3NC
Code	10	01	11	20	02	30	03

·Available numbers of contact blocks

Mainted	Spring return Spring/manual return
8-contact block	4-contact block


Contact arrangement	2NO+2NC	4NO	4NC	5NO	5NC	3NO+3NC	4NO+4NC
Code	22	40	04	50	05	33	44

· Key removable positions

Code	Α	В	С	D	E	F	G
Removable position	A5° - 45°	\$5° 45°	\$5° 45°	45, 45,	450	\$5° 45°	450
AR30J□R-2	•	•	_	•	_	_	_
AR30J□R-0	•	_	_	_	_	_	_
AR30J□R-3	•	•	•	•	•	•	•
AR30J□R-6	_	-	_	•	•	•	_
AR30J□R-7	•	-	_	_	•	_	•
AR30J□R-1	_	_	_	_	•	_	_

●: Available —: Not available

· Position of contact block



Contact closed

· Key code No.

Replace the () mark with one of the following key code. A, B, C, D, E and F Standard key code is A.

Operator

Replace the □ mark by the cylinder key type code Standard type: Blank Long durability type: A



■ Selector switches (control type)

3-position	o (dontion typo)			
Operator	Operation	Knob color or key removable position	Contact arrangement	Type Switch with round bezel
Knob	Maintained each 45°	Color code: B: Black (Standard)	Replace the ■ mark by the contact arrangement code	AR30PCR-3■B
	Spring/manual return (†) each 45°	Color other than above are available	(shown on next page).	AR30PCR-6■B
	Spring/manual return each 45° (G: Green R: Red)		AR30PCR-7■B	
AF95-475	Spring return † each 45°	h 45°		AR30PCR-1■B
ever	Maintained each 45°	Replace the ■ mark by the contact arrangement code	mark by the contact	AR30WCR-3■B
	Spring/manual return ① each 45°		(shown on next page).	AR30WCR-6■B
A STATE OF THE PARTY OF THE PAR	Spring/manual return teach 45°			AR30WCR-7■B
KK02-140A	Spring return (†) each 45°		0	AR30WCR-1■B
(ey	Maintained each 45°	Replace the mark by the key removable	Replace the ■ mark by the contact arrangement code	AR30JCR-3□■()
	Spring/manual return (†) each 45°	position code: A, B, C, D, E F or G	(shown on next page).	AR30JCR-6□■()
	Spring/manual return the each 45°	FUIG		AR30JCR-7□■()
			1	

· Key removable positions

AF95-474

Code	Α	В	С	D	Е	F	G
Removable position	**************************************	***	\$5° 48°	45° 45°	45° 45°	\$5° 45°	\$5 45°
AR30JCR-3 AR30JCR-6 AR30JCR-7 AR30JCR-1	• - • -	- - -	• - - -	• • - -	•	• • - -	• - • -

Spring return

the each 45°

●: Available -: Not available

•Key code No.
Replace the () mark with one of the following key code.
A, B, C, D, E and F
Standard key code is A.

AR30JCR-1E**■**()


Selector Switches **AR30**

Contact arrangement code (Typical example)

Contact	Contact	Contact op	eration			
arrange- ment	arrange- ment	Contact blo	ock	Operator	r position	
	code	Mounting position	Туре	Left	Center	Right
2NC	01F	(1)	NC			
		(2)	NC			
		_	_	_	_	_
		_	_	_	_	_
2NO+2NC	014	(1)	NC			
		(2)	NC			
		(3)	NO			•
		(4)	NO	•		
4NC	01J	(1)	NC			
		(2)	NC			
		(3)	NC			
		(4)	NC			
2NO+2NC	024	(1)	NC			
		(2)	NC		•	
		(3)	NO			•
		(4)	NO	•		
2NO+2NC	03C*	(1)	NC			
	(Maintained	(2)	NC			•
	only)	(3)	NO		5	•
		(4)	NO	•		
2NO+2NC	044*	(1)	NC			
		(2)	NC		•	
		(3)	NO			•
		(4)	NO	•		
2NO+2NC	054	(1)	NC			
		(2)	NC		•	
		(3)	NO			•
		(4)	NO			•

Contact	Contact	Contact operation						
arrange-	arrange-			0				
ment	ment code	Contact blo		Operator	position	ı		
		Mounting position	Type	Left	Center	Right		
		position						
2NO+2NC	064	(1)	NC					
		(2)	NC		•			
		(3)	NO	•				
		(4)	NO	•		•		
1NO+1NC	07F	(1)	NC					
		(2)	NO			•		
		- ()	_	-	_	_		
		-	_	-	_	_		
2NO+2NC	07C*	(1)	NC					
	(Maintained only)	(2)	NC			•		
		(3)	NO	•				
		(4)	NO	•				
2NO+2NC	084	(1)	NC					
		(2)	NC		•			
		(3)	NO	•				
		(4)	NO	•				
2NO+2NC	094*	(1)	NC					
		(2)	NC		•			
		(3)	NO	•				
		(4)	NO			•		
2NO+2NC	104	(1)	NC		•			
		(2)	NC		•			
		(3)	NO	•		•		
		(4)	NO	•		•		
2NO+2NC	11C*	(1)	NC		•			
		(2)	NC			•		
	(Maintained only)	(3)	NO	•		•		
		(4)	NO	•				

· Position of contact block



Notes: ●: Contact closed Blank: Contact open

* There may be some overlap in the contact when switching between notches.




· Contact arrangement code (Typical example)

Contact arrange-	Contact arrange-	Contact op	eration			
ment	ment	Contact blo	ock	Operator	position	
	code	Mounting position	Туре	Left	Center	Right
2NO+2NC	124*	(1)	NC		•	
		(2)	NC		•	
		(3)	NO	•		•
		(4)	NO	•		
2NO+2NC	134*	(1)	NC		•	
		(2)	NC		•	
		(3)	NO	•		•
		(4)	NO			•
3NO+1NC	14D*	(1)	NO	•		
	(Maintained	(2)	NC		•	
	only)	(3)	NO	•		
		(4)	NO			•
3NO+1NC	15A*	(1)	NO			•
		(2)	NC		•	
		(3)	NO			•
		(4)	NO	•		
2NO+2NC	164	(1)	NC		•	
		(2)	NC			
		(3)	NO	•		
		(4)	NO			
2NO+2NC	174*	(1)	NC		•	
		(2)	NC		•	
		(3)	NO	•		
		(4)	NO			•
2NO+2NC	184	(1)	NC		•	
		(2)	NC		•	
		(3)	NO			•
		(4)	NO			•

Contact arrange-	Contact operation						
ment	ment	Contact block		Operator position			
	code	Mounting position	Туре	Left	Center	Right	
2NO+2NC	194	(1)	NC				
		(2)	NC				
		(3)	NO	•			
		(4)	NO			•	
4NO	20B	(1)	NO			•	
		(2)	NO	•			
		(3)	NO			•	
		(4)	NO	•			

Notes: ●: Contact closed Blank: Contact open

· Position of contact block



^{*} There may be some overlap in the contact when switching between notches.

Selector Switches **AR30**


4, 5-position

Operator	Contact (The following contact is only available.)	Operation	Knob color	Contact arrangement	Type Switch with round bezel
Knob AF95-475	2NO+2NC	4-position maintained	Color code: B: Black (Standard) Color other than	Replace the ■ mark by the contact arrangement code	AR30PCR-4■B
	5-position maintained	above are available (G: Green R: Red	(shown below)	AR30PCR-5■B	
Lever	2NO+2NC	4-position maintained			AR30WCR-4■B
KK02-140A		5-position maintained		62*	AR30WCR-5■B


• Contact arrangement code

Position	Contact	Contact	Contact operation			
	arrange- ment	arrange- ment code	Contact bloo	ck	Operator position	
		code	Mounting position	Туре	1 2 3 4 5	
4-position	2NO+2NC	41C* (Main- tained	(1)	NC	+++	
		only)	(2)	NC	-	
			(3)	NO	 	
			(4)	NO		
5-position	2NO+2NC	51C* (Main-	(1)	NC	++++	
		tained only)	(2)	NC	 	
			(3)	NO	 	
			(4)	NO		
Nata a Canta						

· Position of contact block



Operator position 4-position 5-5-position



Notes: ●: Contact closed

* There may be some overlap in the contact when switching between notches.

■ Illuminated selector switches

2-position

Operator	Operation	Contact	LED lamp		Incandescent la	Incandescent lamp	
			Transformer	Туре	Transformer	Туре	
	Maintained	1NO 1NC 1NO+1NC 2NO+2NC	Without	AR30PL-210■3 ☐ AR30PL-201■3 ☐ AR30PL-211■3 ☐ AR30PL-222■3 ☐	Without	AR30PL-210 ■ 4 AR30PL-201 ■ 4 AR30PL-211 ■ 4 AR30PL-222 ■ 4	
	each 90°	1NO 1NC 1NO+1NC 2NO	With	AR30PL-210■3□ AR30PL-201■3□ AR30PL-211■3□ AR30PL-220■3□	With	AR30PL-210■4 AR30PL-201■4 AR30PL-211■4 AR30PL-220■4	
	Spring return	1NO 1NC 1NO+1NC 2NO	Without	AR30PL-010m3	Without	AR30PL-010m4 AR30PL-001m4 AR30PL-011m4 AR30PL-020m4 AR30PL	
	© 60°	1NO 1NC 1NO+1NC 2NO	With	AR30PL-010m3 AR30PL-001m3 AR30PL-011m3 AR30PL-020m3	With	AR30PL-010■4□ AR30PL-001■4□ AR30PL-011■4□ AR30PL-020■4□	

3-position

o position							
Operator	erator Operation C		Contact	LED lamp	LED lamp		amp
				Transformer	Туре	Transformer	Туре
Knob	Maintained		1NO+1NC 2NO+2NC	Without	AR30PL-311■3□ AR30PL-322■3□	Without	AR30PL-311■4□ AR30PL-322■4□
AF95-5	each 45°		1NO+1NC	With	AR30PL-311 ≡ 3□	With	AR30PL-311■4□
	Spring/manual return	₾	1NO+1NC 1NO+1NC	Without With	AR30PL-611■3□ AR30PL-611■3□	Without With	AR30PL-611■4□ AR30PL-611■4□
	each 45°	1	1NO+1NC 1NO+1NC	Without With	AR30PL-711■3□ AR30PL-711■3□	Without With	AR30PL-711■4□ AR30PL-711■4□

Note: □, ■ See page 86

Illuminated Selector Switches **AR30**

• Replace the ■ mark by the following lamp voltage code

	<u> </u>		
Transformer	Voltage	Code LED	Incandescent
Without	5V AC/DC	_	5
	6V DC	6	_
	6V AC	A	_
	12V AC/DC	В	_
	15V AC/DC	С	С
	20V AC/DC	-	D
	24V AC/DC	E	E
With	100-110V AC	Н	Н
	115-127V AC	L	L
	200-220V AC	M	M
	230-254V AC	Q	Q
	350-380V AC	S	S
	400-440V AC	T	T
	480V AC	V	V
	500-550V AC	W	W

• Replace the □ mark by the following knob color code

Color	Green	Red	White	Blue	Yellow	Orange
Code	G	R	W	S	Υ	Α

• Up to 4-contact of contact arrangement can be made. Available numbers of contacts are as follow.

71101101010							
No. of position	Operation	Without transformer	With transformer				
2-position	Maintained	6-contact	4-contact				
	Spring return	3-contact	2-contact				
3-position	Maintained	6-contact	4-contact				
	Spring/manual return	3-contact	2-contact				

• Contact arrangement and operator position

2-position

Transformer	Contact	Contact blo	ock	Operator position		
	arrangement	Mounting	Туре	Left	Right	
		position		0	\oslash	
With/without	1NO	(1)	NO	_	•	
With/without	1NC	(1)	NC	•	-	
Without	1NO+1NC	(1) (2)	NO NC	-		
With	1NO+1NC	(1) (2)	NC NO		-	
With/without	2NO	(1) (2)	NO NO	<u>J-</u>	•	
Without	2NO+2NC *1	(1) (2) (3) (4)	NO NC NO NC	- • - •	• - • -	
With	2NO+2NC *1	(1) (2) (3) (4)	NC NC NO NO	• • - -	- - •	

Notes: *1: AR30PL-2

● : Contact closed, -: Contact open


Transformer	Contact	Contact bl	ock	Opera	ator _l	oosition
	arrangement	Mounting	Туре	Left	Center	Right
		position		\bigcirc	1	\oslash
Without	1NO+1NC	(1)	NO	•	_	-
	*1	(2)	NC	_	_	•
	1NO+1NC	(1)	NO	_	_	•
	*2	(2)	NC	•	_	
	2NO+2NC	(1)	NO	•	_	_
	*3	(2)	NC	-	_	•
		(3)	NO	•	-	-
		(4)	NC	-		•
With	1NO+1NC	(1)	NC	-	_	•
	*1	(2)	NO	•	_	_
	1NO+1NC	(1)	NC	•	_	-
	*2	(2)	NO	-	_	•
	2NO+2NC	(1)	NC	-	_	•
	*3	(2)	NC	-	_	•
		(3)	NO	•	_	-
		(4)	NO	•	_	_

Notes: *1: AR30PL-3, 6 *3: AR30PL-3 *2: AR30PL-7


● : Contact closed, -: Contact open

Position of contact block

Without transformer



With transformer





■ Pilot lights/sta	andard
--------------------	--------

■ Pilot lights/standard	1	T		T	
Lens	Transformer	LED lamp Lamp voltage	Туре	Incandescent lamp Lamp voltage	Туре
Dome	Without	6V AC 6V DC 12V AC/DC 24V AC/DC	DR30D0L-A3□ DR30D0L-63□ DR30D0L-B3□ DR30D0L-E3□	5.5V AC/DC 15V AC/DC 24V AC/DC	DR30D0L-54□ DR30D0L-C4□ DR30D0L-E4□
AF95-18	With	100–110V AC 200–220V AC	DR30D0L-H3□ DR30D0L-M3□	100–110V AC 200–220V AC	DR30D0L-H4□ DR30D0L-M4□
Dome AF97-674	With resistor	50V DC 110V DC 220V DC	DR30D0L-FR□ DR30D0L-HR□ DR30D0L-MR□	50V DC	DR30D0L-FQ□ - -
Dome AF97-672	With resistor		= ~	110V DC 220V DC	DR30D0L-HQ□ DR30D0L-MQ□
Extended round	Without	6V AC 6V DC	DR30E3L-A3□ DR30E3L-63□	5.5V AC/DC	DR30E3L-54□
		12V AC/DC 24V AC/DC	DR30E3L-B3□ DR30E3L-E3□	15V AC/DC 24V AC/DC	DR30E3L-C4□ DR30E3L-E4□
AF95-20	With	100–110V AC 200–220V AC	DR30E3L-H3□ DR30E3L-M3□	100–110V AC 200–220V AC	DR30E3L-H4□ DR30E3L-M4□
Faceted	Without	6V AC 6V DC 12V AC/DC 24V AC/DC	DR30K0L-A3□ DR30K0L-63□ DR30K0L-B3□ DR30K0L-E3□	5.5V AC/DC — 15V AC/DC 24V AC/DC	DR30K0L-54□ DR30K0L-C4□ DR30K0L-E4□
AF95-19	With	100–110V AC 200–220V AC	DR30K0L-H3□ DR30K0L-M3□	100–110V AC 200–220V AC	DR30K0L-H4□ DR30K0L-M4□
Faceted AF97-673	With resistor	50V DC 110V DC 220V DC	DR30K0L-FR□ DR30K0L-HR□ DR30K0L-MR□	50V DC 	DR30K0L-FQ□ - -
Faceted AF97-671	With resistor	=	Ξ	110V DC 220V DC	DR30K0L-HQ□ DR30K0L-MQ□
Dome with dimmer contro	Without	6V AC 6V DC 12V AC/DC 15V AC/DC 24V AC/DC	DR30D1L-A3□ DR30D1L-63□ DR30D1L-B3□ DR30D1L-C3□ DR30D1L-E3□	5.5V AC/DC — — 15V AC/DC 24V AC/DC	DR30D1L-54□ DR30D1L-C4□ DR30D1L-E4□
KK02-144A	With	100V-110V AC 200V-220V AC	DR30D1L-H3□ DR30D1L-M3□	100V–110V AC 200V–220V AC	DR30D1L-H4□ DR30D1L-M4□

Note: ☐ See page 88

Pilot Lights DR30

■ Pilot lights/short-body with transformer

Lens	LED lamp Lamp voltage	Туре	Incandescent la Lamp voltage	атр Туре
Dome KK02-141A	100–110V AC 200–220V AC 115–127V AC	DR30D0L-H9□ DR30D0L-M9□ DR30D0L-L9□	100–110V AC 200–220V AC 115–127V AC	DR30D0L-H8□ DR30D0L-M8□ DR30D0L-L8□
Extended round KK02-142A	100–110V AC 200–220V AC 115–127V AC	DR30E3L-H9□ DR30E3L-M9□ DR30E0L-L9□	100–110V AC 200–220V AC 115–127V AC	DR30E3L-H8□ DR30E3L-M8□ DR30E0L-L8□
Faceted KK02-143A	100–110V AC 200–220V AC 115–127V AC	DR30K0L-H9□ DR30K0L-M9□ DR30K0L-L9□	100–110V AC 200–220V AC 115–127V AC	DR30K0L-H8□ DR30K0L-M8□ DR30K0L-L8□

· Lens color

Replace the \square mark by the following lens color code

Color	Green	Red	White	Blue	Yellow	Orange
Code	G	R	W	S	Υ	Α

• Lamp voltage Available lamp voltage are as follow.

Description	Voltage	Code		Code	
		Standard type		Short-body type	
		LED	Incandescent	LED	Incandescent
Without transformer	5.5V AC/DC	_	54	-	_
	6V AC	A3	_	-	_
	6V DC	63	_	_	_
	12V AC/DC	B3	_	_	_
	15V AC/DC	C3	C4	_	_
	20V AC/DC	_	D4	-	_
	24V AC/DC	E3	E4	-	_
With transformer	100-110V AC	H3	H4	H9	H8
	115-127V AC	L3	L4	L9	L8
	200-220V AC	M3	M4	M9	M8
	230-254V AC	Q3	Q4	-	_
	350-380V AC	S3	S4	_	_
	400-440V AC	T3	T4	_	_
	480V AC	V3	V4	-	_
	500-550V AC	W3	W4	-	_
With resistor unit	110V DC	H7	_	-	_
With resistor	50V DC	FR	FQ	_	_
	110V DC	HR	HQ	-	_
	220V DC	MR	MQ	-	_



■ Pilot lights/standard

Lens	Transformer	LED unit Lamp voltage	Туре	Incandescent lamp Lamp voltage	Туре
Flush square (34mm sq. transparent lens)	Without	6V DC 15V AC/DC 24V AC/DC	DR30F4M-65□ DR30F4M-C5□ DR30F4M-E5□	5.5V AC/DC 15V AC/DC 24V AC/DC	DR30F4M-54□ DR30F4M-C4□ DR30F4M-E4□
AF97-65	With	100–110V AC 200–220V AC	DR30F4M-H5□ DR30F4M-M5□	100-110V AC 200-220V AC	DR30F4M-H4□ DR30F4M-M4□
Flush rectangular (Transparent lens)	Without	6V DC 15V AC/DC 24V AC/DC	DR30F4N-65□ DR30F4N-C5□ DR30F4N-E5□	5.5V AC/DC 15V AC/DC 24V AC/DC	DR30F4N-54□ DR30F4N-C4□ DR30F4N-E4□
AF97-61	With	100–110V AC 200–220V AC	DR30F4N-H5□ DR30F4N-M5□	100-110V AC 200-220V AC	DR30F4N-H4□ DR30F4N-M4□
Flush square (40mm sq. transparent lens)	Without	6V DC 15V AC/DC 24V AC/DC	DR30M4M-65□ DR30M4M-C5□ DR30M4M-E5□	5.5V AC/DC 15V AC/DC 24V AC/DC	DR30M4M-54□ DR30M4M-C4□ DR30M4M-E4□
AF97-63	With	100-110V AC 200-220V AC	DR30M4M-H5□ DR30M4M-M5□	100–110V AC 200–220V AC	DR30M4M-H4□ DR30M4M-M4□

· Color plate

Replace the \square mark by the following color plate color code

Color	Green	Red	White	Blue*	Yellow	Orange
Code	G	R	W	S	Υ	Α

Note: * Incandescent lamp only

· Lamp voltage

Available lamp voltage are as follow.


Description	Voltage	Code	_
		Standard type	
		LED	Incandescent
Without transformer	5.5V AC/DC	_	54
	6V AC	A5	_
	6V DC	65	_
	12V AC	25	_
	12V AC/DC	B5	_
	15V AC/DC	C5	C4
	20V AC/DC	_	D4
	24V AC/DC	E5	E4
With transformer	100-110V AC	H5	H4
	115-127V AC	L5	L4
	200-220V AC	M5	M4
	230-254V AC	Q5	Q4
	350-380V AC	S5	S4
	400-440V AC	T5	T4
	480V AC	V5	V4
	500-550V AC	W5	W4
With resistor unit	110V DC	HE	_

Joy Stick Selector Switches **AR30**

■ Joy stick selector switches

Handle	Terminal	Operating directions	Contact	Туре	
			arrangement	Manual return	Spring return
Ball type without lock	Screw	^	1NO × 2	AR30A0N-A0A0B	AR30A5N-A0A0B
			1NO + 1NC × 2	AR30A0N-1010B	AR30A5N-1010B
		1	1NO × 4	AR30A0N-AAAAB	AR30A5N-AAAAB
		<>	1NO + 1NC × 4	AR30A0N-1111B	AR30A5N-1111B
	Solder/tab	^	1NO + 1NC × 2	AR30A0H-1010B	AR30A5H-1010B
0			2NO + 2NC × 2	AR30A0H-2020B	AR30A5H-2020B
		^	1NO + 1NC × 4	AR30A0H-1111B	AR30A5H-1111B
AF97-48		\longleftrightarrow	2NO + 2NC × 4	AR30A0H-2222B	AR30A5H-2222B
Ball type with lock	Screw	<u> </u>	1NO × 2	AR30A1N-A0A0B	AR30A6N-A0A0B
			1NO + 1NC × 2	AR30A1N-1010B	AR30A6N-1010B
		<u> </u>	1NO × 4	AR30A1N-AAAAB	AR30A6N-AAAAB
		\longleftrightarrow	1NO + 1NC × 4	AR30A1N-1111B	AR30A6N-1111B
	Solder/tab	<u> </u>	1NO + 1NC × 2	AR30A1H-1010B	AR30A6H-1010B
0			2NO + 2NC × 2	AR30A1H-2020B	AR30A6H-2020B
		1	1NO + 1NC × 4	AR30A1H-1111B	AR30A6H-1111B
AF97-44		\longleftrightarrow	2NO + 2NC × 4	AR30A1H-2222B	AR30A6H-2222B
Rubber cap type	Screw	1	1NO × 2	AR30A2N-A0A0B	AR30A7N-A0A0B
without lock			1NO + 1NC × 2	AR30A2N-1010B	AR30A7N-1010B
		\uparrow	1NO × 4	AR30A2N-AAAAB	AR30A7N-AAAAB
		$\qquad \longleftrightarrow \qquad$	1NO + 1NC × 4	AR30A2N-1111B	AR30A7N-1111B
	Solder/tab	^	1NO + 1NC × 2	AR30A2H-1010B	AR30A7H-1010B
			2NO + 2NC × 2	AR30A2H-2020B	AR30A7H-2020B
		^	1NO + 1NC × 4	AR30A2H-1111B	AR30A7H-1111B
		\longleftrightarrow	2NO + 2NC × 4	AR30A2H-2222B	AR30A7H-2222B

- Operating direction
 Directions other than those shown in the table above can be provided.
 For types AR30A□N-①②③④ B, designate the contact arrangement codes for the necessary operating directions (①: Upper,②: Right,③: Lower,④: Left). Designate "0" for unnecessary directions.



· Contact arrangement

Contact arrangement		_	1NO	1NC	1NO+1NC	2NO	2NC	2NO+2NC
Manual return Spring return	Screw Solder/Tab	0	A _	B -	1	D -	E _	2

[•] Spring/manual return are also available, contact FUJI .



■ Buzzers

Sound	Description	Transformer	Operating voltage	Туре
Electronic sound	• LED operation indicator (Red)	Without	6V AC	DR30B5-AB
	Intermittent/continuous sound selection		6V DC	DR30B5-6B
4/4			12 to 24V AC/DC	DR30B5-EB
	• Sound level: 90dB (0.1m) 70dB (1m)		35 to 48V AC/DC	DR30B5-FB
	70dB (1111)	With	100 to 110V AC	DR30B5-HB
			200 to 220V AC	DR30B5-MB
AF96-381		With resistor unit	100 to 110V DC	DR30B5-1B
Electronic sound	Sound level: 90dB (0.1m)	Without	6V DC	DR30B6-6B
(economy)	70dB (1m)		24V AC	DR30B6-GB
1 E			24V DC	DR30B6-EB
		With	100 to 110V AC	DR30B6-HB
KK02-145A			200 to 220V AC	DR30B6-MB
Magnetic sound	Sound level: 90dB (0.1m)	Without	100 to 110V AC	DR30B0-HB
AF96-378	70dB (1m)	Č	200 to 220V AC	DR30B0-MB
Electronic sound (IP54)	Intermittent/continuous sound	Without	6V AC	DR30B8-AB
	selection		6V DC	DR30B8-6B
	Sound level: 80dB (0.1m)		12 to 24V AC/DC	DR30B8-EB
	60dB (1m)		35 to 48V AC/DC	DR30B8-FB
		With	100 to 110V AC	DR30B8-HB
115			200 to 220V AC	DR30B8-MB
AF96-245		With resistor unit	100 to 110V DC	DR30B8-1B

Notes: • Intermittent/continuous sound selection (DR30B5, B8)
See the "Short-circuit terminal" in the dimensions diagram on the 102.
page, and select as follows:
• Short-circuit terminal mounted → Intermittent sound
• Short-circuit terminal not mounted → Continuous sound




AR30 and DR30 Dimensions


- **■** Dimensions, mm
- Illuminated pushbuttons

Extended


With transformer




Without transformer

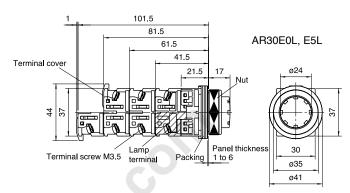


Extended with transparent full guard (24mm dia.)



Extended with full guard (24mm dia. with openings)



Extended with full guard (24mm dia.)

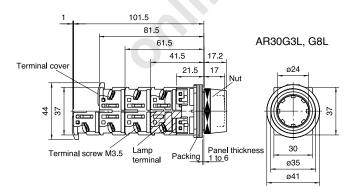

Note: *1 Except for the types 110V AC, 127V AC and 220V AC.




Pushbuttons/Selectors/Pilot Lights/Buzzers AR30 and DR30 Dimensions

■ Dimensions, mm


• Illuminated pushbuttons

Push-lock, turn-reset (40mm dia. with white arrow)


With transformer




Without transformer



Push-pullWith transformer



Without transformer



Note: *1 Except for the types 110V AC, 127V AC and 220V AC.

AR30 and DR30 Dimensions


■ Dimensions, mm

Pushbuttons


Flush/Extended


AR30F0R, F5R, FAR, FBR, E0R, E5R, EAR, EBR Terminal cover 41.5 17(Extended) 21.5 11.5(Flush) Packing Panel thickness 035 041

Mushroom (40mm dia.)




Mushroom (29mm dia.)







Extended with full guard (24mm dia.)

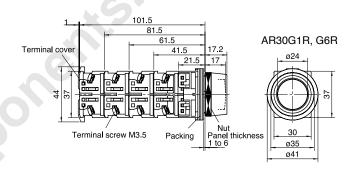

Extended with half guard

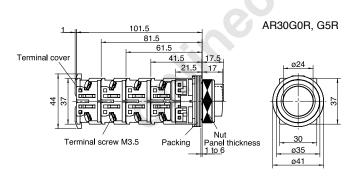


Pin lock




The enclosed pin can be inserted to lock the pushbutton in a pushed or not pushed state.

Mushroom with full guard (40mm dia.)



Mushroom with full guard (35mm dia. metal nut)






Pushbuttons/Selectors/Pilot Lights/Buzzers AR30 and DR30


Dimensions

- **■** Dimensions, mm
- Pushbuttons


Giant




Giant with guard




Giant with full guard




Giant with full guard

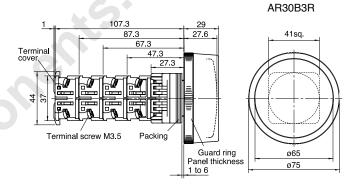

Pushbutton with selector ring (2-position)




Push, turn-lock




When the push button is pressed in the left position, it resets

automatically (momentary operation). When pressed and turned to the right it locks, and to the left it resets.

Push-lock, turn-reset (40mm dia. with white arrow)



Emergency operating cap



This is pushbutton switch is operated while holding the cap with the fingertips. The cap (AHX539-1) can be exchanged.

Online components.com

Pushbuttons/Selectors/Pilot Lights/Buzzers

AR30 and DR30 Dimensions

■ Dimensions, mm

• Emergency stop pushbuttons


Push-lock, turn-reset (40mm dia.)

1 61.5 AR30V0R, V2R Terminal cover 21.5 29.5 28.5 018


Panel thickness

Note: * AR30V2R type

Push-lock, turn-reset (65mm dia. with white allow)

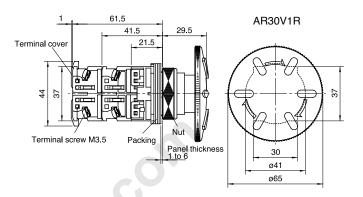


Push-lock, pull-reset (35mm dia.)




• Emergency stop illuminated pushbuttons

Push-lock, turn-reset (40mm dia.)


With transformer






30

Without transformer





Notes:

- *1 Except for the types 110V AC, 127V AC and 220V AC.
- *2 AR30V2L type




Pushbuttons/Selectors/Pilot Lights/Buzzers AR30 and DR30 Dimensions


■ Dimensions, mm

Selector switches

Knob Lever

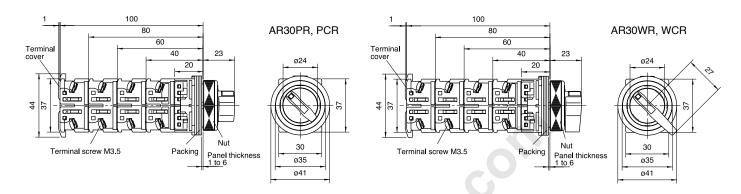


Key

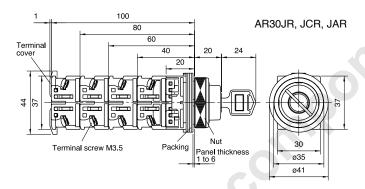

• Illuminated selector switches

Knob

With transformer

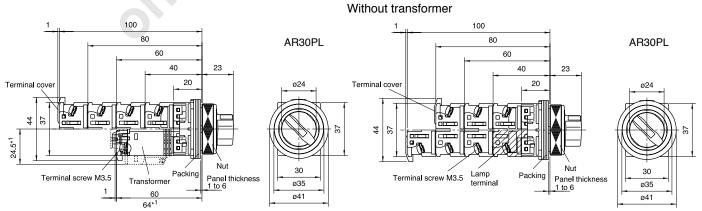

Notes: *1 Except for the types 110V AC, 127V AC and 220V AC.


AR30 and DR30 Dimensions

■ Dimensions, mm


Pilot lights


Dome

With transformer, with resistor unit




Without transformer







With resistor LED, incandecent (50V DC)




With resistor Incandescent (110, 220V DC)








Short-body / with transformer




DR30D0L




Extended

With transformer, with resistor unit




Without transformer



DR30E3L

Short-body / with transformer



Notes:

- *1 Except for the types 110V AC, 127V AC and 220V AC.
- *2 Incandecent (50V DC) type only




AR30 and DR30 Dimensions

■ Dimensions, mm


Pilot lights


Faceted

With transformer, with resistor unit




Without transformer







With resistor LED, incandescent (50V DC)




With resistor LED, incandescent (110, 220V DC)







Short-body / with transformer



Dome with dimmer control



DR30D1L



- Notes: *1 Except for the types 110V AC, 127V AC and 220V AC.
 - *2 Incandecent (50V DC) type only
 - *3 With transformer, with resistor unit type only
 - *4 For without transformer types, add 1 mm when mounting the terminal cover.




AR30 and DR30 **Dimensions**

■ Dimensions, mm


Pilot lights

Flush square (34mm sq. transparent lens)

With transformer, with resistor unit




Without transformer Nut Terminal cover Terminal screw M3.5 Legend plate Panel thickness





Flush rectangular (Transparent lens)

With transformer, with resistor unit




Without transformer







Flush square (40mm sq. transparent lens)

With transformer, with resistor unit



Without transformer






Note: *1 Except for the types 110V AC, 127V AC and 220V AC.

■ Dimensions, mm

• Joy stick selector switches


Ball type (without lock)

AR30A0N, A5N: Screw terminal

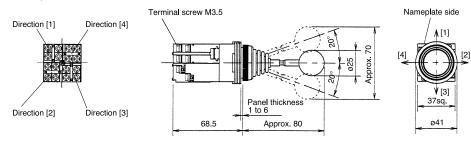

Ball type with lock

AR30A1N, A6N: Screw terminal

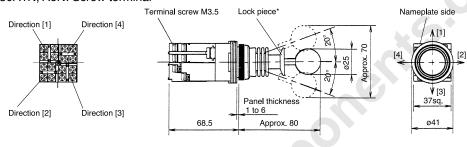


Notes * The contact arrangement is operable in the designated direction by pulling the lock piece in the central position with the fingers. The lock piece will return automatically and locks when the lock piece is released in the central position.


The lock piece locks in the central position only.

Rubber cap type (without lock)

AR30A2N, A7N: Screw terminal

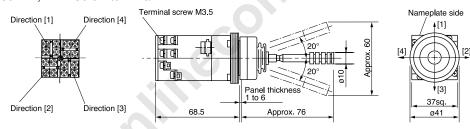

Solder/tab terminal: AR30A□H






AR30 and DR30 Dimensions


■ Dimensions, mm

Buzzers


Electronic sound


With transformer






DR30B5, B6






Magnetic sound




Electronic sound (IP54)

With transformer



Without transformer



- Notes: *1 There are no short-circuit terminals with DR30B6. (Continuous sound only)
 - *2 There are no LED lamps with DR30B6.
 - *3 The nut and cap are united with DR30B8.




Pushbuttons/Selectors/Pilot Lights AR30 and DR30 Notes on use

Notes on use

■ Panel cutout hole

Fig. 1 Panel cutout hole dimensions, mm




Note: If key-washer or legend plate are not used, 4.8mm-wide. location holes shown in Fig. 1 need not be cutout.

■ Mounting operator to panel

1. Pushbutton with a round bezel (ordinary mounting) Insert the operator into the cutout hole from the back of the panel, and tighten the nut with the AHX001 wrench from the front of the panel to secure the operator as shown in Fig.2.

Fig. 2 Pushbutton with a round bezel



Note: Recommended tightening torque is from 1.5 to 2N·m.

2. AR30V0R, V0L, V2R, V2L, V5R, V5L

- (1) The button is removed after loosening the center button by inserting the end of the AR9A002 tightening wrench or the AR9A005 wrench (enclosed with pushbutton) into the holes in the center button and turning counterclockwise, as shown in Fig.3.
- (2) Attach the operator in the same manner as described in step 1.

Wrench
(AR9A005)

Wrench
(AR9A005)


Tighten

Holes in center button

The center button can be attached or removed using the C portion of the AR9A004 tightening wrench as well.

Insert the operator into the cutout hole from the back of the panel, and as shown in Fig.4, insert the pushbutton into the operator cylinder while aligning the grooves inside the pushbutton with the protrusions on the operator.


Fig. 4 Setting pushbutton to operator cylinder



3. AR30WR, WCR

Fig. 5

- (1) As shown in the following figure, insert the tip of a flathead screwdriver into the selector tip groove. Rotate the screwdriver in the direction indicated by the arrow until the selector tip rises, and draw out the knob.
- (2) Attach the operator in the same manner as described in step 1.
- (3) Insert the knob, with the selector tip in the floated state, into the original position of the rotation tube, and push the selector tip into place.



4. AR30M0R, M4R, M5R, B0R, Q7L


- (1) Loosen the button by hand.
- (2) Attach the operator in the same manner as described in step 1.
- (3) Screw in the button by hand, making sure that the button is screwed in all the way. (Recommended tightening torque: 0.3 to 0.5 N•m)



5. AR30M3R, M8R, B1R, B2R and B3R

The outer circumference of the nut is threaded, so be careful not to cut your hand on it.

- (1) Loosen and remove the guard ring by hand.
- (2) Loosen and remove the button and nut by hand.
- (3) Insert the operator into the cutout hole from the back of the panel, and tighten the nut to secure it in place. (Recommended tightening torque: 0.3 to 0.5 N·m)
- (4) Screw in the button by hand, making sure that it is screwed in all the way.
 - (Recommended tightening torque: 0.3 to 0.5 N·m)
- (5) Loosen and remove the guard ring by hand. (Recommended tightening torque: 1.5 to 2.5 N·m)






Pushbuttons/Selectors/Pilot Lights

AR30 and DR30 Notes on use

6. AR30N0R, V1R, Q2R

- (1) Loosen and remove the screw on the side of the button, taking care not to loosen the screw.
- (2) Attach the operator in the same manner as described in step 1.
- (3) Attach and secure the button in place with the screw, making sure that the head of the screw does not protrude from the side.
- (4) Recommended tightening torque: N0R, V1R 0.5 to 1.0N•m Q2R 0.3 to 0.5N•m


Fig. 8



7. AR30GSR

- (1) Insert the tips of the AR9A001 wrench into the indentations around the button center, and turn the wrench to loosen and remove the button.
- (2) Loosen and remove the guard ring by hand.
- (3) Insert the switch operator into the cutout hole from the back of the panel, and secure it with the guard ring from the front of the panel. (Recommended tightening torque: 1.5 to 2.5 N•m)
- (4) Attach and secure the button with the AR9A001 wrench. (Recommended tightening torque: 0.3 to 0.5 N·m)

Fig. 9




8. DR30F4M, F4N, M4M

Insert the pilot lights from the front of the panel and fix it with the AHX536 tightening wrench from the back of the panel.

- (1) Recommended tightening torque: 1 to 1.5N·m
- (2) For pilot lights with transformers and resistance units, remove the transformer or resistance unit in advance. (Fig.10)

Fig. 10




Mounting a 22mm-dia. command switch with a square button and a square bezel, or with a round button and a square bezel, to a panel cutout hole for a 30mm-dia. command switch using an adapter

As shown in Fig. 11, mount an adapter and packing onto a 22mm-dia. command switch (AR22, DR22 series) with a square button and a square bezel or one with a round button and a square bezel. Then, insert the switch operator into the panel cutout hole from the front of the panel. Use AR9A004 wrench section A to tighten the locking nut from behind the panel to secure the switch.

Use the adapter accessory nut for this purpose. Do not use the command switch accessory nut.

Fig. 11 Command switch with a square button and a square bezel, and command switch with a round button and a square bezel



Note: • Recommended tightening torque is from 1 to 1.5N•m.

Panel thickness: 2.5 to 5mm


This adapter can be used with the following 22mm-dia. Command switches:

- AR22F0M, F5M, E0M, E5M, F0P, F5P, E0P, E5P, M4P
- AR22F0S, F5S, E0S, E5S, F0Y, F5Y, E0Y, E5Y, M4Y
- · AR22PY, PCY, WY, WCY, RY, RCY, JY, JCY, PP
- DR22F3M, F4M, F5M, E3M, E3P

10. AR30S1R, S2R, S3R, S6R

- (1) Attach the operator in the same manner as described in step 1.
- (2) Attach the rosette assembly to the operator.
- (3) Pressing the rosette from the directions indicated by the arrows, insert the selector tip in the groove.
- (4) Make sure that the selector tip is inserted completely.
- (5) To remove the rosette, use a small flathead screwdriver to remove the selector tip as described in step 3, and then remove the rosette.

Fig. 12






Pushbuttons/Selectors/Pilot Lights AR30 and DR30 Notes on use

11. AR30A (joy stick selector)

- (1) Remove the clamp ring as shown in the following figure.
- (2) Attach the operator in the same manner as described in step 1. Note: Even if a lock type is used, remove the clamp ring in the same manner.

Fig. 13



■ Water-proof and dust-proof cap

Applicable type: Water-proof cap AHX052


Dust-proof cap AHX032, 033, 034

AHX113 AHX157

When attached to the panel in combination with a water-proof or dust-proof cap, the water-proof cap or dust-proof cap may sink downward and prevent the depressed button from returning to its original position.

As shown in the following figure, cut an approximately 5-mm air outlet in the portion of the ring packing touching the panel surface. Also, reduce the number of packing rings by one below the standard number. The clamp ring tightening torque is 1.5 to 2.5 N·m.

Fig. 14



Degree of protection

The water-proof cap or dust-proof cap seals the panel surface to provide IP65 protection.

■ Applicable panel thickness

The AR30/DR30 series switches are mountable to panels with the thickness given in the table below.

Switch mounting of	condition	Applicable panel thickness
Without accessori	es	1 to 6mm
With accessories AR9Y003 adapter		2.5 to 5mm

■ Using accessory ring-packings

Use the required number of ring-packings (1.6mm-thick, 4 pieces, resin mold).

Table below is a guideline for using the packings.

If a locking nut or legend plate is used, the thickness must be counted as an additional panel thickness.

Panel thickness vs. number of packings (reference data)

Effective panel thickness including lock-ring and legend plate thicknesses	Number of packings
1.0mm to less than 2.0mm	
2.0mm to less than 3.6mm	
3.6mm to less than 5.0mm	
5.0mm to less than 6.0mm	


■ Minimum mounting space, mm


The minimum mounting spaces required for AR30/DR30 command switches are given below. (Fig. 15)

Fig. 15

- · Illuminated pushbutton and pushbutton
- Emergency stop illuminated pushbutton and emergency stop pushbutton
- · Illuminated and non-illuminated selectors

Pilot light





Notes: *1 AR30M3R, M8R, GSR: 55mm *2 AR30B□R, GPR, V1R: 80mm

Туре	*3	*4
F4M	34	34
F4N (Vertical lengthwise mounting)	40	34
(Horizontal lengthwise mounting)	34	40
M4M	40	40
Pilot lights short-body with transformer	50	42
Pilot lights with resistor	80	42

Other items are the same as for the AR22 and DR22 series, see page 50 to 54.



Pushbuttons/Selectors/Pilot Lights

AR22/DR22 and AR30/DR30 Accessories

■ Accessories	
Description	Туре
Wrench	AR9A004 Dimensions, mm: 30 x 100 x 6.5
	A—C
6	Remarks Section "A" Use this section to tighten the nut for mounting the operator on a panel.
	Section "B" Use this section to tighten or remove the lens. Applicable type: AR22F0L, F5L, E0L, E5L, F0P, F5P, E0P, E5P AR22G1L, G2L, G4L, G6L, G7L, G9L DR22E3L, E3P AR30E0L, E5L, G2L, G3L, G4L, G7L, G8L, G9L DR30E3L
KK02-261	Section "C" Fit the tabs on the section "C" in the center button, and turn the wrench to tighten or remove the button. Applicable type: AR22V (except V4R, VG type) AR30V (except V1R type)
Wrench for AR22, DR22	AR9A701 Dimensions, mm: ø28 x 70
	Application: AR22, DR22 nut tightening
Wrench	AHX536 Dimensions, mm: ø32 x 76
	Application: DR30F4M, F4N, M4M, N1, N2 nut tightening
Wrench	AR9A001 Dimensions, mm: ø22 x 35
KK02-098A	Application: AR22, DR22 round-type lens tightening AR22E0M, E5M oil-proof cap tightening AR30, DR30 round-type lens tightening AR30GSR button tightening
Wrench (for center button)	AR9A002 Dimensions, mm: ø18 x 60
	Application: AR22V center button tightening (except V4R, VG type) AR30V center button tightening (except V1R type)
Wrench	AHX701 Dimensions, mm: Ø25 x 72.5
	Application: DR22N, AR22VG nut tightening

Description	Туре
Wrench (for center button)	AHX8003 Dimensions, mm: ø14 x 50
	Attaching and removing the center button of the AR22VGF type.
AF93-6	
Wrench for AR22,30 and DR22, 30 For ø30	AR9A006 Dimensions, mm: ø40 x 100
For ø22 AF96-241	To mount an AR22, 30 or DR22, 30 command switch to a panel, use this wrench to tighten the nut securely. It is very easy to fit this wrench onto the nut. The wrench with an inside rubber-lining can be easily used with either your right or left hand.
Wrench for AR30, DR30	AHX001 Dimensions, mm: ø47 x 100
	To mount an AR30 or DR30 command switch to a panel, use this wrench to tighten the nut securely.
AF95-467	
Special tool	AHX321 Dimensions, mm: 42 x 130 x 6.5 For all types except pilot lights
AHX321	DR9A321-T Dimensions, mm: 57 x 130 x 30 For pilot lights
SG-873	This tool is used to remove contact blocks and transformer units. The AHX321 can remove round color lens of switches.
DR9A321-T AF95-21	
Wrench/Lamp changer	AHX702 Dimensions, mm: ø36 x 55
SI-1030	Use this wrench to tighten or remove the lens and lamp. Used with: Lens of DR22D0L, K0L and DR30D0L, K0L Incandescent lamp of pilot lights and illuminated pushbuttons
Lamp changer	AHX790
For BA9S/13 lamp	Dimensions, mm: ø14 x 55

AF95-22

For E12/15 lamp

 Use this rubber wrench for mounting or removing lamps from pilot lights and illuminated pushbutton switches. • This wrench can be used for both LED and incandescent lamps.
• One end is for the BA9S/13 lamp, and the other is for the E12/15 lamp (for use with

30mm dia. pilot lights with resistor).

• For 30mm dia. pilot lights with resistor, this tool can also be used to attach or remove incandescent lamps.

AF03-5



Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30 Accessories

		-	
Description	Туре	Description	Туре
Protection cover	AR9E760 This cover protects against accidental operation. The cover lid is returned home with a spring force. (Packing is provided)	Key washer for AR22, DR22	AR9Y715 Use this metal washer when securing a operator in a 22.3mm dia. panel cutout hole. Dimensions, mm:
	Used with: AR22F0L, F5L, E0L, E5L, F0M, F5M, E0M, E5M, F0P, F5P, E0P, E5P AR22F0R, F5R, E0R, E5R, F0S, F5S, E0S, E5S, E0Y, E5Y, F0Y, F5Y, FAR, FBR, EAR, EBR Dimensions, mm:		9022.1 30 sq.
AF95-29	20.8		When the periphery of the panel cutout has a hole to stop rotation, use with side A contacting the panel (except for Joy stick selector types). Even when the periphery of the panel cutout does not have a hole to stop rotation, if used with side B contacting the panel it can serve as a washer for eliminating play (except for Joy stick
Cover for preventing operating errors with	AR9E538	AF95-25	selector types).
30mm dia. types	Inadvertent operation can be prevented by fitting a transparent cover with chain in the clamp ring.	Key washer for ø30	AHX082 Use this metal washer when securing an operator in a 30.5mm dia. panel cutout hole.
	Used with: AR30F0R, F5R, E0R, E5R, E0L, E5L		Dimension, mm:
	Dimensions, mm: o37.7 o34.7 24.5 Ring: o10 Length: Approx. 45mm	SC-1016	<u>030.2</u> 1 1.2
AF91-671	Clamp ring mounting portion Thickness: 1mm	Operator base cover	AR9Y002 Attach this cover to the operator base of a pushbutton switch with only one contact block (1NO or 1NC) to protect against dust.
Cover for preventing operating errors with	AHX408 This is a metallic cover for preventing	AF95-26	
30mm dia. types	inadvertent operation.	Adapter for	AR9Y718
	Used with: AR30F0R, F5R Dimensions, mm:	AR22, DR22	Use this resin adapter to mount the AR22/DR22 (switch/pilot light) in a 25.5mm dia. cutout hole on a panel.
	When attaching the cover to a vertical panel, if you attach it so that the portion indicated by an "A" is at the upper right, the stopper causes the cover to stop above the push button to halt further rotation.	.AF95-28	Dimensions, mm:
.AF93-420	The material is steel (zinc plated).		




Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30


Accessories

Description	Туре	Description	Туре
Adapter for AR22 and DR22	AR9Y008 Use this resin adapter to mount the AR22/DR22 (switch/pilot light) in a 25.5mm dia. cutout hole on a panel. Mounting, mm:	Round-frame adapter for 30mm dia. types	AR9Y004 By using this adapter in combination with the round type 22mm dia. command switch, the 22mm dia. command switch can be used as a 30mm dia. command switch/round frame type.
	Packing Operator Adapter Adapter Panel		Used with: AR22, DR22 round types (except for M3R, M8R,VG□, Joy stick selectors, buzzers)
	Panel cutout, mm: 04.5 = 0.2		Dimensions, mm Nut Packing Adapter
O	020.30	KK02-100A	1.3 4 0.5 2.5 11.9 Note: Panel thickness: 2.5 to 5mm
	Equipped with device for stopping rotation Used with: AR22, DR22 round head types (except for M3R, M8R, VG□, joy stick selectors and buzzers)	Round-frame adapter for 30mm dia. type VG	AHX958 Using this adapter in combination with model AR22VG (22mm dia.) allows mounting to a 30.5mm panel cutout hole. The attachment method is as follows.
AF98-198	Dimensions, mm: 033 025 022.3		The washer and nut (22.3mm dia.) originally attached to the operator will not be used, so remove them. Attach the 22mm dia. packing (included), the 30mm dia. adapter and the 30mm dia. packing to the operator in that order, and insert the operator into the cutout hole. From the back of the panel cutout hole, fasten the 30mm-dia. nut using the AHX701 wrench. The correct tightening
Adapter for AR30 and DR30	AR9Y003 Mount this adapter onto a 22mm dia. command switch with a square button and a square bezel to obtain a 30mm dia. command switch with a square/round button and a square bezel. A resin ring-packing and a nut are accessories of the adapter.		torque is 1 to 1.5 N•m. Terminal cover Nut for 30mm dia. *1 Packing for 30mm dia. *1 Adapter for 30mm dia. *1 Packing for 22mm dia. Operator
00	Dimensions, mm: A0 sq. 30 sq. Packing Adapter Packing Adapter Oct. Note: Panel thickness: 2.5 to 5mm	0	AR22 type number *1 Adapter for 30mm dia. (AHX958) Panel cutout, mm: ***ag30.5 ************************************
AF95-416	Note: 1 driet trickriess. 2.3 to smill		Dimensions, mm:
			Adapter for 30mm dia. 30mm dia. 30mm dia. 41 620.5
		AF93-4	Note: Panel thickness: 1 to 6mm



Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30 **Accessories**

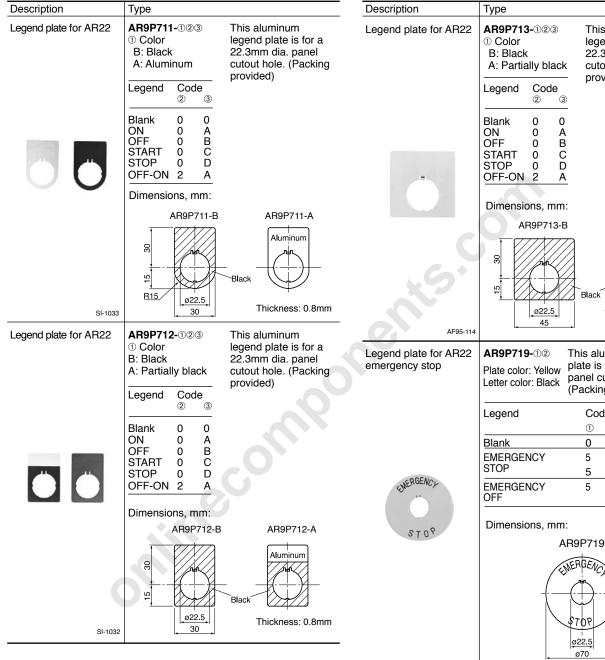



This aluminum legend plate is for a 22.3mm dia. panel cutout hole. (Packing provided)

Legend	Code		Letter
	1	2	hight
Blank	0	0	
EMERGENCY	5	Α	7mm
STOP	5	В	13mm
EMERGENCY OFF	5	С	13mm

MERGEN ø22.5

Thickness: 0.8mm


KK02-265/

Note: Engraving for making letters is not available.



Pushbuttons/Selectors/Pilot Lights

AR22/DR22 and AR30/DR30 Accessories

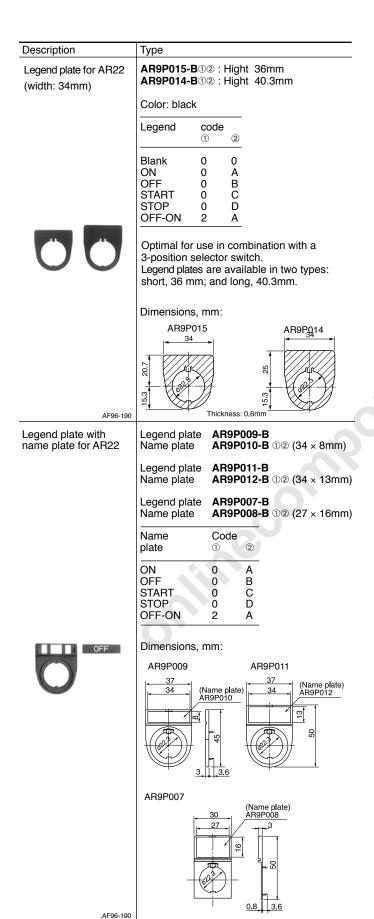

Description	Type			
Legend plate for AR30	AHX177 ① Mater color	7-1)234 ial and	This legen for a 30.5r panel cuto	nm dia.
	Code	Material	Color	
	S B A	Brass Aluminum	Silver Black Aluminum	
	1			




② SizeH: StandardS: Short size

Legend	Code ③	4	
Blank ON OFF START STOP OFF-ON	0 0 0 0 0	0 A B C D A	



AF89-466

Dimensions, mm: AHX177



AF87-49

Legend plate for AR30 emergency stop

AHX720-112


This aluminum legend plate is for a 30.5mm dia. panel cutout hole.

Plate color: Yellow Letter color: Black

Legend	Code		Letter
	1	2	hight
Blank	0	0	-
EMERGENCY STOP	5	Α	7mm



Dimensions, mm:




SK-200

Note: Engraving for making letters is not available.



Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30 Accessories

Description	Туре	
Panel plug for AR22 and DR22	Round: AHX725-B AHX725-H	Black Gray
	Square: AHX726-B AHX726-H	Black Gray
40	2	929.5 x 17 (AHX725) 9.5 sq. x 17 (AHX726) ver up unused panel
SI-1027	cutout holes. For oil proof usage	
Panel plug for AR30 and DR30	AHX004	
2.10	Color: Silver (metal This plug is used to cutout hole.) cover up unused panel
	Dimensions, mm:	
	Panel plug	Packing M5 M5 M5 M6 M5 M6 M5 M6 M6 M7 M6 M7 M6 M7
T-1993		

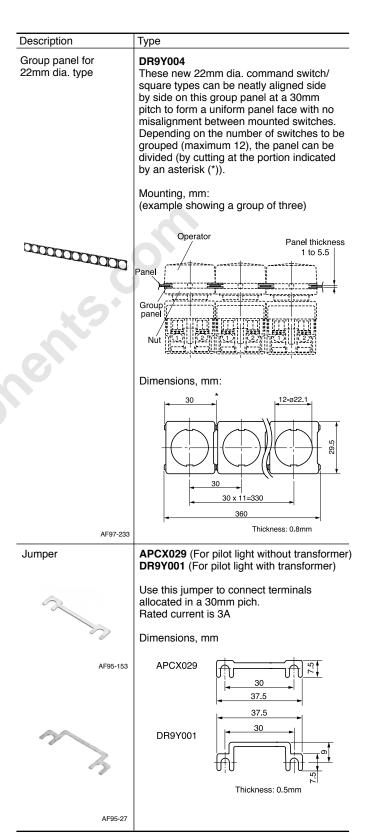



Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30

AR22/DR22 and AR30/DR30 Accessories

Description	Туре	Description	Туре
Lens for illuminated	Type Used with	Center button	Town and Linear with
pushbutton switch	AR9C011-□*¹ AR22F0L, F5L, F0P, F5P	(For V type)	Type Used with
and pilot lights		(. 5. 1 1) (5.	AR9C020-R AR22V0R, V2R, VSR
. 3	AR9C012-		AR30V0R, V2R
	AR22G1L, G2L, G4L, G6L, G7L, G9L		AR9C020- □ AR22V5R, AR30V5R
	DR22E3L, E3P		AR9C018-R AR22V0L, V2L, VDL, VAL, VSL
	AR30E0L, E5L, G2L, G3L, G4L, G7L, G8L, G9L	E	AR30V0L, V2L
	DR30E3L		AR9C018-□ AR22V5L*, AR30V5L*
	AR9C013- □*¹ AR22F0M, F5M		,
	AR9C014- □*¹ AR22E0M, E5M		
	DR22E3M, F5M		
	AR9C015-□ AR22M4L, M4P		Replace the \square mark by the button color code
d)	AR9C016-□ AR22M0L, M5L		Color Red Black Yellow
	DR9C001-□ DR22D0L		Code R B Y
	DR30D0L*2		Note: * V5L: Red and yellow only
	DR9C002- DR22K0L		, , , , , , , , , , , , , , , , , , , ,
	DR30K0L*2	AF95-32	
	DR9C120-C DR30M4M	Push-lock, turn-reset	Type Used with
	DR9C121-C DR30F4N	button	
	DR9C122-C DR30F4M	(V and Q types)	AR9C008-R AR22V4R
	DR9C126-□*¹ DR22F3M	(Valid & typos)	AR9C010-R AR22Q2R, AR30Q2R
	DR9C126-C DR22F4M		AR9C017-R AR22V2R, V2L, AR30V2R, V2L
	DR9C127-□*1 DR22E3N		AR9C019-R AR22VAL
v = 4			AR9C021-R AR22V0R, V0L, AR30V0R, V0L
	Replace the ☐ mark by the lens color code		AR9C021- □ AR22V5R, V5L*, AR30V5R, V5L*
	Color Green Red Clear Yellow		
	Code G R C Y		AR9C026-R AR22VDL
	Code d		AR9C029-R AR30V1R
	Color Orange Blue White		AR9C040-R AR22VSR, VSL
	Code A S W		
		AFOE OA	Replace the mark by the button color code
	Notes:*1 When the main unit code is "W" (white),	AF95-31	Color Red Black Yellow
AF94-458	use a lens of clear color. *2 Except for pilot lights with resistor		Code R B Y
			Note: * V5L: Red and yellow only
Button for pushbutton	Type Used with	1	
switch	AR9C001- □ AR22F0R, F5R, F0Y, F5Y, G2R, G7R	KK02-104A	
	AR30F0R, F5R, FVR		
	AR22S1R, S2R, S3R, S6R	Knob	Type Used with
	AR30S1R, S2R, S3R, S6R		AR9M006-□ AR22PR, PCR, PY, PCY
	AR9C003- □ AR22E0R, E5R, G0R, G3R, G5R, G8R		AR30PR, PCR
	AR22E0Y, E5Y		
	AR30E0R, E5R, G0R, G1R, G5R, G6R		
	AR9C004-□ AR22F0S, F5S		Replace the \square mark by the knob color code
	AR9C005-□ AR22E0S, E5S		Color Black Green Red
1000	AR9C006- □ AR22M4R, M9R, M4Y		Code B G R
	AR30M4R	AF95-43	<u> </u>
	AR9C007-□ AR22M0R, M5R	Lever	Type Used with
		20101	
	AR30M0R, M3R, M5R, M8R		AR9M007-□ AR22WR, WCR, WY, WCY
AF94-461	AR9C024- □ AR30B0R, B1R, B2R, B3R		AR30WR, WCR
	ARSUZI-C ARZZFAR, FBR, ARSUFAR, FBR		
	AR9C028-C AR22EAR, EBR, AR30EAR, EBR		Replace the \square mark by the lever color code
	AR9C041-R AR30N0R		
	AHX539-1 Cap for AR30FVR	•	
KK02-101A			Code B G R
		AF95-42	
	Replace the ☐ mark by the button color code	Cylindrical knob	Time Head with
		5,a	Type Used with
	Color Green Red Black White	_	AR9M008-□ AR22RR, RCR, RY, RCY
KK02-102A	Code G R B W		
TATOL TOLK	Color Yellow Orange Blue	In the second	Banks at the Daniel Control of the C
	Code Y A S		Replace the mark by the knob color code
	Oue I A 3	A D D	Color Black Green Red
		- _	Code B G R
KK02-103A		AF95-44	
	1		·



Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30 Accessories

Description	Туре
Knob	Type Used with
(for illuminated	AR9M005-□ AR22PL, PP
selector switch)	AR30PL
	Replace the \square mark by the knob color code
	Color Green Red White
	Code G R W
	Color Yellow Orange Blue
AF94-465	Code Y A S
Key	Type Used with
	AR9C022-□ AR22JR, JCR, AR30JR, JCR,
	AR9C025-□ AR22JAR, AR30JAR
B 2	
1100	Replace the ☐ mark by the key type code.
200	Code: A, B, C, D, E or F, 6 types.
AF94-464	
Legend plate	AR9P001-W
Legend plate (for F type with round	
Legend plate	This part is made of acrylic resin.
Legend plate (for F type with round	This part is made of acrylic resin. Use paint or thinner compatible with resin.
Legend plate (for F type with round	This part is made of acrylic resin.
Legend plate (for F type with round	This part is made of acrylic resin. Use paint or thinner compatible with resin.
Legend plate (for F type with round	This part is made of acrylic resin. Use paint or thinner compatible with resin.
Legend plate (for F type with round	This part is made of acrylic resin. Use paint or thinner compatible with resin.
Legend plate (for F type with round bezel) AF94-459 Legend plate	This part is made of acrylic resin. Use paint or thinner compatible with resin.
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: ø17.8 x 0.9 AR9P002-W
Legend plate (for F type with round bezel) AF94-459 Legend plate	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: ø17.8 x 0.9
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin.
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin.
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin.
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin.
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin.
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round bezel)	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin.
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round bezel) AF94-459	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø19.7 x 4.2
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round bezel) AF94-459	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø19.7 x 4.2
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round bezel) AF94-459	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø19.7 x 4.2 Type Used with AR9P019-
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round bezel) AF94-459	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø19.7 x 4.2 Type Used with AR9P019-□ ■ AR22FAR, FBR, AR30FAR, FBR AR9P020-□ ■ AR22EAR, EBR, AR30EAR, EBR
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round bezel) AF94-459	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø19.7 x 4.2 Type Used with AR9P019-□ ■ AR22FAR, FBR, AR30FAR, FBR AR9P020-□ ■ AR22EAR, EBR, AR30EAR, EBR
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round bezel) AF94-459	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø19.7 x 4.2 Type Used with AR9P019- AR22FAR, FBR, AR30FAR, FBR AR9P020- AR22EAR, EBR, AR30EAR, EBR BYMBOLO I DELETED IN TO Plate W B W B W B Clear Symbol Red Green Green Black
Legend plate (for F type with round bezel) AF94-459 Legend plate (for E type with round bezel) AF94-459	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø17.8 x 0.9 AR9P002-W This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: Ø19.7 x 4.2 Type Used with AR9P019- AR22FAR, FBR, AR30FAR, FBR AR9P020- AR22EAR, EBR, AR30EAR, EBR Bymbol I

Description	Туре
	Legend plate
Legend plate and color plate	Type Used with
(for F type with square	DR9P241-W AR22F0M, F5M
bezel)	DR22F3M, F4M
	DR9P242-WP DR30M4M
	DR9P242-W DR30M4M, LED(W)
	DR9P243-WP DR30F4N
AF94-460	DR9P243-W DR30F4N, LED(W)
AF94-400	DR9P244-WP DR30F4M
	DR9P244-W DR30F4M, LED(W)
	Types DR9P242, 243 and 244-W are LED illuminated, and used exclusively with operators having a "W" in the type number.
	• color plate
KK02-105A	Type Used with
	DR9P241-□ DR22F3M, F4M
	DR9P242-□ DR30M4M
	DR9P243-□ DR30F4N
	DR9P244- □ DR30F4M
KK02-106A	Replace the □ mark by the color code
	Color Green Red White
	Code G R W
	Codo V A S
	Code Y A S
KK02-107A	This part is made of acrylic resin. Use paint or thinner compatible with resin. Dimensions, mm: DR9P241: 20.8 sq. x 0.8 DR9P242: 33.4 sq. x 1 DR9P243: 33.4 x 27.4 x 1 DR9P244: 27.4 sq. x 1
Legend plate	Type Used with
(for E type with square	AR9P003-W AR22E0M, E5M
bezel)	DR22F5M, E3M
	DR9P001-W DR22E3N
	
AF94-460	This part is made of acrylic resin. Use paint or thinner compatible with resin.
	Dimensions, mm: AR9P003-W: 20 sq. x 4.8 DR9P001-W: 19.7 x 26.7 x 4.5
AF94-460	
Legend sheet	AHX727
	Affix this seal to the DR9P241-□/AR9P003 legend plate for marking or labeling.
	Dimensions, mm: 20 sq. x 0.025
AF95-34	



Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30

Accessories

Description	Type			
LED lamp	Туре	Lam	o voltage	
	APX510-6 APX510-D6 APX510-12 [APX510-15 [APX510-24 [□ 6V □ □ 12V □ □ 15V □	-	
	Replace the code	□ mark by	the lumir	ous color
	Luminous color	Yellow	Red	Green
	Code	Υ	R	G
	Lens color	Υ	R	G
	Luminous color	Amber	Orange	Blue
	Code	Α	0	S
	Lens color	Α	W, A*	S
	* Orange is available only for the DR22F4M pilot light.			
	Dimensions, mm:			
	8			
KK02-109A	<u> </u>	<i>U</i>	Lamp base: I	BA9s/13
LED lamp (for DR30 with resistor)	Туре	Lamp	voltage	
(101 D1100 WILLI 10313101)	APX507-24	□ 24V A	AC/DC	

Note:


The symbol in the box indicates the color of light emitted. (See note APX510.)
When the code is "W" (white), use an LED lamp ((APX.509-240)

Dimensions, mm:

APX509-240



KK02-110A




LED lamp (for AR22VGF type)



Type Lamp voltage AR9L002-ER 24V AC/DC

Luminous color: Red

Dimensions, mm:



KK02-109A


Seat (gold plated) Lamp base: BA9s/13
t use the LED lamp for other types.

Description Neon lamp (for AR22VGF type)

Туре	Lamp voltage
AR9N001-HA	110V AC
AR9N001-KA	120V AC
AR9N001-MA	220V AC
AR9N001-PA	240V AC

Luminous color: Orange

Type



Lamp base: BA9s/13 Do not use the LED lamp for other types.

LED unit for DR30 (square type)

	Туре	Lamp voltage	Used with
1	DR9Q001-6 □	6V DC	DR30M4M
4	DR9Q001-2 □	12V AC	
	DR9Q001-B □	12V AC/DC	
	DR9Q001-E □	24V AC/DC	
	DR9Q002-6 □	6V DC	DR30F4N
	DR9Q002-2 □	12V AC	
	DR9Q002-B □	12V AC/DC	
	DR9Q002-E □	24V AC/DC	
	DR9Q003-6 □	6V DC	DR30F4M
	DR9Q003-2 □	12V AC	
	DR9Q003-B □	12V AC/DC	
	DR9Q003-E □	24V AC/DC	

Replace the \square mark by the luminous color

R

R

Yellow Red

G, Y

KK02-112A

.KK02-113A

KK03-038




code


color Code

Luminous

Lens color



Dimensions, mm:



О

W


Orange Amber

A

Α



DR9Q002-□□	
34.5	30 ▶
	T (Dankers)
	↓








Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30 **Accessories**

	•				
Description	Туре				
Incandescent lamp	Туре	Lamp voltage	Rated voltage, consumption		
	AHX135	5.5V AC/DC	6.3V AC/DC, 1W		
	AHX279	15V AC/DC	18V AC/DC, 1W		
	AHX144	20V AC/DC	24V AC/DC, 1W		
	AHX129	24V AC/DC	30V AC/DC, 1W		
	Dimensions,	mm:			
		e) –		
		20			
		Lamp base: BA	.l .9s/13		
AF89-427	-				
Incandescent lamp (for DR30 with	Туре	Lamp voltage	Rated voltage, consumption		
resistor)	AHX130	15V AC/DC	18V AC/DC, 2W		
	Dimensions, mm:				
	4	1000 H			
12	910	·			
		₹ 34			
		Lamp base: E	12/15		
KK02-115A					
Contact block (1NO)	AR9B290 AR9B290-S	Standard Overlap			
A CONTRACTOR OF THE PARTY OF TH		3.3.Mp			
William !	Color: Blue Dimensions	, mm: 19.3 x 29	x 27		
AF94-455	Note: Termina	al cover is not sup	plied with this.		
Contact block (1NC)	AR9B291 AR9B291-S	Standard Overlap			
	Color: Red Dimensions	, mm: 19.3 x 29	x 27		
AF94-455	Note: Termina	al cover is not sup	plied with this.		
Lamp terminal	AR9B292				
Ale Ale	Color: Black Dimensions	; , mm: 19.3 x 29	x 27		
AF94-456	Note: Termina	al cover is not sup	plied with this.		

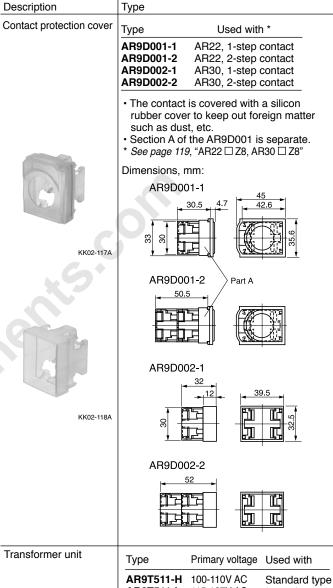





AR9T511-L 115-127V AC (except buzzers) AR9T511-M 200-220V AC AR9T511-Q 230-254V AC AR9T511-S 350-380V AC AR9T511-T 400-440V AC **AR9T511-V** 480V AC AR9T511-W 500-550V AC DR30F4N, F4M, AR9T557-H 100-110V AC AR9T557-L 115-127V AC M4M AR9T557-M 200-220V AC AR9T557-Q 230-254V AC AR9T557-S 350-380V AC AR9T557-T 400-440V AC **AR9T557-V** 480V AC AR9T557-W 500-550V AC



Dimensions,	mm:
Jp to 220 V	22.4 x 30 x 45
Over 220 V	25.3 x 29 x 48

Note: With terminal cover

AF95-33

AF94-457



Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30

Accessories

Description	Туре	Description	Туре
Base unit for	AR9T003	Nut for 30mm dia. types	AR9R001:Resin, black (standard)
transformer separate mounting	Use this base in combination with a transformer unit. This base unit can be mounted using screws or rails. Dimensions, mm	(Resin types are black, metallic types are silver.)	AHX088: Metallic, silver Used with: AR30F0R, F5R, FAR, FBR, E0R, E5R, EAR, EBR, E0L, E5L, Q7L DR30D0L, E3L, K0L
	(Y2) 48 2-ø4.5 (Y1) Terminal screw M3.5 Terminal cover Transformer unit (ontional) %	KK2-120A	AR9R002: Resin, black (standard) AHX093: Metallic, silver Used with: AR30M0R, M5R, M4R, G0R, G5R, N0R, S □R, V□R, Q2R, V□L, PR, PCR, WR, WCR, JR, JCR, JAR, PL, A□N, A□H
KK02-118A	Rail: TH35-7.5 TH35-7.5AL TH35-15AL * Except for the types 110V AC, 127V AC and 220V AC.	KK2-122A	
Resistor	Resistor: AR9T519-H (110V DC)	Guard ring for 30mm	AR9R054-B: Metallic, black
Voltage stabilizer Device for LED lamp	Fit this resistor when using LED of 24V DC rating with 110V DC power.	dia Types	Used with: AR30G1R, G6R, G3L, G8L
flickering	Voltage stabilizer: AR9T001-E This unit allows an LED lamp of 24V DC rating to be used in a circuit with voltage from 27V to 35V (AC or DC).		AR9R056-B: Metallic, black Used with: AR30G2L, G7L
	Flickering device: 6V AC: AR9T002-A 6V DC: AR9T002-6 12 to 24V AC: AR9T002-G * 12 to 24V DC: AR9T002-E *	AF94-462	AR9R223-B: Metallic, black Used with: AR30M3R, M8R
	* Used in combination with 12V, 15V, or 24V rated LED lamp.	6	AR9R265-B: Metallic, black Used with: AR30B1R
AF95-33	Note: With terminal cover	KK04-115A	AR9R266-B: Metallic, black Used with: AR30B2R
Nut	Type Used with Dimensions, mm AR9R744 AR22, DR22* ø29.7 x 4		Osed Will. Ansobzn
	DR9R001 DR30F4M Ø33.8 x 5 DR30F4N DR30M4M		AR9R267-B: Metallic, black Used with: AR30B3R
AF94-462	* Except AR22VG□, Joy stick selectors, buzzers and numerical indicators	KK04-113C	AR9R007: Metallic, silver Used with: AR30GSR
		KK04-117C	AR9R003: Silver metallic and transparent resin Used with: AR30G4L
KK2-119A			AHX-054: Metallic, silver Used with: AR30G1R, G6R, G3L, G8L

AHX-055: Metallic, silver Used with: AR30G2L, G7L



Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30 Accessories

Description	Туре
Water-tight cap for 22mm dia. types	AR9D797- This rubber cap protects the operator and switch mechanism against dust and water. Use this cap in a dusty or moist environment.
	Used with: AR22E0L,E5L AR22E0R, E5R
	Replace the \square mark by the luminous color code.
	Code Color
	G Green
	R Red
	B Black
	Y Yellow
	Blank Clear (standard)
KK2-124A	Dimensions, mm:
Water-tight cap for	AUMOSO
30mm dia. types	AHX052
	This rubber cap protects the operator and switch mechanism against dust and water. Use this cap in a dusty or moist environment. The only color available is transparent.
	Used with: AR30E□R, E□L
	Dimensions, mm: ø36 x 22.5
Y-1559	



Pushbuttons/Selectors/Pilot Lights AR22/DR22 and AR30/DR30

Accessories

Description	Туре			
Dust-proof cap for 30mm dia. types	Туре	Color	Used with	Spec.
communicative control	AHX032	Red	AR30E0R	Oil-proof
	AHX033	Green		
	AHX034	Black		
	AHX041	Red	AR30F0R	Oil-proof
	AHX042	Green		
	AHX043	Black		
	AHX157-R	Red	AR30B2R,	Oil-proof
	AHX157-G	Green	B3R	
	AHX157-B	Black		
	AHX113-R	Red	AR30E0R	Weather
	AHX113-G	Green		resistance
	AHX113-B	Black	1000500	14/ 11
	AHX111-R	Red	AR30F0R	Weather
SC-993	AHX111-G	Green		resistance
30-993	AHX111-B	Black		
	Dimensions,	mm·		
	AHX032 to		to 043	
	AHX111, 11		10 070	
	', '!			
	M30 940			
		13	-	
		22.5	_	
		<		
	AHX157			
		_{ -	↑ . ↑	
AF89-772	880 S.5			
			>	
				
	31			
	31			
		35.5		
	Llood for soo		oporator fra	n foreign
	Used for sea	ling the		
	debris such a	lling the	oil (oil-proof)	, and
	debris such a water (weath	lling the as dust, ner resist	oil (oil-proof) ance) in env	, and rironments
	debris such a water (weath where the ur	lling the as dust, ner resist	oil (oil-proof) ance) in env	, and rironments
	debris such a water (weath where the ur elements.	lling the as dust, ner resist	oil (oil-proof) ance) in env	, and rironments
Packing	debris such a water (weath where the ur elements.	aling the as dust, her resist hit is in c	oil (oil-proof) ance) in env ontact with s	, and rironments
Packing	debris such a water (weath where the ur elements. AR9Y730: AR22 and DR	aling the as dust, her resist hit is in co	oil (oil-proof) ance) in env ontact with s	, and rironments uch
Packing	debris such a water (weath where the ur elements. AR9Y730: AR22 and Df Note: Except for	aling the as dust, her resist hit is in co	oil (oil-proof) ance) in env ontact with s	, and rironments uch
Packing	debris such a water (weath where the ur elements. AR9Y730: AR22 and DR	aling the as dust, her resist hit is in co	oil (oil-proof) ance) in env ontact with s	, and rironments uch
Packing	debris such a water (weath where the ur elements. AR9Y730: AR22 and DR Note: Except for buzzers	aling the as dust, her resist hit is in co	oil (oil-proof) ance) in env ontact with s	, and rironments uch
Packing	debris such a water (weath where the ur elements. AR9Y730: AR22 and DR Note: Except for buzzers AHX282:	ling the as dust, her resist hit is in co	oil (oil-proof) ance) in env ontact with s ober) selector switc	ehes,
Packing AF94-462	debris such a water (weath where the ur elements. AR9Y730: AR22 and DR Note: Except for buzzers AHX282: AR30 and DR	lling the as dust, ner resist it is in co	oil (oil-proof) ance) in env ontact with s ober) selector switch	, and diriconments uch
0	debris such a water (weath where the ur elements. AR9Y730: AR22 and DF Note: Except for buzzers AHX282: AR30 and DF Note: Except for such a	lling the as dust, her resist hit is in control of the control of	oil (oil-proof) ance) in env ontact with s ober) selector switch	, and diriconments uch
0	debris such a water (weath where the ur elements. AR9Y730: AR22 and DR Note: Except for buzzers AHX282: AR30 and DR	lling the as dust, her resist hit is in control of the control of	oil (oil-proof) ance) in env ontact with s ober) selector switch	, and direction and the second
0	debris such a water (weath where the ur elements. AR9Y730: AR22 and Di Note: Except for buzzers AHX282: AR30 and Di Note: Except for numerical indicata	lling the as dust, her resist hit is in control of the control of	oil (oil-proof) ance) in env ontact with s ober) selector switch	, and direction and the second
0	debris such a water (weath where the ur elements. AR9Y730: AR22 and Di Note: Except for buzzers AHX282: AR30 and Di Note: Except for numerical indication and Di AHX149:	aling the as dust, her resist hit is in control of the control of	oil (oil-proof) ance) in env ontact with s ober) selector switch sin-standerd	, and direction and the second
0	debris such a water (weath where the ur elements. AR9Y730: AR22 and Di Note: Except for buzzers AHX282: AR30 and Di Note: Except for numerical indicata	aling the as dust, her resist hit is in control of the control of	oil (oil-proof) ance) in envontact with s ober) selector switc sin-standerd 4M, F4N, M4N	ehes,

Description	Туре		
Terminal cover	Туре	Used with	Dimensions, mm
	AR9Y305	Contact unit	18.4 x 29 x 8.4
		Lamp terminal	
		Transformer unit *1	
Que Co	DR9Y320	Pilot lights *2	ø22 x 5.8
		(without transformer)	
	DR9Y321	DR30F4M, F4N, M4M	34 sq. x 8.7
AF94-466		(without transformer)	
	*1 Applicabl *2 DR22D0I	e up to 220V. _, E3L, K0L, F□M, E3I L, E3L, K0L	M, E3N, E3P,
KK2-126A	with the ap (Except for numerical	nal cover is provided opplicable types liste r joy stick selector indicators, pilot ligh contact block alone lone)	d above. switches, its with
Terminal cover	Туре	Used with	Dimensions, mm
		O3CG WILIT	Dimonolono, min
	AHX305	Ruzzers	23 5 x 27 5 x 16
	AHX305	Buzzers (without transformer)	23.5 x 27.5 x 16
72	AHX305	Buzzers (without transformer)	23.5 x 27.5 x 16
	AHX305 AHX426	(without transformer)	
ALIVORE		(without transformer) DR30D1L	23.5 x 27.5 x 16 27.5 x 31 x 8
AHX305		(without transformer) DR30D1L (without transformer)	27.5 x 31 x 8
AHX305 SG-842	AHX426	(without transformer) DR30D1L (without transformer) DR30D1L	
	AHX426	(without transformer) DR30D1L (without transformer) DR30D1L (with transformer)	27.5 x 31 x 8
	AHX426	(without transformer) DR30D1L (without transformer) DR30D1L	27.5 x 31 x 8
	AHX426	(without transformer) DR30D1L (without transformer) DR30D1L (with transformer) Buzzers (B0 type)	27.5 x 31 x 8
	AHX426	(without transformer) DR30D1L (without transformer) DR30D1L (with transformer) Buzzers (B0 type) With transformer *	27.5 x 31 x 8
	AHX426	(without transformer) DR30D1L (without transformer) DR30D1L (with transformer) Buzzers (B0 type) With transformer * With short-body transformer	27.5 x 31 x 8
	AHX426	(without transformer) DR30D1L (without transformer) DR30D1L (with transformer) Buzzers (B0 type) With transformer *	27.5 x 31 x 8
SG-842	AHX426	(without transformer) DR30D1L (without transformer) DR30D1L (with transformer) Buzzers (B0 type) With transformer * With short-body transformer With resistor unit	27.5 x 31 x 8
SG-842 AHX426	AHX426 AHX376 * 230V and The termin	(without transformer) DR30D1L (without transformer) DR30D1L (with transformer) Buzzers (B0 type) With transformer * With short-body transformer With resistor unit	27.5 x 31 x 8 13 x 29 x 6.5
SG-842 AHX426	AHX426 AHX376 * 230V and The termin	(without transformer) DR30D1L (without transformer) DR30D1L (with transformer) Buzzers (B0 type) With transformer * With short-body transformer With resistor unit	27.5 x 31 x 8 13 x 29 x 6.5
SG-842 AHX426	AHX426 AHX376 * 230V and The termin	(without transformer) DR30D1L (without transformer) DR30D1L (with transformer) Buzzers (B0 type) With transformer * With short-body transformer With resistor unit	27.5 x 31 x 8 13 x 29 x 6.5



Pushbuttons/Selectors/Pilot Lights/Buzzers AR22/DR22 and AR30/DR30 Special products

Products equipped with contact protection cover

■ Features

A silicon rubber cover is provided for the contact block to keep out foreign matter such as dust, etc.

Other ratings and specifications are the same as those of the standard type.

■ Type AR22 □ Z8 AR30 □ Z8

Specify "Z8" at the end of the type number of the standard type.

■ Dimensions

The only thing different from the standard product is the addition of a 1-mm thick silicon rubber cover around the contact block.

■ Applicable types

Туре	Contact arrangement	Remarks
• Pushbuttons *1	1NO+1NC,	For use with a
• Emergency stop pushbuttons *2	2NO*4, 2NC	1-step contact
Selectors	1NO+3NC, 2NO+2NC,	For use with a
	3NO+1NC, 4NO*4, 4NC	2-step contact
Illuminated pushbuttons *3	1NO*5, 1NC	For use with a
(without transformer)		1-step contact
 Emergency stop illuminated 	1NO+2NC, 2NO+1NC,	For use with a
pushbuttons*2 (without transformer)	3NO*5, 3NC	2-step contact
 Illuminated selectors 		
(without transformer)		

Notes: *1 Except for AR30B0R, B1R, B2R, B3R, N0R, and GPR.

- *2 Except for unibody (VG types)
- *3 Except for AR30Q7L
- *4 Except for emergency stop pushbutton switch
- *5 Except for emergency stop illuminated pushbutton switch

Resisting water-soluble cutting oils and heat

■ Features

Safer operation in environments exposed to water-miscible cutting fluids, machining oils, lubricating oils, cleaning oils and high humidity (up to 95%) is made possible by using materials that protect against rust and corrosion of components. Other ratings and specifications are the same as those of the standard type.

■ Type	
AR22 □ Z9, DR22 □ Z9	
AR30 □ Z9, DR30 □ Z9	

Specify "Z9" at the end of the type number of the standard type.

■ Dimensions

Same as those of the standard type

■ Applicable types

· AR22, DR22 series

AR 22 (Except for joy stick selectors and VG types) DR22 (Except for pilot lights with resistor unit, buzzers, and numerical indicators)

· AR30, DR30 series

AR30 (Except for Q7L types and joy stick selectors) DR30 (Except for D1L, F4M, F4N, M4M types, pilot lights with resistor/resistor unit, buzzers, and numerical indicators)



AR22/DR22 and AR30/DR30 Special products

Meeting IP2X finger protection standards

■ Features

Conforms to EN standard EN60204-1 (protecting against electric shock). The terminal has IEC60529 degree of protection; IP2X finger protection secured (a mock human finger used in testing did not come into contact with charged parts). The contact block and lamp terminal can be easily mounted or removed with the terminal cover mounted.

■ Type

AR22 □ ZB, DR22 □ ZB

AR30 □ ZB, DR30 □ ZB

Specify "ZB" at the end of the type number of the standard type.

■ Accessories

· Contact block (plus terminal cover)

NO contact: AR9B290-D NC contact: AR9B291-D

Transformer unit (plus terminal cover)

AR9T511-□ D

■ Ratings and specifications

- Protection degree: IP2X
- Terminal screw: M3.5

Wiring can be done with a solid wire or fork shaped crimp terminal.

Note: Ring-type crimp terminals cannot be used.

 Other ratings and specifications are the same as those of the standard type.

■ Applicable types

· AR22, DR22 series

AR22 (except for joy stick selectors)

DR22: Without transformer, with transformer (except for short-body types, buzzers and numerical indicators)

· AR30, DR30 series


AR30 (except for joy stick selectors)

DR30: Without transformer, with transformer (except for D1L, short-body types, F4M, F4N, M4M types, buzzers and numerical indicators)


Note: The terminal of the standard type VG has IP2X protection.

■ Dimensions, mm


AR22/Pushbutton switches



DR22/Without transformer



DR22/With transformer



Note: * Except for the types 110V AC, 127V AC and 220V AC.



AR22/DR22 and AR30/DR30 Special products

Metal nut (chrome plated) types

■ Features

The nut is a metallic ring (chrome plated).

Other ratings and specifications are the same as those of the standard model.

■ Type

AR30 □ ZM

DR30 □ ZM

Specify "ZM" at the end of the type number of the standard type.

■ Dimensions, mm

Same as those of the standard types.

■ Applicable types

· AR30, DR30 series

AR30 (except for G4L, G9L, GSR*1, GPR*1, and B0R*1 types) DR30 with round bezel (except for IP54 buzzer type B8)*2

Notes: *1 Standard type is a metallic ring (chrome plated).

*2 The nut of types DR30B0, B5 and B6 buzzers are resin (chrome plated).



Resisting sulfuration gas

■ Features

These products can be used in environments having a concentration of hydrogen sulfide gas of 0.5 ppm or less. The metallic parts have been subjected to an anti-corrosion treatment (see note).

The contacts of the AR series are gold plated.

Note: The body is made of resin and cannot be used with gases that affect resins (plastics).

■ Type

AR22 □ Z4, DR22 □ Z4

AR30 □ **Z4**, **DR30** □ **Z4**

Specify "Z4" at the end of the type number of the standard type.

■ Notes on use

- This product is resistant to light corrosive gas exposure.
- Other measures, such as covering the entire switch with a box, and the degree of protection of the panel should be taken into consideration.

■ Ratings and specifications

Hydrogen sulfide gas concentration of 0.5 ppm max.

Ambient storage temperature: 8 to 37°C

Humidity: 62 to 81%

Other ratings and specifications are the same as those of the standard type.

■ Dimensions, mm

Same as those of the standard types.

■ Applicable types

AR22, DR22 series

AR22 (except for Joy stick selectors and VG type) DR22 (except for pilot lights with resistor unit, buzzers, and numerical indicators)

· AR30, DR30 series

AR30 (except for Joy stick selectors)

DR30 (except for F4M, F4N, M4M types, pilot lights with resistor/resistor unit, buzzers and numerical indicators)

AR22 and DR22 Mass

■ Mass, gram

• Illuminated pushbuttons

Туре	Without transformer			With tran	With transformer *	
	1NO	2NO	2NO+2NC	1NO	2NO	
	(1NC)	(2NC)	- `	(1NC)	(2NC)	
		(1NO+1NC	زز)		(1NO+1NC)	
AR22F0L	39	48	67	85	94	
F5L	39	48	_	85	94	
FOM, FOP	40	49	68	86	95	
F5M, F5P	40	49	_	86	95	
E0L	41	50	69	87	96	
E5L	41	50	_	87	96	
E0M, E0P, M4L, G1L, G2L, G4L	42	51	70	88	97	
E5M, E5P, M9L, G6L, G7L, G9L	42	51	_	88	97	
M4P	43	52	71	89	98	
MOL	44	53	72	90	99	
M5L	44	53	_	90	99	
V5L	48	57	_	94	103	

Note: * 230V and over: +17grams

Pushbuttons

Туре	1NO (1NC)	2NO (2NC) (1NO+1NC)	2NO+2NC
AR22F0R, FAR, F5R, FBR	27	36	55
E0R, EAR, F0S, F0Y, G0R E5R, EBR, F5S, F5Y, G5R	28	37	56
E0S, E0Y, M4R, G2R E5S, E5Y, M9R, G7R	29	38	57
M0R, M5R	31	40	59
S1R, S2R, S3R, S6R	_	43	62
M3R, M8R	44	53	72
V5R	49	58	77

• Emergency stop pushbuttons

Туре	1NC	1NC 2NC 2NO+2 (1NO+1NC)			
AR22VSR	34	43	62		
V0R, V4R	36	45	64		
Q2R	36	45	-		
V2R	38	47	66		
V7R	61	70	89		
VGE	61	65	-		

• Emergency stop illuminated pushbuttons

Type	Without 1	Without transformer		sformer *
	1NC	2NC	1NC	2NC
		(1NO+1NC)		(1NO+1NC)
AR22VSL, VDL	48	57	94	103
V0L	49	58	95	104
VAL	50	59	96	105
V2L	51	60	97	106
VGF	66	70	_	_

Note: * 230V and over : +17grams

■ Mass, gram

Pilot lights

Type	Without tra	Without transformer		With transformer		
	Standard	Short-body	Standard *	Short-body	resistor unit	
DR22D0L, K0L	18	23	70	68	32	
E3L, E3P, F3M, F4M	19	24	71	69	33	
F5M	20	25	72	70	34	
E3M	21	26	73	71	35	
E3N	23	28	75	73	37	

Note: * 230V and over: +17grams

Selector switches

Туре	1NO	2NO (2NC)	2NO+2NC
	(1NC)	(2NC) (1NO+1NC)	
AR22PR	30	39	58
PCR	_	39	58
WR	31	40	59
WCR	_	40	59
RR, PY, WY	32	41	60
RCR, PCY, WCY	_	41	60
RY	33	42	61
RCY	_	42	61
JR, JAR	56	65	83
JCR	_	65	83
JY	57	66	84
JCY	_	66	84

• Illuminated selector switches

Туре	Without to	ransformer	With transformer *		
	1NO (1NC)	2NO (2NC) (1NO+1NC)	2NO+2NC	1NO (1NC)	2NO (2NC) (1NO+1NC)
AR22PL	42	51	70	88	97
PP	43	52	71	89	98

Note: * 230V and over : +17grams

● Joy stick selector switches

Screw terminal types

<u> </u>				
Туре	1NO x2	(1NO+1NC) x2	1NO x4	(1NO+1NC) x4
AR22A2N, A7N	89	99	116	136
A0N, A5N	99	109	126	146
A1N, A6N	112	122	139	159

· Solder/tab terminal types

Туре	(1NO+1NC) x2	(2NO+2NC) x2	(1NO+1NC) x4	(2NO+2NC) x4
AR22A2H, A7H	72	75	82	88
A0H, A5H	82	85	92	98
A1H, A6H	95	98	105	111

Buzzers

Туре	Without transformer	With transformer	With resistor unit
DR22B5	50	105	52
B8	53	108	55
B3	66	121	

Numerical indicators

Type	Solder	Solder (with connector)	With right angle connector
DR22N1	53	62	55
N2	67	76	69

AR30 and DR30 Mass

■ Mass, gram ● Illuminated pushbuttons

Type	Without	transformer		With tra	ansformer *
	1NO (1NC)	2NO (2NC)	2NO+2NC	1NO (1NC)	2NO (2NC)
		(1NO+1NC)			(1NO+1NC)
AR30E0L	49	58	77	95	104
E5L	49	58	_	95	104
G4L	50	59	78	96	105
G9L	50	59	_	96	105
V5L	56	65	_	102	111
G2L	66	75	94	112	121
G7L	66	75	_	112	121
G3L	72	81	100	118	127
G8L	72	81	_	118	127
Q7L	_	159	_	_	205

Note: * 230V and over: +17grams

Pushbuttons

Туре	1NO (1NC)	2NO (2NC) (1NO+1NC)	2NO+2NC
AR30F0R, FAR, F5R, FBR	36	45	64
E0R, EAR, G0R, E5R, EBR, G5R	37	46	65
M4R	38	47	66
M0R, M5R	40	49	68
V5R	42	51	70
S1R, S2R, S3R, S6R	_	53	72
FVR	54	63	82
G1R, G6R	59	68	87
N0R	96	105	124
GPR	116	125	144
GSR, B0R	123	132	151
M3R, M8R	126	135	154
B1R	241	250	269
B3R	279	288	307
B2R	291	300	319

• Emergency stop pushbuttons

Туре	1NC	2NC (1NO+1NC)	2NO+2NC
AR30V0R	43	52	71
Q2R	45	54	_
V2R	46	55	74
V1R	60	69	88

• Emergency stop illuminated pushbuttons

Type	Without transformer		With transformer *	
•	1NC	2NC (1NO+1NC)	1NC	2NC (1NO+1NC)
AR30V0L	57	66	103	112
V2L	59	68	105	114

Note: * 230V and over : +17grams

■ Mass, gram

Pilot lights

• Without transformer type, With transformer type, With resistor unit type

			•	
Туре	Without transformer	With transfo	ormer	With
	Standard	Standard *1	Short-body	resistor unit
DR30D0L, K0L	28	80	78	42
E3L	29	81	79	43
F4M *2	32 (30)	84 (82)	_	46
F4N *2	34 (30)	86 (82)	_	48
M4M *2	37 (32)	88 (84)	_	50
D1L	94	164	_	111

Notes: *1 230V and over : +17grams *2 (): Incandescent lamp

....

With resistor type

Туре	50V DC	110V DC
		220V DC
DR30D0L, K0L (LED)	103	103
D0L, K0L (incandescent)	107	179

Selector switches

Туре	1NO (1NC)	2NO (2NC) (1NO+1NC)	2NO+2NC
AR30PR, WR	41	50	69
PCR, WCR JR, JAR	67	50 76	69 94
JCR	_	76	94

• Illuminated selector switches

Туре	Without transformer			With transfe	ormer *
	1NO (1NC)	2NO (2NC) (1NO+1NC)	2NO+2NC	1NO (1NC)	2NO (2NC) (1NO+1NC)
AR30PL	52	61	80	98	107

Note: * 230V and over : +17grams

Joy stick selector switches

Screw terminal type

Туре	1N0	O x2 (1NO+	·1NC) x2 1NO x4	(1NO+1NC) x4
AR30A2N, A7N	100	110	127	147
A0N, A5N	110	120	137	157
A1N, A6N	124	134	151	171

· Solder/tab terminal type

Type	(1NO+1NC) x2	(2NO+2NC) x2	(1NO+1NC) x4	(2NO+2NC) x4
AR30A2H, A7H	83	86	93	99
A0H, A5H	93	96	103	109
A1H, A6H	107	110	117	123

Buzzers

Туре	Without transformer	With transformer	With resistor unit
DR30B5, B6	47	102	49 (Except B6)
B8	48	103	50
B0	86	_	_

AH164, AH165 and AH165-2 General information

■ Features Design basis

The 16mm dia. series of compact size pushbuttons are 'finger-size', and consequently take up little panel space. AH165-2 series operators are about twice as large as the AH164 and AH165 series operators for easier operation. With many types of operator available, the most suitable switch can be identified by color, shape and legend, and have a smooth, quality "snap-action". In spite of their small size they have a highly reliable mechanism, and are eminently suited for solid state and other electronic circuits. AH164, AH165 and AH165-2 series contact block holders can easily be removed manually. Moreover, the contact block can be easily attached or detached without using any special tools, thus facilitating addition or replacement of contact.

Selector switches


Selector switches can also be supplied in either knob-handle operated or key operated types.

Strong construction

The operator and contact blocks are molded from an excellent thermal resistance resin and can withstand the heat at the time of soldering. Since these pushbuttons are manufactured to industrial standards they can withstand vibration or shock thus eliminating lamp failure due to such causes as loose bases. With regard to the degree of protection, standard types which met the requirements of IP40 of Pub. No. 529, IEC Standards, and oil tight types which meet the requirements of IP65 of the said, are available. This permits the application to various fields, from machine tools to OA (Office Automation) facilities.


Quality feel tough

Both the operator and contact block are precisely engineered. There is no fear of the switch malfunction even after long use and it continues to operate smoothly for its service life of about 1,000,000 operations.

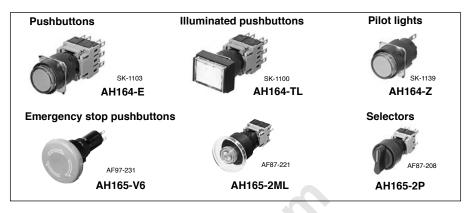

Easy color change

Color lenses fit over the inner button. The lens can easily be removed using a small screwdriver




Note: The luminous color of LEDs and neon illumination types varies with the body color of the product.

Visible inscription

Button legends are printed on legend sheet, which is stuck to the legend plate on the inner button.

The lettering is back lit by the switch lamp and the inscription is highly visible through the color lens.

Contact FUJI for your lettering requirements.




Excellent switch reliability

The switch uses a snap-action mechanism. The pushbuttons are available with either momentary or alternative actions. The snap-action switch has a double break movement which operates independently of the speed of switching. The contacts are made from gold-flashed silver. High contact reliability of 1mA at 5V AC/DC is assured. Contact blocks are available in 1NO+1NC to 3NO+3NC arrangement.

Large terminals

Solder/tab terminal is provided as standard. Wire-wrap terminal is available on reguest.




Safety

FUJI's original Trigger Action mechanism is used in the emergency stop pushbuttons. They are suitable for emergency stop and safety. This mechanism prevents the contacts from moving until the button is pushed and locked.

- Provided with a trigger action mechanism conforming to EN418.
- Provided with direct opening action (approved by TÜV) conforming to EN60947-5-1 and EN60947-5-5.

Alternate action

In the case of alternate action when the button is depressed the contacts are maintained and remain so even if the finger is removed. The button will not return to its free position. In order to remove the lock, the button must be given a second pressure before the button will return to its free position. This makes it most suitable as the switch for a power source.



Pushbutton with finger quards

Finger guards are provided for square or rectangular type pushbuttons (SF, TF, SL and TL types) in order to prevent operational error of adjacent buttons.

Approvals



AH164, AH165 and AH165-2 Quick reference guide

AH164 (standard) / AH165 (oil-tight)

■ Illuminated pushbutton switches

Operator	Туре	Operator	Туре	Operator	Туре
Extended round head	AH164-L, L5 AH165-L, L5	Flush square head	AH164-SL, SL5 AH165-SL, SL5	Flush rectangular head	AH164-TL, TL5 AH165-TL, TL5
9) <u>&</u> 0 (F	SK-1103	₩ 3) <u>&</u> @ W	SK-1102	ૠ૿ ૄૄૺૺૺૄૺ૾ૼૺ	SK-1100
Flush rectangular head with guard	AH164-TGL, TGL5 AH165-TGL, TGL5	Flush square head with guard	AH164-SGL, SGL5 AH165-SGL, SGL5		
9 6 6 0	SK-1101	<u>≜</u> (€@	AF90-301	COUL	

Note: Spot LED and red/green LED types: Not approved standard

■ Pushbutton switches

Operator	Туре	Operator	Туре	Operator	Туре
Extended round head	AH164-E, E5 AH165-E, E5	Mushroom head	AH164-M, M5 AH165-M, M5	Flush square head	AH164-SF, SF5 AH165-SF, SF5
% • • • • • • • • • • • • • • • • • • •	SK-1103	N 6 ((((((((((((((((((SK-1136	%	SK-1102
Flush rectangular head	AH164-TF, TF5 AH165-TF, TF5	Flush rectangular head with guard	AH164-TGF, TGF5 AH165-TGF, TGF5	Flush square head with guard	AH164-SGF, SGF5 AH165-SGF, SGF5
N 6 <u>A</u> (6 <u>(</u>	SK-1100	7 ° 6 6 6 1 1 1 1 1 1 1 1 1 1	SK-1101	<u>≜</u> (€@	AF90-301
Convex square head	AH164-SM, SM5 AH165-SM, SM5	Convex rectangular head	AH164-TM, TM5 AH165-TM, TM5	Push-lock, turn-reset (32mm dia.)	AH165-VR
91° & <u>&</u> (6 @	SK-1134	7 3° 6 ° 2 € (€ (((((((((((((((((((((((((((((((((SK-1135	⊕ (Direct opening action) • (Direct opening action)	AF91-584
Push-lock, turn-reset (40mm dia.)	AH165-V1R				
⊕ (Direct opening action)					
71 ((((((((((((((((((AF91-583				

■ Emergency stop pushbutton switches → (Direct opening action), conform to EN418

Operator	Туре	Operator	Туре
Push-lock, turn-reset (32mm dia.)	AH165-V5R	Push-lock, turn-reset (40mm dia.)	AH165-V6R
	AF97-232	71 1 2 4 1 1	AF97-231



Pushbuttons/Selectors/Pilot Lights/Buzzers AH164, AH165 and AH165-2

Quick reference guide

■ Selector switches

Operator	Туре	Operator T		Operator	Туре
Knob with rectangular bezel	AH164-P AH165-P	Knob with square bezel	AH164-SP AH165-SP	Key with rectangular bezel	AH164-J AH165-J
%	SK-1099	7 6 4 (6 (SK-1133	7 & & (: @	SK-1098
Key with square bezel	AH164-SJ AH165-SJ	Key with rectangular bezel	AH165-JM	Key ⊕ (Direct opening action)	AH165-RJM
0 91° 	SK-1132	⊕ (Direct opening action) • (Direct opening action)	AF95-57	Signal (((((((((((((((((((AF99-320

■ Pilot lights

Lens	Туре	Lens	Туре	Lens	Туре
Extended round	AH164-Z AH165-Z	Flush square	AH164-ZS AH165-ZS	Flush rectangular	AH164-ZT AH165-ZT
71° 26° 26° (€ (((((() (() (() (() () () () () () () (SK-1139	7 & & (6 @	SK-1138	7 6 4 (6 ((SK-1137
Dome	AH165-ZM				
%	AF87-45	CO,			

■ Buzzers

Sound	Type	Sound	Туре	Sound	Туре
Standard	AH164-TX	Loud sound	AH164-TX1	Loud sound with volume control	AH164-TX2B
	W 10		11 17		
	AF87-317		AF87-44	71 ° ()	AF93-297
Standard sound with volume control (IP54)	AH165-X				
7 ()	AF96-243				



AH164, AH165 and AH165-2 Quick reference guide

■ Numerical indicators

		1			İ			
Display	Туре	Display	Туре	Display	Type			
Without decimal decoder		With decimal decoder (5, 12, 15V)	AH164-TC AH165-TC	With decimal decoder (24V)	AH164-TC4□E AH165-TC4□E			
With sign decorder (±1 display)	AH164-TC4□E-1 AH165-TC4□E-1	SCO	AGI GIO	-010	7400 040			
AH165-2 (oil-tight) ■ Illuminated pushbutton switches								
Operator	Туре	Operator	Туре	Operator	Туре			

AH165-2 (oil-tight)

■ Illuminated pushbutton switches

Onereter	Tuno	Operator	Time	Operator	Tuno
Operator	Туре	Operator	Туре	Operator	Туре
Flush round head AH165-2FL, 2FL5		Extended round head	AH165-2EL, 2EL5	Mushroom head	AH165-2ML
91° 6° & ((((((((((((((((((AF87-211	71' & <u>A</u> (E (C)	AF87-210	71° 6° & ((((((((((((((((((AF87-221
Mushroom head with square bezel	AH165-2YML	Flush square head	AH165-2SFL, 2SFL5	Extended square head	AH165-2SEL, 2SEL5
N <u> </u>	AF87-220	7 1 @	AF87-201	N & <u>((((</u>	AF87-200
Concave square head	AH165-2SCL, 2SCL5	Push-lock, turn-reset	AH165-2VL	Push-lock, turn-reset with square bezel	AH165-2YVL
71 ((((((((((((((((((AF87-199	7 ((((((((((((((((((AF87-219	R & & ((((()	AF87-218



Pushbuttons/Selectors/Pilot Lights/Buzzers AH164, AH165 and AH165-2

Quick reference guide

■ Pushbutton switches

Operator	Туре	Operator	Туре	Operator	Туре
Flush round head	AH165-2F, 2F5	Extended round head	AH165-2E, 2E5	Mushroom head	AH165-2M
7 6 4 (6 ((((((((((AF87-211	7 1° € <u>≜</u> (€ (((((((((((((((((((((((((((((((((AF87-210	N <u>&</u> ((((((AF87-215
Mushroom head with square bezel	AH165-2YM	Flush square head	AH165-2SF, 2SF5	Concave square head	AH165-2SCE, 2SCE5
91 ° 6 ° & (6 (((((((((((((((((((AF87-214	71 6 <u>A</u> (((((((((((((((((((AF87-201	71 6 6 6	AF87-199
Extended square head	AH165-2SE, 2SE5	With selector ring	AH165-2S2	With selector ring with square bezell	AH165-2YS2
₩ ��(€@		7 1 € ≜ (€ (((((((((((((((((((((((((((((((7 1'& <u>&</u> (€ @	
Push-lock, turn-reset	AF87-200 AH165-2V	Push-lock, turn-reset with square bezel	AF87-207 AH165-2YV	10/Shakard	AF87-206
	AF87-217	91° 6° & (€ ((())	AF87-216		

■ Selector switches

Operator	Туре	Operator	Туре	Operator	Туре
Knob	AH165-2P	Knob with square bezel	AH165-2YP	Key	AH165-2J
71 1 1 1 1 1 1 1 1 1 	AF87-208	% • • • • • • • • • • • • • • • • • • •	AF87-202	R & (((((((((((((((((((((((((((((((((((AF87-223
Key with square bezel	AH165-2YJ	Lever	AH165-2H	Lever with square bezel	AH165-2SH
71 ° 6 ° 🕰 (6 @	AF87-222	71 ° 6 ° <u>4</u> (6	AF87-209	%	AF87-203

■ Illuminated selector switches

Operator	Туре
Knob	AH165-2PL
	AF87-607



Pushbuttons/Selectors/Pilot Lights/Buzzers AH164, AH165 and AH165-2 Quick reference guide

■ Pilot lights

Lens	Туре	Lens	Туре	Lens	Туре
Flush round	AH165-2Z	Extended round	AH165-2ZE	Flush square	AH165-2SZ
%	AF87-213	7 • 4 · (• (• (• (• (• (• (• (• (• (AF87-212	71° 6 ° & C € (((((((((((((((((((((((((((((((((AF87-205
Extended square	AH165-2SZE	TU/Rhelderil	AF67-212	TOV Resident	AF87-205
N	AF87-204			-010	
TÜV Beckerl	AF87-204				
		C			

■ Part number system

Pushbuttons, illuminated pushbuttons and pilot lights

<u>AH165</u> - <u>L</u> <u>R</u> <u>11</u> <u>E</u> <u>3</u> - <u>W</u>

① Product category

AH164: Standard (IP40) AH165: Oil-tight (IP65)

2 Operator or lens

· Operator for illuminated pushbutton

SL: Flush square head

SL5: Flush square head (Alternate)

TL: Flush rectangular head

TL5: Flush rectangular head (Alternate)

L: Extended round head

L5: Extended round head (Alternate)
TGL: Flush rectangular head with guard

TGL5: Flush rectangular head with guard (Alternate)

SGL: Flush square head with guard

SGL5: Flush square head with guard (Alternate)

· Operator for pushbuttons

SF: Flush square head

SF5: Flush square head (Alternate)

TF: Flush rectangular head

TF5: Flush rectangular head (Alternate)

E: Extended round head

E5: Extended round head (Alternate)
TGF: Flush rectangular head with guard

TGF5: Flush rectangular head with guard (Alternate)

SGF: Flush square head with guard

SGF5: Flush square head with guard (Alternate)

M: Mushroom head

M5: Mushroom head (Alternate)

SM: Convex square head

SM5: Convex square head (Alternate)

TM: Convex rectangular head

TM5: Convex rectangular head (Alternate)
V: Push-lock, turn-reset (32mm dia.)*1*2
V1: Push-lock, turn-reset (40mm dia.)*1*2

· Operator for emergency stop pushbuttons

V5: Push-lock, turn-reset (32mm dia.)*2 V6: Push-lock, turn-reset (40mm dia.)*2

· Lens for pilot lights

Z: Extended roundZS: Flush squareZT: Flush rectangular

ZM: Dome

Note: *1 Product with no trigger action mechanism

*2 AH165 type only, direct opening action

3 Color of button or lens

Code	color	Button	LED	Incandescent	Neon
G	Green	0	0	0	0
R	Red	0	0	0	○ (Orange)
В	Black*	0	_	_	_
Υ	Yellow	0	0	0	○ (Orange)
W	White	0	O (Orange)	0	○ (Orange)
S	Blue	0	0	0	○ (Green)
0	Orange	0	O (Amber)	0	0
RG	Red/Green	-	0	_	_

Notes: • (): indicates luminous color

- AH165-V, V1, V5, V6: Red only
- * Not available for illuminated types

④ Contact arrangement

01: 1NC*1 22: 2NO+2NC 02: 2NC*1 33: 3NO+3NC*2

11: 1NO+1NC

Notes: *1 Available for AH165-V, V1, V5, V6

*2 Not available for with transformer types

⑤ Lamp voltage

Code	LED	Incandescent*2	Neon*2
AA	5V DC*2	_	_
Α	6V DC*2	5V AC/DC	_
В	12V DC	12V AC/DC	_
Е	24V DC	24V AC/DC	_
Н	100-110V AC*1 *2	100-110V AC*1	110V AC
K	-	_	120V AC
M	200-220V AC*1 *2	200-220V AC*1	220V AC
Р	-	_	240V AC

Notes: *1 With transformer (LED: 24V, Incandescent: 28V)

*2 Not available AH165-ZM

· ZM type: LED lamp only (12, 24V DC)

6 Type of lamp

Blank: Incandescent

1: Neon

2: Spot LED, LED (ZM types)

3: Flat LED

7 Terminal

Blank: Solder/tab W: Wire-wrap

S: Soder (AH165-V, V1, V5, V6 types only)

Note: ZM types: wire-wrap terminal only (Code is blank)

AH164 and AH165 Part number system

■ Part number system

Selector switches

<u>AH165</u> - <u>J</u> <u>2</u> <u>8</u> <u>H</u> <u>11</u> <u>A</u> - <u>W</u> $\overline{\nearrow}$

① Product category

AH164: Standard (IP40) AH165: Oil-tight (IP65)

2 Operator

· 2-position, 3-position (operating angle 90°)

SP: Knob with square bezelP: Knob with rectangular bezelSJ: Key with square bezelJ: Key with rectangular bezel

JM: Key with rectangular bezel (Direct opening action) *

RJM: Key (Direct opening action) * Note: * AH165 types (2-position) only

3-position (operating angle 45°)
 SPK: Knob with square bezel
 PK: Knob with rectangular bezel
 SJK: Key with square bezel
 JK: Key with rectangular bezel

③ Operation

2: 2-position, maintained

0: 2-position, spring return*

3: 3-position, maintained

6: 3-position, spring/manual return (Left to center)

7: 3-position, spring/manual return (Right to center)

1: 3-position, spring return

Note: * Except for JM and RJM types

4 Color of knob or key removable position

Color of knob

B: Black

· Key removable position

Code	2-position 3-position 3-position (operating angle 90°) (operating angle					angle 4				
	2	0	1	3	6	7	1	3	6	7
Α	0	0	_	Θ	-	Θ	_	ᢐ	_	0
В	⊗	_	_	Θ	-	_	_	⊗	_	_
С	_	_	_	⊕	_	_	_	\\$	_	_
D	Ø	_	_	Θ		_	_	Ø		_
Е	_		1				1			
F	_	_	_	_	_	_	_	②		_
G	_	_	_	_	_	_	_	•	_	Ŝ

5 Contact arrangement

11: 1NO+1NC 22: 2NO+2NC 33: 3NO+3NC*

Note: * Except for JM and RJM types.

6 Key type No.

A (standard), B, C, D, E, F

7 Terminal

Blank: Solder/tab W: Wire-warp

Note: JM, RJM types: Solder/tab terminal only

Buzzers

<u>AH164</u> - <u>T X</u> <u>B</u> <u>E</u>

① Product category

AH164: Standard (IP00) AH165: Splash-proof (IP54)

② Sound

TX: Standard (AH164)
TX1: Loud sound (AH164)

TX2: Loud sound with volume control (AH164)
X: Standard sound with volume control (AH165)

3 Color of head

B: Black

④ Operating voltage

AAC: 6V AC*2
ADC: 6V DC*2
A: 6V AC/DC*1
E: 12 to 24V AC/DC
F: 35 to 48V AC/DC

Notes: *1 Except for TX and TX1 types
*2 Except for TX2 and X types



AH164 and AH165 Ratings and specifications

■ Standards approved

UL508	File No. E44592
CSA C22.2 No.14	File No. LR20479 (except for AH165-ZM)
	File No. LR84365 (for AH165-ZM)
TÜV: EN60947-5-1	Pushbutton (except for AH165-V, V1), Illuminated pushbutton: R9250087
	Pushbutton (for AH165-V, V1): J9551059
	Selector (except for AH165-JM, RJM): R9250088
	Selector (for AH165-JM, RJM): J9551059
	Pilot lights: R9250089
	Buzzer: J9950092 (for AH164-TX2, AH165-X)
TÜV: EN60947-5-1	Emergency stop pushbutton: R9950093
EN60947-5-5	
	<u> </u>

■ Specifications (Indoor use)

•Pushbutton switches, illuminated pushbutton switches selector switches, pilot lights

Selector Switches, phot i	grita				
Item	AH164	AH165			
Rated insulation voltage	250V AC/DC	250V AC/DC			
Ambient temperature (no condensation or no icing	-20 to +70°C *1	-10 to +70°C *2			
Humidity	45 to 85%RH (at –5 condensation or no				
Durability (operations) Mechanica	Momentary action Alternate action: 2 Push-lock, turn-re Selector switch: 250	Pushbutton switch Momentary action: 1 million Alternate action: 250,000 Push-lock, turn-reset: 100,000 Selector switch: 250,000 *3 100,000 (220V AC 0.7A)			
Dielectric strength	2000V AC, 1 minute (Between lamp and contact terminals: 1500V AC, 1 minute)				
Conditional short-circuit curren	1000A				
Short-circuit protective device	Fuse 1A *4				
Pollution degree	3				
Vibration	Resonance: 10 to 55Hz, double amplitude 0.1mm *5 Constant: 16.7Hz, double amplitude 3mm				
Shock	Malfunction durability: 100m/s ² *6 Mechanical durability: 500m/s ²				
Operating frequency	1200 operation/hour (on-load factor: 40%)				
Insulation resistance	100MΩ or more (500V DC megger)				
Degree of protection	IP40	IP65			

- Notes: *1 For illuminated pushbutton switch and pilot light: -20 to +55°C

 *2 For illuminated pushbutton switch and pilot light: -10 to +55°C

 *3 Key insertion/removal durability for selector switch key types: 10,000

 *4 AH165-V, V1, JM, RJM, V5, V6 types: Fuse 5A

 *5 Emergency stop type: 10 to 500Hz, double amplitude 0.7mm

 (acceleration 50m/s²), according to the test condition of EN60947-5-5 (1998)
 - *6 Emergency stop type:150m/s²

Buzzers

Item	AH164-TX	AH164-TX1			
Rated insulation voltage	60V AC/DC				
Operating voltage	6V AC, 6V DC,12 to 24V AC/DC 35 to 48V AC/DC				
Sound level	80dB (0.1m) 60dB(1m)	90dB (0.1m) 70dB(1m)			
Durability	1000h				
Frequency	2 ±0.5kHz	2.4 to 3.3kHz			
Intermittent cycle	Approx. 170 cycle/m	ninute			
Current consumption	7mA(24, 48V DC) 15mA(6V DC) 20mA (6, 24V AC) 30mA (48V AC)	15mA (24, 48V DC) 25mA (6V DC) 30mA (24V AC) 40mA (48V AC) 50mA (6V AC)			
Dielectric strength	1000V AC, 1 minute				
Insulation resistance	100MΩ or more (500V DC megger)				
Ambient temperature	-20 to +60°C (no condensation or no icin				
Humidity	45 to 85%RH (at -5	5 to +40°C)			
Operator protection	IP00				
Item	AH164-TX2	AH165-X			
Rated insulation voltage	60V AC/DC	<u> </u>			
Operating voltage	6V AC/DC, 12 to 24 35 to 48V AC/DC	V AC/DC			
Sound level	70dB to 90dB (0.1m) 50dB to 70dB (1m)	60dB to 80dB (0.1m) 40dB to 60dB (1m)			
Durability	1000h				
Frequency	2 ±0.5kHz	2.4 to 3.3kHz			
Intermittent cycle	Approx. 170 cycle/m	ninute			
Current consumption	30mA (6V DC) 20mA (24, 48V DC) 40mA (6, 24, 48V AC)				
Dielectric strength	1000V AC, 1 minute				
Insulation resistance	100MΩ or more (500V DC megger)				
Ambient temperature	-20 to +60°C (no co	ndensation or no icing)			
Humidity	45 to 85%RH (at -5 to +40°C)				
Degree of protection	IP00	IP54			



Pushbuttons/Selectors/Pilot Lights/Buzzers AH164 and AH165

AH164 and AH165 Ratings and specifications

■ Contact ratings

UL/CSA standards

current	Rated	Maximum current			
	operational voltage	AC (Res. load)	DC (Res. load)		
5A	24V	_	1.0A		
	125V 250V	5.0A	0.2A _		

•EN standards (TÜV approved)

Rated thermal current	Rated operational voltage	Rated operational current					
		AC 15 (Ind. load)	AC 13 (Ind. load)	AC 12 (Res. load)	DC 13 (Ind. load)	DC 12 (Res. load)	
5A	24V	_	_	_	0.7A	1.0A	
	100 to 120V	0.3A	1.0A	1.5A	_	_	
	100 to 125V	_	_	_ (0.15A	0.2A	
	200 to 240V	0.3A	0.7A	1.0A	-	-	

■ Lamp ratings

Rated operational	Consumption					
voltage	LED	Incandescent	Neon			
	DC	AC/DC	AC			
5V	14mA (Yellow: 28mA)	0.45W (6V)	_			
6V	14mA (Yellow: 28mA)	-	_			
12V	14mA	0.55W (14V)	_			
24V	14mA	0.55W (28V)				
110V	-	-	0.19VA			
120V	-	-	0.21VA			
220V	-	<u>-</u>	0.38VA			
240V	-		0.42VA			

Notes: • With transformer (LED): 1.5VA/110, 220V

- With transformer (Incandescent): 2VA/110, 220V
- For the incandescent lamps, the values in parentheses indicate the rated voltage of the lamps.

■ Contact reliability

FUJI has confirmed that the unit can be used in 1mA circuit conditions at 5V AC or DC. The operable range may vary depending on the ambient conditions and type of load.



Illuminated Pushbuttons AH164 and AH165

■ Illuminated pushbutton switches/without transformer

Operator	Lamp	Voltage	Contact	Momentary action		Alternate action	
				AH164 type	AH165 (Oil-tight) type	AH164 type	AH165 (Oil-tight) type
Extended round head	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-L□11E3 AH164-L□22E3 AH164-L□33E3	AH165-L□11E3 AH165-L□22E3 AH165-L□33E3	AH164-L5□11E3 AH164-L5□22E3 AH164-L5□33E3	AH165-L5□11E3 AH165-L5□22E3 AH165-L5□33E3
	Spot LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-L□11E2 AH164-L□22E2 AH164-L□33E2	AH165-L□11E2 AH165-L□22E2 AH165-L□33E2	AH164-L5□11E2 AH164-L5□22E2 AH164-L5□33E2	AH165-L5□11E2 AH165-L5□22E2 AH165-L5□33E2
	Incandes- cent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-L□11E AH164-L□22E AH164-L□33E	AH165-L□11E AH165-L□22E AH165-L□33E	AH164-L5□11E AH164-L5□22E AH164-L5□33E	AH165-L5□11E AH165-L5□22E AH165-L5□33E
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-L□11H1 AH164-L□22H1 AH164-L□33H1	AH165-L□11H1 AH165-L□22H1 AH165-L□33H1	AH164-L5□11H1 AH164-L5□22H1 AH164-L5□33H1	AH165-L5□11H1 AH165-L5□22H1 AH165-L5□33H1
SK-1103		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-L□11M1 AH164-L□22M1 AH164-L□33M1	AH165-L□11M1 AH165-L□22M1 AH165-L□33M1	AH164-L5□11M1 AH164-L5□22M1 AH164-L5□33M1	AH165-L5□11M1 AH165-L5□22M1 AH165-L5□33M1
Flush square head	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SL□22E3	AH165-SL□11E3 AH165-SL□22E3 AH165-SL□33E3	AH164-SL5□22E3	AH165-SL5□11E3 AH165-SL5□22E3 AH165-SL5□33E3
	Spot LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SL□22E2	AH165-SL□11E2 AH165-SL□22E2 AH165-SL□33E2	AH164-SL5□22E2	AH165-SL5□11E2 AH165-SL5□22E2 AH165-SL5□33E2
	Incandes- cent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SL□11E AH164-SL□22E AH164-SL□33E	AH165-SL□11E AH165-SL□22E AH165-SL□33E	AH164-SL5□11E AH164-SL5□22E AH164-SL5□33E	AH165-SL5□11E AH165-SL5□22E AH165-SL5□33E
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SL□22H1	AH165-SL□11H1 AH165-SL□22H1 AH165-SL□33H1	AH164-SL5□22H1	AH165-SL5□11H1 AH165-SL5□22H1 AH165-SL5□33H1
SK-1102		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SL□22M1	AH165-SL□11M1 AH165-SL□22M1 AH165-SL□33M1	AH164-SL5□22M1	AH165-SL5□11M1 AH165-SL5□22M1 AH165-SL5□33M1
Flush rectangular head	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TL□22E3	AH165-TL□11E3 AH165-TL□22E3 AH165-TL□33E3	AH164-TL5□22E3	AH165-TL5□11E3 AH165-TL5□22E3 AH165-TL5□33E3
424	Spot LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TL□22E2	AH165-TL□11E2 AH165-TL□22E2 AH165-TL□33E2	AH164-TL5□22E2	AH165-TL5□11E2 AH165-TL5□22E2 AH165-TL5□33E2
	Incandes- cent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TL□11E AH164-TL□22E AH164-TL□33E	AH165-TL□11E AH165-TL□22E AH165-TL□33E	AH164-TL5□11E AH164-TL5□22E AH164-TL5□33E	AH165-TL5□11E AH165-TL5□22E AH165-TL5□33E
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TL□22H1	AH165-TL□11H1 AH165-TL□22H1 AH165-TL□33H1		AH165-TL5□11H1 AH165-TL5□22H1 AH165-TL5□33H1
SK-1100		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TL□22M1	AH165-TL□11M1 AH165-TL□22M1 AH165-TL□33M1	AH164-TL5□22M1	AH165-TL5□11M1 AH165-TL5□22M1 AH165-TL5□33M1


Note: Replace the ☐ mark by the button color code, see page 137.




Illuminated Pushbuttons AH164 and AH165

Operator	Lamp	Voltage	Contact	Momentary action		Alternate action	
				AH164 type	AH165 (oil-tight) type	AH164 type	AH165 (oil-tight) type
Flush rectangular head with guard	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TGL□11E3 AH164-TGL□22E3 AH164-TGL□33E3	AH165-TGL□11E3 AH165-TGL□22E3 AH165-TGL□33E3	AH164-TGL5□11E3 AH164-TGL5□22E3 AH164-TGL5□33E3	AH165-TGL5□11E3 AH165-TGL5□22E3 AH165-TGL5□33E3
	Incandes- cent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TGL□11E AH164-TGL□22E AH164-TGL□33E	AH165-TGL□11E AH165-TGL□22E AH165-TGL□33E	AH164-TGL5□11E AH164-TGL5□22E AH164-TGL5□33E	AH165-TGL5□11E AH165-TGL5□22E AH165-TGL5□33E
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TGL□11H1 AH164-TGL□22H1 AH164-TGL□33H1	AH165-TGL□11H1 AH165-TGL□22H1 AH165-TGL□33H1	AH164-TGL5□11H1 AH164-TGL5□22H1 AH164-TGL5□33H1	AH165-TGL5□11H1 AH165-TGL5□22H1 AH165-TGL5□33H1
SK-1101		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-TGL□11M1 AH164-TGL□22M1 AH164-TGL□33M1	AH165-TGL□11M1 AH165-TGL□22M1 AH165-TGL□33M1		AH165-TGL5□11M1 AH165-TGL5□22M1 AH165-TGL5□33M1
Flush square head with guard	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SGL□11E3 AH164-SGL□22E3 AH164-SGL□33E3	AH165-SGL□11E3 AH165-SGL□22E3 AH165-SGL□33E3	AH164-SGL5□11E3 AH164-SGL5□22E3 AH164-SGL5□33E3	
	Incandes- cent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SGL□11E AH164-SGL□22E AH164-SGL□33E	AH165-SGL□11E AH165-SGL□22E AH165-SGL□33E	AH164-SGL5□11E AH164-SGL5□22E AH164-SGL5□33E	AH165-SGL5□11E AH165-SGL5□22E AH165-SGL5□33E
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SGL□11H1 AH164-SGL□22H1 AH164-SGL□33H1	AH165-SGL□11H1 AH165-SGL□22H1 AH165-SGL□33H1	AH164-SGL5□11H1 AH164-SGL5□22H1 AH164-SGL5□33H1	AH165-SGL5□22H1
AF90-301		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH164-SGL□11M1 AH164-SGL□22M1 AH164-SGL□33M1	AH165-SGL□11M1 AH165-SGL□22M1 AH165-SGL□33M1	AH164-SGL5□22M1	AH165-SGL5□11M1 AH165-SGL5□22M1 AH165-SGL5□33M1

■ Dimensions, mm






·Button color

Color	Green	Red	White	Yellow	Blue	Orange
Code	G	R	W	Υ	S	0

- · The color lens is made of a tinted transparent material.
- A white illuminated pushbutton is fitted with a transparent color lens. (Except the neon lamp)
- With wire-wrap pin terminals have a depth of 47mm.


SL, SL5



TGL, TGL5 SGL, SGL5

15sq.

18sq.



Lamp voltage

Voltages other than above are available

Code	LED	Incandescent	Neon
AA	5V DC		-
A	6V DC	5V AC/DC	-
B	12V DC	12V AC/DC	-
K	-		120V AC
P	-	_	240V AC

Illuminated Pushbuttons AH164 and AH165

■ Illuminated pushbutton switches/without transformer (Red/green LED)

Operator	Lamp	Voltage	Contact	Momentary action		Alternate action	
				AH164 type	AH165 (oil-tight) type	AH164 type	AH165 (oil-tight) type
Extended round head	Red/green LED	24V DC	1NO+1NC	AH164-LRG11E3	AH165-LRG11E3	AH164-L5RG11E3	AH165-L5RG11E3
			2NO+2NC	AH164-LRG22E3	AH165-LRG22E3	AH164-L5RG22E3	AH165-L5RG22E3
SK-1103			3NO+3NC	AH164-LRG33E3	AH165-LRG33E3	AH164-L5RG33E3	AH165-L5RG33E3
Flush square head	Red/green LED	24V DC	1NO+1NC	AH164-SLRG11E3	AH165-SLRG11E3	AH164-SL5RG11E3	AH165-SL5RG11E3
			2NO+2NC	AH164-SLRG22E3	AH165-SLRG22E3	AH164-SL5RG22E3	AH165-SL5RG22E3
SK-1102			3NO+3NC	AH164-SLRG33E3	AH165-SLRG33E3	AH164-SL5RG33E3	AH165-SL5RG33E3
Flush rectangular head	Red/green	24V DC	1NO+1NC	AH164-TLRG11E3	AH165-TLRG11E3	AH164-TL5RG11E3	AH165-TL5RG11E3
	LED		2NO+2NC	AH164-TLRG22E3	AH165-TLRG22E3	AH164-TL5RG22E3	AH165-TL5RG22E3
SK-1100			3NO+3NC	AH164-TLRG33E3	AH165-TLRG33E3	AH164-TL5RG33E3	AH165-TL5RG33E3
Flush square head with	Red/green	24V DC	1NO+1NC	AH164-SGLRG11E3	AH165-SGLRG11E3	AH164-SGL5RG11E3	AH165-SGL5RG11E3
guard	LED		2NO+2NC	AH164-SGLRG22E3	AH165-SGLRG22E3	AH164-SGL5RG22E3	AH165-SGL5RG22E3
AF90-301			3NO+3NC	AH164-SGLRG33E3	AH165-SGLRG33E3	AH164-SGL5RG33E3	AH165-SGL5RG33E3
Flush rectangular head	Red/green	24V DC	1NO+1NC	AH164-TGLRG11E3	AH165-TGLRG11E3	AH164-TGL5RG11E3	AH165-TGL5RG11E3
with guard	LED		2NO+2NC	AH164-TGLRG22E3	AH165-TGLRG22E3	AH164-TGL5RG22E3	AH165-TGL5RG22E3
SK-1101			3NO+3NC	AH164-TGLRG33E3	AH165-TGLRG33E3	AH164-TGL5RG33E3	AH165-TGL5RG33E3

Note: • The only color codes used for red/green LEDs are R and G. The color lens is transparent. Red/green LEDs do not have high-brightness specifications.

• 24V DC only



Illuminated Pushbuttons AH164 and AH165


■ Illuminated pushbutton switches/with transformer


Operator	Lamp	Voltage	Contact	Momentary action		Alternate action	
				AH164 type	AH165 (oil-tight) type	AH164 type	AH165 (oil-tight) type
Extended round head	Flat LED	■ Voltage code	1NO+1NC	AH164-L□11 ■ 3	AH165-L□11 ■ 3	AH164-L5□11 ■ 3	AH165-L5□11 ■ 3
		H: 100-110V AC	2NO+2NC	AH164-L□22 ■ 3	AH165-L□22 ■ 3	AH164-L5□22 ■ 3	AH165-L5□22 ■ 3
	Incandes- cent	M: 200-220V	1NO+1NC	AH164-L□11 ■	AH165-L□11 ■	AH164-L5□11 ■	AH165-L5□11 ■
AF90-945		AC	2NO+2NC	AH164-L□22 ■	AH165-L□22 ■	AH164-L5□22 ■	AH165-L5□22■
Flush square head	Flat LED	■ Voltage code H:	1NO+1NC	AH164-SL□11 ■ 3	AH165-SL□11 ■ 3	AH164-SL5□11 ■ 3	AH165-SL5□11 ■ 3
		100-110V AC	2NO+2NC	AH164-SL□22 ■ 3	AH165-SL□22 ■ 3	AH164-SL5□22 ■ 3	AH165-SL5□22 ■ 3
100	Incandes- cent	M: 200-220V	1NO+1NC	AH164-SL□11 ■	AH165-SL□11■	AH164-SL5□11■	AH165-SL5□11 ■
AF90-946		AC	2NO+2NC	AH164-SL□22■	AH165-SL□22 ■	AH164-SL5□22■	AH165-SL5□22 ■
Flush rectangular head	Flat LED	■ Voltage code H:	1NO+1NC	AH164-TL□11 ■ 3	AH165-TL□11 ■ 3	AH164-TL5□11 ■ 3	AH165-TL5□11 ■ 3
563		100-110V	2NO+2NC	AH164-TL□22 ■ 3	AH165-TL□22 ■ 3	AH164-TL5□22 ■ 3	AH165-TL5□22 ■ 3
	Incandes- cent	AC M: 200-220V	1NO+1NC	AH164-TL□11■	AH165-TL□11■	AH164-TL5□11 ■	AH165-TL5□11 ■
AF90-947		AC	2NO+2NC	AH164-TL□22■	AH165-TL□22 ■	AH164-TL5□22■	AH165-TL5□22■
Flush rectangular head with guard	Flat LED	■ Voltage code H:	1NO+1NC	AH164-TGL□11 ■ 3	AH165-TGL□11 ■ 3	AH164-TGL5□11 ■ 3	AH165-TGL5□11 ■ 3
		100-110V - AC	2NO+2NC	AH164-TGL□22 ■ 3	AH165-TGL□22 ■ 3	AH164-TGL5□22 ■ 3	AH165-TGL5□22 ■ 3
	Incandes- cent	M: 200-220V	1NO+1NC	AH164-TGL□11■	AH165-TGL□11■	AH164-TGL5□11 ■	AH165-TGL5□11■
AF90-941		AC	2NO+2NC	AH164-TGL□22■	AH165-TGL□22■	AH164-TGL5□22■	AH165-TGL5□22■
Flush square head with guard	Flat LED	■ Voltage code H:	1NO+1NC	AH164-SGL□11 ■ 3	AH165-SGL□11 ■ 3	AH164-SGL5□11 ■ 3	AH165-SGL5□11 ■ 3
		100-110V AC	2NO+2NC	AH164-SGL□22 ■ 3	AH165-SGL□22 ■ 3	AH164-SGL5□22 ■ 3	AH165-SGL5□22 ■ 3
	Incandes- cent	M: 200-220V	1NO+1NC	AH164-SGL□11■	AH165-SGL□11■	AH164-SGL5□11■	AH165-SGL5□11■
AF90-948	D '	AC	2NO+2NC	AH164-SGL□22■	AH165-SGL□22 ■	AH164-SGL5□22 ■	AH165-SGL5□22 ■


Note: Replace the \square mark by the button color code, see page 140.


Illuminated Pushbuttons AH164 and AH165

■ Dimensions, mm







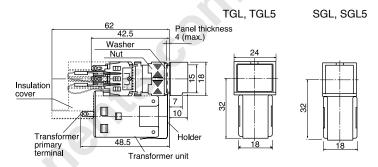

Button color

Color	Green	Red	White	Yellow	Blue	Orange
Code	G	R	W	Υ	S	0

• The color lens is made of a tinted transparent material.



Pushbuttons AH164 and AH165

■ Duchhutton ewitches

■ Pushbutton switches							
Operator	Contact	Momentary action	on	Alternate action		Dimensions, mm	
		AH164 type A	H165 (oil-tight) type	AH164 type AH	1165 (oil-tight) type		
Extended round head	1NO+1NC	AH164-E□11	AH165-E□11	AH164-E5□11	AH165-E5□11	Washer Panel thickness Nut 4 (max.)	
	2NO+2NC	AH164-E□22	AH165-E□22	AH164-E5□22	AH165-E5□22		
SK-1103	3NO+3NC	AH164-E□33	AH165-E□33	AH164-E5□33	AH165-E5□33	42.5 10 18sq.	
Flush square head	1NO+1NC	AH164-SF□11	AH165-SF□11	AH164-SF5□11	AH165-SF5□11	Washer Panel thickness Nut 4 (max.)	
	2NO+2NC	AH164-SF□22	AH165-SF□22	AH164-SF5□22	AH165-SF5□22	7 15sq.	
SK-1102	3NO+3NC	AH164-SF□33	AH165-SF□33	AH164-SF5□33	AH165-SF5□33	42.5 10 18sq.	
Flush rectangular head	1NO+1NC	AH164-TF□11	AH165-TF□11	AH164-TF5□11	AH165-TF5□11	Washer Panel thickness Nut 4 (max.)	
	2NO+2NC	AH164-TF□22	AH165-TF□22	AH164-TF5□22	AH165-TF5□22		
SK-1100	3NO+3NC	AH164-TF□33	AH165-TF□33	AH164-TF5□33	AH165-TF5□33	42.5 10 21 24	
Flush rectangular head with guard	1NO+1NC	AH164-TGF□11	AH165-TGF□11	AH164-TGF5□11	AH165-TGF5□11	Washer Panel thickness Nut 4 (max.)	
	2NO+2NC	AH164-TGF□22	AH165-TGF□22	AH164-TGF5□22	2 AH165-TGF5□22	7 21	
SK-1101	3NO+3NC	AH164-TGF□33	AH165-TGF□33	AH164-TGF5□33	3 AH165-TGF5□33	42.5 10 21 24	
Flush square head with guard	1NO+1NC	AH164-SGF□11	AH165-SGF□11	AH164-SGF5⊡11	AH165-SGF5□11	Washer Panel thickness Nut 4 (max.)	
	2NO+2NC	AH164-SGF□22	AH165-SGF□22	AH164-SGF5□22	2 AH165-SGF5□22		
AF90-301	3NO+3NC	AH164-SGF□33	AH165-SGF□33	AH164-SGF5□33	3 AH165-SGF5□33	42.5 10 15sq. 18sq.	
Mushroom head	1NO+1NC	AH164-M□11	AH165-M□11	AH164-M5□11	AH165-M5□11	Washer Panel thickness Nut 4 (max.)	
TO STATE OF THE PARTY OF THE PA	2NO+2NC	AH164-M□22	AH165-M□22	AH164-M5□22	AH165-M5□22		
SK-1136	3NO+3NC	AH164-M□33	AH165-M□33	AH164-M5□33	AH165-M5□33	42.5 16.5	
Convex square head	1NO+1NC	AH164-SM□11	AH165-SM□11	AH164-SM5□11	AH165-SM5□11	Washer Panel thickness Nut 4 (max.)	
	2NO+2NC	AH164-SM□22	AH165-SM□22	AH164-SM5□22	AH165-SM5□22		
SK-1134	3NO+3NC	AH164-SM□33	AH165-SM□33	AH164-SM5□33	AH165-SM5□33	42.5 16.5	
Convex rectangular head	1NO+1NC	AH164-TM□11	AH165-TM□11	AH164-TM5□11	AH165-TM5□11	Washer Panel thickness Nut 4 (max.)	
	2NO+2NC	AH164-TM□22	AH165-TM□22	AH164-TM5□22	AH165-TM5□22		
SK-1135	3NO+3NC	AH164-TM□33	AH165-TM□33	AH164-TM5□33	AH165-TM5□33	42.5 16.5 23.5	

Button color

Replace the \square mark by the following color code

Color	Green	Red	Black	White	Blue	Yellow	Orange
Code	G	R	В	W	S	Υ	0

- The color lens is made of a tinted transparent material. (Except the
- M, SM, TM types)
 A white pushbutton is fitted with a transparent color lens.(Except the M, SM, TM types)
 A black pushbutton consists of a transparent color lens and an attached black legend plate. (Except M, SM, TM types)
- With wire-wrap pin terminals have a depth of 47mm.

Pushbuttons AH165

■ Pushbutton switches

→ (Direct opening action)

Operator	Button color	Contact	Terminal	AH165 (oil-tight) type	Dimensions, mm
Push-lock, turn-reset (32mm dia.)	Red	1NC	Solder/Tab Solder	AH165-VR01 (AH165-VR01-S)	Panel thickness 4 (max.)
AF91-584		2NC		AH165-VR02 (AH165-VR02-S)	15.5 15 24.5 (20)
Push-lock, turn-reset (40mm dia.)		1NC		AH165-V1R01 (AH165-V1R01-S)	Washer Panel thickness Via 4 (max.)
AF91-583		2NC		AH165-V1R02 (AH165-V1R02-S)	15.5 15 24.5 *(20)

- Notes: * () For switch with solder terminal.

 Contact arrangements indicated in the table can be supplied.

 Product with no trigger action mechanism.

■ Emergency stop pushbutton switches

⊖ (Direct opening action), conform to EN418

Operator	Button color	Contact	Terminal	AH165 (oil-tight) type	Dimensions, mm
Push-lock, turn-reset (32mm dia.)	Red	1NC	Solder/Tab Solder	AH165-V5R01 (AH165-V5R01-S)	Washer Panel thickness 6 (max.)
AF97-232		2NC	600	AH165-V5R02 (AH165-V5R02-S)	33 42 (37.5)
Push-lock, turn-reset (40mm dia.)		1NC		AH165-V6R01 (AH165-V6R01-S)	Washer Panel thickness 6 (max.)
AF97-231		2NC		AH165-V6R02 (AH165-V6R02-S)	33 42 (37.5) 24.5

Notes: * () For switch with solder terminal.

• Contact arrangements indicated in the table can be supplied.




■ Selector switches/2-position (90-degree)

Selector switches	s/z-position	(an-aegree)			
Operator	Operation	Key removable position	Contact	AH164 type	AH165 (oil-tight) type	Dimensions, mm
Knob with	Maintained		1NO+1NC	AH164-P2B11	AH165-P2B11	Washer Panel thickness (49
rectangular bezel		_	2NO+2NC	AH164-P2B22	AH165-P2B22	Washer Panel thickness ϕ 18 Nut 4 (max.)
			3NO+3NC	AH164-P2B33	AH165-P2B33	
	Spring		1NO+1NC	AH164-P0B11	AH165-P0B11	
	return 🛇	_	2NO+2NC	AH164-P0B22	AH165-P0B22	8.5
AF89-564			3NO+3NC	AH164-P0B33	AH165-P0B33	42.5 18.5
Knob with square	Maintained		1NO+1NC	AH164-SP2B11	AH165-SP2B11	Panel thickness
bezel		_	2NO+2NC	AH164-SP2B22	AH165-SP2B22	Washer 4 (max.)
			3NO+3NC	AH164-SP2B33	AH165-SP2B33	
	Spring _		1NO+1NC	AH164-SP0B11	AH165-SP0B11	
	return 🛇	_	2NO+2NC	AH164-SP0B22	AH165-SP0B22	8.5
AF89-563			3NO+3NC	AH164-SP0B33	AH165-SP0B33	42.5 18.5 18sq.
Key with	Maintained		1NO+1NC	AH164-J2A11A	AH165-J2A11A	
rectangular bezel		0	2NO+2NC	AH164-J2A22A	AH165-J2A22A	
		Α	3NO+3NC	AH164-J2A33A	AH165-J2A33A	
			1NO+1NC	AH164-J2B11A	AH165-J2B11A	Paral Milatra
		⊗	2NO+2NC	AH164-J2B22A	AH165-J2B22A	Washer Panel thickness Nut 4 (max.)
		В	3NO+3NC	AH164-J2B33A	AH165-J2B33A	
			1NO+1NC	AH164-J2D11A	AH165-J2D11A	<u> </u>
		Ø	2NO+2NC	AH164-J2D22A	AH165-J2D22A	42.5 8.5 25.5
		D	3NO+3NC	AH164-J2D33A	AH165-J2D33A	10.5
	Spring _		1NO+1NC	AH164-J0A11A	AH165-J0A11A	
	return 🛇	0	2NO+2NC	AH164-J0A22A	AH165-J0A22A	
AF89-561		Α	3NO+3NC	AH164-J0A33A	AH165-J0A33A	
Key with square	Maintained		1NO+1NC	AH164-SJ2A11A	AH165-SJ2A11A	
bezel		0	2NO+2NC	AH164-SJ2A22A	AH165-SJ2A22A	
		Α	3NO+3NC	AH164-SJ2A33A	AH165-SJ2A33A	
			1NO+1NC	AH164-SJ2B11A	AH165-SJ2B11A	Weeker Panel thickness
		8	2NO+2NC	AH164-SJ2B22A	AH165-SJ2B22A	Washer 4 (max.)
		В	3NO+3NC	AH164-SJ2B33A	AH165-SJ2B33A	
10			1NO+1NC	AH164-SJ2D11A	AH165-SJ2D11A	
		0	2NO+2NC	AH164-SJ2D22A	AH165-SJ2D22A	42.5
		D	3NO+3NC	AH164-SJ2D33A	AH165-SJ2D33A	10.5 18sq.
	Spring		1NO+1NC	AH164-SJ0A11A	AH165-SJ0A11A	
	return 🛇	0	2NO+2NC	AH164-SJ0A22A	AH165-SJ0A22A	
AF89-562		Α	3NO+3NC	AH164-SJ0A33A	AH165-SJ0A33A	
	1	I .	i .	i .		I .


 The operating angle range can be changed as shown below by setting the attached flange shifted by 45° in combination with the contact block.

In this case, the minimum mounting pitch is 26mm because the contact block is shifted by 45° from the flange.



- There are 6 available key types; A, B, C, D, E and F. Standard key code is A.
- With wire-wrap pin terminals have a depth of 47mm.

· Contact block position



• Contact arrangement and operator position: 2-position selector switch

Contact arrange- ment		1NO+1NC	2NO+2NC	3NO+3NC
Operator position	Left	M 1 <u>O I O</u> 2 3 O O 4	U 1 O 1 O 2 3 O O 4 1 O 1 O 2 3 O O 4	1 Q L Q 2 3 O O 4 1 Q L Q 2 3 O O 4 1 Q L Q 2 3 O O 4 L
	Right	M 1 O O 2 3 O O 4	U 1 O O 2 3 O O 4 1 O O 2 3 O O 4	1 0 0 2 U 3 0 0 4 M 1 0 0 2 M 1 0 0 2 L 3 0 0 4 L

3-position selector switch

o poortio	o position coloctor switch							
Contact a	rrange-	2NO+2NC	3NO+3NC					
Operator position			U M L 10 1 02 10 02 10 02 30 04 30 04 30 04					
	Center	1 <u>O I O</u> 2 1 <u>O I O</u> 2 30 O4 30 O4	10 102 10 102 10 102 30 04 30 04 30 04					
	Right	10 02 10 102 30 04 30 04	10 02 10 02 10 102 30 04 30 04 30 04					

Selector Switches **AH165**

■ Selector switches/2-position (90-degree)

→ (Direct opening action)

Operator	Operation	Key removable position	Contact	AH165 (oil-tight) type	Dimensions, mm
Key with rectangular	Maintained	A ⊗	1NO+1NC	AH165-JM2A11A	Washer Panel thickness 24 Nut 4 (max.)
bezel		В ⊗		AH165-JM2B11A	32.5 8.8
		D ⊘		AH165-JM2D11A	41.5 10.8 25.5
AF95-57		A ⊗	2NO+2NC	AH165-JM2A22A	Washer Panel thickness Nut \ 4 (max.)
		В ⊗		AH165-JM2B22A	
AF97-334		D Ø		AH165-JM2D22A	37.5 8.5 48.5 10.5 25.5
Key with round bezel	Maintained	A 🛇	1NO+1NC	AH165-RJM2A11A	Washer Panel thickness Nut 4(max,)
(SD)		в ⊗		AH165-RJM2B11A	
China -		D ⊘		AH165-RJM2D11A	32.5 9.8 41.5 10.8 25.5
		A 🛇	2NO+2NC	AH165-RJM2A22A	Washer Panel thickness
AF99-320		В ⊗		AH165-RJM2B22A	Nut 4(max)
		D ⊘		AH165-RJM2D22A	37.5 9.8 18 18 18 18 18 18 18 18 18 18 18 18 18

[•] There are 6 available key types; A, B, C, D, E and F. Standard key code is A.

\cdot Contact arrangement and operator positions:


2-position selector switch


Contact arrangement		1NO+1NC
Operator position	Left 🛇	O O O O O O O O O O O O O O O O O O O
	Right	
	0	O O O O O O O O O O O O O O O O O O O

Contact arrangement		2NO+2NC	
Operator position	Left	U O O 11 12 O O 21 22	11 12 0 0 21 22
	Right	O	O O 11 12 O O 21 22

· Terminal number

1NO+1NC 2NO+2NC





■ Selector switches/3-position (90-degree)

Operation Operation (rectangular bezel) Contact (monocable position) AH166 (sol-light) type (sol-ligh	■ Selector switch	ies/3-position	(90-aegree)			
Maintained Position Positio	Operator	Operation		Contact	AH164 type	AH165	Dimensions, mm
Knob with rectangular bezel Spring/						(oil-tight) type	
rectangular bazel			position				
Spring/		Maintained	_				
Spring/	rectangular bezel						Washer Panel thickness
Spring/			_				\ 4 (max.)
Spring/					AH164-P6B33		
Spring return		1	_				
Sichop	- DIT						
Rindo with square bezel Maintained			_				42.5 18.5 24
Dezel							
Spring	Knob with square	Maintained	_		AH164-SP3B22	AH165-SP3B22	
Spring	bezel						
Spring	200	1 ' "	_				
Maintained							
Spring return		1	_				
SK-1133							8.5
Key with rectangular bezel Maintained* ⊕ A 2NO+2NC 2NO+2NC 3NO+3NC 2NO+2NC 3NO+3NC 2NO+2NC 3NO+3NC			_				42.5 18.5 1894.
rectangular bezel A 3NO-3NC AH164-J3823A AH165-J3823A D E 3NO-3NC AH164-J3E22A AH165-J3E22A AH165-J3B3A AH165-J3B3A AH165-J3B3A AH165-J3D22A AH165-J3D22A AH165-J3D22A AH165-J3D3A AH165-J3D3A AH165-J3D3A AH165-J3D3A AH165-J3C3A AH165-J3C3A AH165-J3C3A AH165-J3C3A AH165-J3C3A AH165-J3C3A AH165-J3C3A AH165-J3C3A AH165-J3C3A AH165-J3C3A AH165-J3C3A AH165-J6E22A AH165-J6E22A AH165-J6B3A AH165-J6B3A AH165-J6B3A AH165-J3C3A AH165-J6B3A AH165-J7A3A AH164-J6B3A AH165-J7A3A AH165-J7A3A AH164-J7A2A AH165-J7A2A AH165-J7A2A AH164-J7ABA AH165-J7A2A AH165-J7A2A AH164-J7ABA AH165-J7ABA AH165-J7ABA AH164-J7ABA AH165-J7ABA AH165-J3BAB AH165-JBABA AH165-JBBBA AH165-JBBBA AH165-JBBBA AH165-JBBAB AH165-JBBBA AH165-JBBBA AH165-JBBBA AH165-JBBBA					AH164-SP1B33	AH165-SP1B33	
Spring	-	Maintained*	⊖⊿				
Spring/manual return	rectangular bezel						
Spring/manual return			① F		AH164-J3E22A	AH165-J3E22A	
Spring			_				
Spring			⊖n			AH165-J3D22A	
Spring/manual return						AH165-J3D33A	
Spring/manual return			⊕ c	2NO+2NC	AH164-J3C22A	AH165-J3C22A	4 (max.)
Spring	-			3NO+3NC	AH164-J3C33A	AH165-J3C33A	
Manual return		Spring/	① F		AH164-J6E22A	AH165-J6E22A	
Spring/manual return	3				AH164-J6E33A	AH165-J6E33A	42.5
Spring		(1)	⊖n		AH164-J6D22A	AH165-J6D22A	
Maintained*					AH164-J6D33A	AH165-J6D33A	
Maintained			⊖△				
Spring return Spring return E SNO+3NC AH164-J7E33A AH165-J7E33A AH165-S733A			<i>A</i>	3NO+3NC	AH164-J7A33A	AH165-J7A33A	
Spring return Spring return E 2NO+2NC AH164-J1E32A AH165-J1E33A AH165-J1E33A		₫	① F				
SK-1098 return			_				
Sk-1098 return			① F		AH164-J1E22A	AH165-J1E22A	
bezel		Totalli	_				
Spring/manual return	Key with square	Maintained*	⊖⊿				
Spring/ manual return	bezel						4
Spring/manual return			① F				
3NO+3NC							
## C 2NO+2NC AH164-SJ3C32A AH165-SJ3C32A AH165-SJ3C33A AH165-SJ3C33A AH165-SJ3C33A AH165-SJ3C33A AH165-SJ3C33A AH165-SJ3C33A AH165-SJ3C33A AH165-SJ6E22A AH165-SJ6E3A AH165-SJ6E3A AH165-SJ6E3A AH165-SJ6E3A AH165-SJ6D3A AH164-SJ6D33A AH165-SJ6D33A AH165-SJ6D33A AH165-SJ6D33A AH165-SJ6D33A AH165-SJ6D33A AH165-SJ7A33A AH165-SJ7A33A AH165-SJ7A33A AH165-SJ7A33A AH165-SJ7A33A AH165-SJ7A33A AH165-SJ7A33A AH165-SJ7B33A AH165-SJ7B33A AH165-SJ7B33A AH165-SJ7B33A AH165-SJ7B33A AH165-SJ7B33A AH165-SJ7E33A AH165-S			⊖n		AH164-SJ3D22A	AH165-SJ3D22A	
⊕ C 2NO+2NC AH164-SJ3C22A AH165-SJ3C22A Spring/ manual return ⊕ E 2NO+2NC AH164-SJ6E22A AH165-SJ6E22A AH164-SJ6E33A AH165-SJ6E33A AH165-SJ6E33A AH165-SJ6E33A AH165-SJ6E33A AH165-SJ6D22A AH165-SJ6D22A AH165-SJ6D33A AH165-SJ6D33A Spring/ manual return ⊕ A 2NO+2NC AH164-SJ6D33A AH165-SJ7A22A manual return ⊕ A 3NO+3NC AH164-SJ7A22A AH165-SJ7A22A AH165-SJ7A33A AH165-SJ7E33A AH165-SJ7E33A AH165-SJ7E33A Spring ⊕ E 2NO+2NC AH164-SJ7E33A AH165-SJ7E33A Spring ⊕ E 2NO+2NC AH164-SJ7E33A AH165-SJ7E33A AH165-SJ7E33A AH165-SJ7E33A AH165-SJ7E33A AH165-SJ7E33A AH165-SJ7E33A							
Spring/manual return	- Sagar		⊕ C				Nut \ \-\
## Spring/ manual return □ E 2NO+2NC AH164-SJ6E33A AH165-SJ6E33A AH165-SJ6D22A AH164-SJ6D22A AH165-SJ6D22A AH165-SJ6D22A AH165-SJ6D33A AH165-SJ6D33A AH165-SJ6D33A AH165-SJ7A33A AH164-SJ7A33A AH165-SJ7A33A AH165-SJ7A33A AH164-SJ7A33A AH165-SJ7E33A AH165-SJ7E3A AH165-SJ7E3A AH165-SJ7E3A AH165-SJ7E3A AH165-SJ7E3A AH165-SJ7E3A AH165-SJ7E3A AH165-SJ7E3A AH165-SJ7	TO BE						
Manual return		Spring/	① F				
O		manual return	_				42.5 8.5 25.5
Spring/manual return		Ó	⊖D				10.5
manual return	E James						
manual return		1 ' "	⊖△				
3NO+3NC AH164-SJ7E33A AH165-SJ7E33A		manual return			AH164-SJ7A33A	AH165-SJ7A33A	
3NO+3NC AH164-SJ7E33A AH165-SJ7E33A Spring		(1)	① _	2NO+2NC	AH164-SJ7E22A	AH165-SJ7E22A	
			- L				
SK-1132 return ① 3NO+3NC AH164-SJ1E33A AH165-SJ1E33A			⊕ ⊏	2NO+2NC	AH164-SJ1E22A	AH165-SJ1E22A	
	SK-1132	return ①		3NO+3NC	AH164-SJ1E33A	AH165-SJ1E33A	

- * Available key removable position: Code B ⊕
 With wire-wrap pin terminals have a depth of 47mm.

<sup>There are 6 available key types; A, B, C, D, E and F. Standard key code is A.
Contact arrangement and operator position: See page 147.
Spring return, spring/manual return (spring return): Operation angle 70-degree</sup>

Selector Switches **AH164 and AH165**

■ Selector switches/3-position (45-degree)

■ Selector switch	nes/3-position	(45-degre	e)			
Operator	Operation	Key	Contact	AH164 type	AH165	Dimensions, mm
		removable			(oil-tight) type	
17 1 20		position	0110 0110	ALLIA O A DIVODOO	ALLIANT DIVODOS	
Knob with	Maintained	_	2NO+2NC	AH164-PK3B22	AH165-PK3B22	
rectangular bezel	0 : / 4		3NO+3NC	AH164-PK3B33	AH165-PK3B33	Washer Panel thickness
	Spring/ 🕆	_	2NO+2NC	AH164-PK6B22	AH165-PK6B22	Nut 4 (max.)
	manual return		3NO+3NC	AH164-PK6B33	AH165-PK6B33	
	Spring/	_	2NO+2NC	AH164-PK7B22	AH165-PK7B22	
	manual return		3NO+3NC	AH164-PK7B33	AH165-PK7B33	8.5
01/, 1000	Spring return	_	2NO+2NC	AH164-PK1B22	AH165-PK1B22	42.5 18.5
SK-1099			3NO+3NC	AH164-PK1B33	AH165-PK1B33	
Knob with square	Maintained	_	2NO+2NC	AH164-SPK3B22	AH165-SPK3B22	
bezel	Our wire and A		3NO+3NC	AH164-SPK3B33	AH165-SPK3B33	Panel thickness Washer 4 (max.)
	Spring/ 🕆	_	2NO+2NC	AH164-SPK6B22	AH165-SPK6B22	Nut
	manual return		3NO+3NC	AH164-SPK6B33	AH165-SPK6B33	
The state of the s	Spring/	_	2NO+2NC	AH164-SPK7B22	AH165-SPK7B22	
	manual return		3NO+3NC	AH164-SPK7B33	AH165-SPK7B33	42.5 18.5 18sq.
01/, 44.00	Spring return	_	2NO+2NC	AH164-SPK1B22	AH165-SPK1B22	 12.0 10.0
SK-1133	<u> </u>		3NO+3NC	AH164-SPK1B33	AH165-SPK1B33	
Key with	Maintained	⊗ A	2NO+2NC	AH164-JK3A22A	AH165-JK3A22A	
rectangular bezel			3NO+3NC	AH164-JK3A33A	AH165-JK3A33A	
		① E	2NO+2NC	AH164-JK3E22A	AH165-JK3E22A	
			3NO+3NC	AH164-JK3E33A	AH165-JK3E33A	
		⊘ D	2NO+2NC	AH164-JK3D22A	AH165-JK3D22A	
			3NO+3NC	AH164-JK3D33A	AH165-JK3D33A	Washer Panel thickness 4 (max.)
		® C	2NO+2NC	AH164-JK3C22A	AH165-JK3C22A	Nut \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
	On vin or /		3NO+3NC	AH164-JK3C33A	AH165-JK3C33A	
	Spring/	① E	2NO+2NC	AH164-JK6E22A	AH165-JK6E22A	
The state of the s	manual return		3NO+3NC	AH164-JK6E33A	AH165-JK6E33A	42.5 8.5 25.5
	₫	⊘ D	2NO+2NC	AH164-JK6D22A	AH165-JK6D22A	10.5
	Carinal		3NO+3NC 2NO+2NC	AH164-JK6D33A	AH165-JK6D33A	
	Spring/ manual return	⊗ A	3NO+3NC	AH164-JK7A22A AH164-JK7A33A	AH165-JK7A22A	
			2NO+2NC	AH164-JK7E22A	AH165-JK7A33A AH165-JK7E22A	
	₫	① E	3NO+3NC	AH164-JK7E33A	AH165-JK7E33A	
	Spring		2NO+2NC	AH164-JK1E22A	AH165-JK1E22A	
SK-1098	return ①	① E	3NO+3NC	AH164-JK1E33A	AH165-JK1E33A	
Key with square	Maintained		2NO+2NC	AH164-SJK3A22A		
bezel	Wallitallied		3NO+3NC	AH164-SJK3A33A		
Dezei			2NO+2NC	AH164-SJK3E22A		1
		① E		AH164-SJK3E33A		
						4
		⊘ D		AH164-SJK3D33A		Danal thickness
				AH164-SJK3C22A		Wasilei A (may)
		® C		AH164-SJK3C33A		l \ \
	Spring/		2NO+2NC	AH164-SJK6E22A		
100	manual return	① E	3NO+3NC	AH164-SJK6E33A		
			2NO+2NC	AH164-SJK6D22A		1880
	Ó	⊘ D	3NO+3NC	AH164-SJK6D33A		
	Spring/		2NO+2NC	AH164-SJK7A22A		1
	manual return	⊗ A	3NO+3NC	AH164-SJK7A33A		
			2NO+2NC	AH164-SJK7E22A		1
	•	① E	3NO+3NC	AH164-SJK7E33A		
	Spring		2NO+2NC	AH164-SJK1E22A		1
SK-1132	return ①	① E	3NO+3NC	AH164-SJK1E33A		
	1.0.0	İ	3,13,10,10	ZORIEGOA		1

<sup>There are 6 available key types; A, B, C, D, E and F. Standard key code is A.
Contact arrangement and operator position: See page 147.</sup>



•Key removable positions (JK, SJK)


Remvable position		\boxtimes	X	\varnothing	1	X	\$
Code	А	В	С	D	E	F	G

Operation code	Key removable position
3	A, B, C, D, E, F, G D, E, F A, E, G
6	D, E, F
7	A, E, G
1	E

·Key code No.

There are 6 available key types; A, B, C, D, E and F. Standard key code is A.

· Contact block position



· Contact arrangement and operator position:

3-position selector switch

Contact arrange- ment		2NO+2NC	3NO+3NC				
Operator position	Left	1 O I O 2 1 O O 2 3 O O 4 3 O O 4	10 10 10 02 10 02 30 04 30 04 30 04				
	Center	1 <u>0 0</u> 2 1 <u>0 0</u> 2 30 04 30 04	10 1 02 10 1 02 10 1 02 30 04 30 04 30 04				
	Right	10 02 10 1 02 30 04 30 04	10 02 10 02 1 <u>0 1 02</u> 30 04 30 04 30 04				

Pilot Lights AH164 and AH165


■ Pilot lights/without transformer

Filot lights/with	out transionine				
Lens	Lamp	Voltage	AH164 type	AH165 (oil-tight) type	Dimensions, mm
Extended round	Flat LED	24V DC	AH164-Z□E3	AH165-Z□E3	Wesher Panel thickness
a.	Spot LED	24V DC	AH164-Z□E2	AH165-Z□E2	Washer 4 (max.)
	Red/green LED	24V DC	AH164-ZRGE3inued	AH165-ZRGE3nued Mar. 2007	a (+) 🕞 💮 💮
	Incandescent	24V AC/DC	AH164-Z□E	AH165-Z□E	
	Neon	110V AC	AH164-Z□H1	AH165-Z□H1	24 7 18sq.
SK-1139		220V AC	AH164-Z□M1	AH165-Z□M1	- 10 - - 10 -
Flush square	Flat LED	24V DC	AH164-ZS□E3	AH165-ZS□E3	Washar Panel thickness
-0	Spot LED	24V DC	AH164-ZS□E2	AH165-ZS□E2	Washer Hamax.)
	Red/green LED	24V DC	AH164-ZSRGE3ued	AH165-ZSRGE3	a (+) (-) (-) (-) (-) (-) (-) (-) (-) (-) (-
	Incandescent	24V AC/DC	AH164-ZS□E	AH165-ZS□E	
	Neon	110V AC	AH164-ZS□H1	AH165-ZS□H1	24 7 15sq. 18sq.
SK-1138		220V AC	AH164-ZS□M1	AH165-ZS□M1	10 18sq.
Flush rectangular	Flat LED	24V DC	AH164-ZT□E3	AH165-ZT□E3	Washer, Panel thickness
	Spot LED	24V DC	AH164-ZT□E2	AH165-ZT□E2	Nut 4 (max.)
	Red/green LED	24V DC	AH164-ZTRGE3 ued	AH165-ZTRGE3	a (+) ©
	Incandescent	24V AC/DC	AH164-ZT□E	AH165-ZT□E	
SK-1137	Neon	110V AC	AH164-ZT□H1	AH165-ZT□H1	24 7 10 21 24
		220V AC	AH164-ZT□M1	AH165-ZT□M1	
Dome	LED	12V DC	- 30	AH165-ZM□B2	Nut Panel thickness
		24V DC	O(())	AH165-ZM□E2	a (+) 1sq. 1sq. 1sq. 1sq. 1sq. 1sq. 1sq. 1sq.
AF87-45					31.3 14.2 LED

Note: • The only color codes used for red/green LEDs are R and G. The color lens is transparent.

Red/green LEDs do not have high-brightness specifications.

Relationship between luminous color and terminal



Replace the \square mark by the following lens color code

				J			
	Color	Green	Red	White	Yellow	Blue	Orange
	Code	G	R	W	Υ	S	0

- The color lens is made of a tinted transparent material.
 A white pilot lights is fitted with a transparent color lens. (Except the neon lamp and dome).
- · With wire-wrap pin terminals have a depth of 29mm. (Except for ZM type)

· Lamp voltage

Voltages other than above are available

Code	LED	Incandescent	Neon
AA A B K	5V DC 6V DC 12V DC		_ _ _ _ 120V AC
Р	_	_	240V AC

Note: Except for ZM types and red/green LED types

■ Pilot lights/with transformer

Lens	Lamp	Voltage	AH164 type	AH165 (oil-tight) type	Dimensions, mm
Extended square	Flat LED	■ Voltage H: 100-110V AC M:	AH164-Z□ ■ 3	AH165-Z□ ■ 3	Panel thickness Washer Nut Insulation cover
AF90-944	Incandescent	200-220V AC	AH164-Z□■	AH165-Z□ ■	Transformer primary terminal Transformer unit
Flush square	Flat LED	■ Voltage H: 100-110V AC M: 200-220V AC	AH164-ZS□■3	AH165-ZS□ ■ 3	Panel thickness Washer 4 (max.) 18 15 Insulation cover
AF90-943	Incandescent		AH164-ZS□■	AH165-ZS□■	Transformer primary terminal Transformer unit
Flush rectangular	Flat LED	■ Voltage H: 100-110V AC	AH164-ZT□ ■ 3	AH165-ZT□ ■ 3	Panel thickness Washer Nut 1
AF90-942	Incandescent	M: 200-220V AC	AH164-ZT□■	AH165-ZT□■	Transformer description of the state of the

Replace the $\hfill\square$ mark by the following lens color code

Color	Green	Red	White	Yellow	Blue	Orange
Code	G	R	W	Υ	S	0

- The color lens is made of a tinted transparent material.
 A white pilot lights is fitted with a transparent color lens.



Buzzers AH164 and AH165

■ Buzzers

Sound	Operating voltage	Туре	Dimensions, mm
Standard	6V AC	AH164-TXBAAC	Short-circuit terminal Connected: Intermittent sound Not connected: Continuous sound Nut
U. M	6V DC	AH164-TXBADC	28 (A (+)
Win	12 to 24V AC/DC	AH164-TXBE	Panel thickness 1 24 24 24 24 24 25 25 26 26 27 28 28 28 28 28 28 28 28 28 28 28 28 28
AF87-317	35 to 48V AC/DC	AH164-TXBF	Terminal: Tab/solder type the buzzers with washers is 5mm
Loud sound	6V AC	AH164-TX1BAAC	Short-circuit terminal Connected: Intermittent sound Not connected: Continuous sound Washer
	6V DC	AH164-TX1BADC	
17	12 to 24V AC/DC	AH164-TX1BE	Panel thickness 5 (max.) 10 21 24
AF87-44	35 to 48V AC/DC	AH164-TX1BF	7.5 37.5 15
Loud sound with volume control	6V AC/DC	AH164-TX2BA	Volume Clockwise: Increase sound pressure Connected: Intermittent sound Not connected: Continuous sound Volume Clockwise: Increase sound pressure Counterclockwise: Decrease sound pressure
	12 to 24V AC/DC	AH164-TX2BE	9 29.5 Panel
AF93-297	35 to 48V AC/DC	AH164-TX2BF	thickness 5 (max.) LED (red)
Standard sound with volume control (IP54)	6V AC/DC	AH165-XBA	Volume Clockwise: Increase sound pressure Counterclockwise: Decrease sound pressure Short-circuit terminal Connected: Intermittent sound Not connected: Continuous sound
	12 to 24V AC/DC	AH165-XBE	Not connected: Continuous sound Panel thickness 5 (max.)
AF96-243	35 to 48V AC/DC	AH165-XBF	9 37 15.5 024

Pushbuttons/Selectors/Pilot Lights/Buzzers


AH164 and AH165 Mounting space

■ Mounting space, mm


Pushbuttons and pilot lights Extended round head or lens

Panel cutting ø16.2


Flush square head or lens




Flush rectangular head or lens




Mushroom head



Convex square head




Convex rectangular head




· Selector switches

·When mounting the selector switches near the pilot light




· When mounting the JM or RJM selector switches


· When mounting the selector switches near each other



· With transformer




· When mounting the JM or RJM selector switches near the other selector switch, pushbutton switch



Note: *() For switch with flush rectangular head

near each other (2NO+2NC only)

and pilot lights




Note: * Mushroom, convex square, convex rectangular: 27

■ Terminal number


· AH164, 165

Туре	Wiring	Terminal position
Illuminated pushbuttons	a b (+) (-) (-) (-) (-) (-) (-) (-) (-) (-) (-	
Pushbuttons Selector switches (except for JM, RJM types)	① <u>·</u> · · · ②② ③· · · ④] [] [] [] [] [] [] [] [] [] [
Pilot lights (without transformer)	a b (+) (-)	Type number display side

· AH165-V, V1, V5, V6



· AH165-JM, RJM



Pushbuttons/Selectors/Pilot Lights AH165-2 Part number system

■ Part number system

Pushbuttons, illuminated pushbuttons and pilot lights

① Product category

AH165-2: Oil-tight (Large operator)

② Operator or lens

· Operator for illuminated pushbutton

FL: Flush round head

FL5: Flush round head (Alternate)

SFL: Flush square head

SFL5: Flush square head (Alternate)

EL: Extended round head

EL5: Extended round head (Alternate)

SEL: Extended square head

SEL5: Extended square head (Alternate)

SCL: Concave square head

SCL5: Concave square head (Alternate)

ML: Mushroom head

YML: Mushroom head with square bezel

VL: Push-lock, turn-reset

YVL: Push-lock, turn-reset with square bezel

· Operator for pushbuttons

F: Flush round head

F5: Flush round head (Alternate)

SF: Flush square head

SF5: Flush square head (Alternate)

E: Extended round head

E5: Extended round head (Alternate)

SE: Extended square head

SE5: Extended square head (Alternate)

SCE: Concave square head

SCE5: Concave square head (Alternate)

M: Mushroom head

YM: Mushroom head with square bezel

V: Push-lock, turn-reset

YV: Push-lock, turn-reset with square bezel

S2: With selector ring

YS2: With selector ring with square bezel

· Lens for pilot lights

Z: Flush round

SZ: Flush square

ZE: Extended round

SEZ: Extended square

3 Color of button or lens

Code	Color	Button	LED	Incandescent	Neon
G	Green	0	0	0	0
R	Red	0	0	0	○ (Orange)
В	Black*	0	_	_	_
Υ	Yellow	0	0	0	○ (Orange)
W	White	0	○ (Orange)	0	○ (Orange)
S	Blue	0	0	0	○ (Green)
0	Orange	0	O (Amber)	0	0

Notes: • (): indicates luminous color

Contact arrangement (except pilot lights)

11: 1NO+1NC 22: 2NO+2NC 33: 3NO+3NC

⑤ Lamp voltage

Code	LED	Incandescent	Neon
AA	5V DC	_	_
A	6V DC	5V AC/DC	_
В	12V DC	12V AC/DC	_
E	24V DC	24V AC/DC	_
Н	_	_	110V AC
K	_	_	120V AC
M	_	_	220V AC
Р	-	_	240V AC

6 Type of lamp

Blank: Incandescent

1: Neon 3: Flat LED

7 Terminal

Blank: Solder/tab W: Wire-wrap

^{*} Not available for illuminated types



Pushbuttons/Selectors/Pilot Lights **AH165-2**

Part number system

■ Part number system

Selector switches

<u>AH165-2</u> <u>J</u> <u>2</u> <u>B</u> <u>11</u> <u>A</u> – <u>W</u> \bigcirc

1 Product category

AH165-2: Oil-tight (Large operator)

② Operator

· Knob and key type

2-position (operating angle 90°)

P: Knob

YP: Knob with square bezel

J: Key

YJ: Key with square bezel

3-position (operating angle 45°)

P: Knob

YP: Knob with square bezel

J: Key

YJ: Key with square bezel

· Lever type

2-position (operating angle 45°)

H: Lever

SH: Lever with square bezel

Note: The operation angle is 45° on the upper and lower side.

③ Operation

2: 2-position, maintained

0: 2-position, spring return*

3: 3-position, maintained

6: 3-position, spring/manual return (Left to center)

7: 3-position, spring/manual return (Right to center)

1: 3-position, spring return Note: * Except for H and SH types

4 Color of knob, lever or key removable position

· Color of knob or lever

B: Black

· Key removable position

Code	2-position		3-position			
	2	0	1	3	6	7
Α	\bigcirc	\bigcirc	_	\bigcirc	_	\bigcirc
В	\otimes	_	_	\otimes	_	_
С	_	_	_	*	-	_
D	Ø	_	_	\bigcirc		_
E	_	_	1			
F	_	_	_	(P)		_
G	_	_	_	₫)	_	(\$)

⑤ Contact arrangement

11: 1NO+1NC* 22: 2NO+2NC

33: 3NO+3NC

Note: * Except for 3-position

6 Key type No.

A (standard), B, C, D, E, F

7 Terminal

Blank: Solder/tab W: Wire-wrap

Illuminated selector switches

① Product category

AH165-2: Oil-tight (Large operator)

2 Operator

· 2-position (operating angle 90°)

PL: Knob

• 3-position (operating angle 45°)

PL: Knob

③ Operation

2: 2-position, maintained

3: 3-position, maintained

4 Color of knob

Code	Color	LED	Incandescent	Neon
G	Green	0	0	0
R	Red	0	0	○ (Orange)
Υ	Yellow	0	0	○ (Orange)
W	White	○ (Orange)	0	○ (Orange)
S	Blue	0	0	○ (Green)
0	Orange	○ (Amber)	0	0

Notes: • (): indicates luminous color

• The part other than the arrow of the knob is black.

⑤ Contact arrangement

11: 1NO+1NC* 22: 2NO+2NC

Note: * Except for 3-position

6 Lamp voltage

Code	LED	Incandescent	Neon
AA	5V DC	_	_
Α	6V DC	5V AC/DC	_
В	12V DC	12V AC/DC	_
B E	24V DC	24V AC/DC	_
Н	_	_	110V AC
K	_	_	120V AC
M	_	_	220V AC
Р	_	_	240V AC

Type of lamp

Blank: Incandescent

1: Neon

3: Flat LED

Note: Terminal with solder/tab only

Pushbuttons/Selectors/Pilot Lights **Ratings and specifications**

■ Standards approved

UL508	File No. E44592
CSA C22.2 No.14	File No. LR20479 (except for AH165-2Z, 2ZE, 2SZ, 2SZE)
	File No. LR84365 (for AH165-2Z, 2ZE, 2SZ, 2SZE)
TÜV: EN60947-5-1	Pushbutton, illuminated pushbutton: R9250087
	Selector (except for AH165-2H, SH), illuminated selector: R9250088
	Selector (for AH165-2H, SH): R9250087
	Pilot lights: R9250089

■ Specifications (Indoor use)

Item	AH165-2				
Rated insulation voltage	250V AC/DC				
Ambient temperature (no condensation or no icing)	-10 to +70°C *1				
Humidity	45 to 85%RH (at –5 to +40°C), no condensation or no icing				
Durability Mechanical (operations) Electrical	Pushbutton and illuminated pushubutton switch Momentary action: 1 million Alternate action: 250,000 Push-lock, turn-reset: 100,000 With selector ring: 250,000 Selector and illuminated selector switch: 250,000*2 100,000 (220V AC 0.7A)				
Dielectric strength	2000V AC, 1 minute (Between lamp and contact terminals: 1500V AC, 1 minute)				
Conditional short-circuit current	1000A				
Short-circuit protective device	Fuse 1A				
Pollution degree	3				
Vibration	Resonance: 10 to 55Hz, double amplitude 0.1mm Constant: 16.7Hz, double amplitude 3mm				
Shock	Malfunction durability: 100m/s² Mechanical durability: 500m/s²				
Operating frequency	1200 operation/hour (on-load factor: 40%)				
Insulation resistance	100MΩ or more (500V DC megger)				
Operator protection	IP65				

Notes: *1 For illuminated pushbutton, illuminated selector switch and pilot light: -10 to +55°C
*2 Key insertion/removal durability for selector switch key types: 10,000

■ Contact ratings

See page 135

■ Lamp ratings

Rated operational	Consumption				
voltage	LED DC	Incandescent AC/DC	Neon AC		
5V	14mA (Yellow: 28mA)	0.45W (6V)	_		
6V	14mA (Yellow: 28mA)	-	—		
12V	14mA	0.55W (14V)	_		
24V	14mA	0.55W (28V)	—		
110V	-	-	0.19VA		
120V	_	_	0.21VA		
220V	_	_	0.38VA		
240V	_	_	0.42VA		

Notes: For the incandescent lamps, the values in parentheses indicate the rated voltage of the lamps.

■ Contact reliability

FUJI has confirmed that the unit can be used in 1mA circuit conditions at 5V AC or DC. The operable range may vary depending on the ambient conditions and type of load.



Illuminated Pushbutton Switches **AH165-2**

■ Illuminated pushbutton switches

Operator	Lamp	Voltage	Contact	Momentary action	Alternate action	Dimensions, mm
•	·			Туре	Туре	1
Flush round head	Flat LED	24V DC	1NO+1NC	AH165-2FL□11E3	AH165-2FL5□11E3	
			2NO+2NC	AH165-2FL□22E3	AH165-2FL5□22E3	Panel thickness 1 to 5
			3NO+3NC	AH165-2FL□33E3	AH165-2FL5□33E3	
	Incandescent	24V AC/DC	1NO+1NC	AH165-2FL□11E	AH165-2FL5□11E	
			2NO+2NC	AH165-2FL□22E	AH165-2FL5□22E	42.5 11.5 020
			3NO+3NC	AH165-2FL□33E	AH165-2FL5□33E	# # # # @25 * J
	Neon	110V AC	1NO+1NC	AH165-2FL□11H1	AH165-2FL5□11H1	
			2NO+2NC	AH165-2FL□22H1	AH165-2FL5□22H1	
			3NO+3NC	AH165-2FL□33H1	AH165-2FL5□33H1	
AF87-211		220V AC	1NO+1NC	AH165-2FL□11M1	AH165-2FL5□11M1	
			2NO+2NC	AH165-2FL□22M1	AH165-2FL5□22M1	
			3NO+3NC	AH165-2FL□33M1	AH165-2FL5□33M1	
Extended round head	Flat LED	24V DC	1NO+1NC	AH165-2EL□11E3	AH165-2EL5□11E3	5 1000
			2NO+2NC	AH165-2EL□22E3	AH165-2EL5□22E3	Panel thickness 1 to 5
			3NO+3NC	AH165-2EL□33E3	AH165-2EL5□33E3	
~40.	Incandescent	24V AC/DC	1NO+1NC	AH165-2EL□11E	AH165-2EL5□11E	
1000			2NO+2NC	AH165-2EL□22E	AH165-2EL5□22E	11.5 42.5 15 920 925
			3NO+3NC	AH165-2EL□33E	AH165-2EL5□33E	42.5 15 025
	Neon	110V AC	1NO+1NC	AH165-2EL□11H1	AH165-2EL5□11H1	
			2NO+2NC	AH165-2EL□22H1	AH165-2EL5□22H1	
			3NO+3NC	AH165-2EL□33H1	AH165-2EL5□33H1	
AF87-210		220V AC	1NO+1NC	AH165-2EL□11M1	AH165-2EL5□11M1	
		2201710	2NO+2NC	AH165-2EL□22M1	AH165-2EL5□22M1	
			3NO+3NC	AH165-2EL□33M1	AH165-2EL5□33M1	
Mushroom head	Flat LED	24V DC	1NO+1NC	AH165-2ML□11E3	_	
			2NO+2NC	AH165-2ML□22E3	_	Panel thickness 1 to 5
			3NO+3NC	AH165-2ML□33E3	_	
	Incandescent	24V AC/DC	1NO+1NC	AH165-2ML□11E	_	
	I I I I I I I I I I I I I I I I I I I		2NO+2NC	AH165-2ML□22E	_	42.5
			3NO+3NC	AH165-2ML□33E	_	
	Neon	110V AC	1NO+1NC	AH165-2ML□11H1	1_	
	110011	11017,10	2NO+2NC	AH165-2ML□22H1	_	
			3NO+3NC	AH165-2ML□33H1	_	
AF87-221		220V AC	1NO+1NC	AH165-2ML□11M1	_	
			2NO+2NC	AH165-2ML□22M1	_	
			3NO+3NC	AH165-2ML□33M1	_	
Mushroom head	Flat LED	24V DC	1NO+1NC	AH165-2YML□11E3	_	
with square bezel	Tax 223		2NO+2NC	AH165-2YML□22E3	_	Panel thickness 1 to 5
with oquaro bozor			3NO+3NC	AH165-2YML□33E3	_	
	Incandescent	24V AC/DC	1NO+1NC	AH165-2YML□11E	_	
	in our doodent	210 / 10/20	2NO+2NC	AH165-2YML□22E	_	42.5 11.5 22 25sq.
			3NO+3NC	AH165-2YML□33E	_	
	Neon	110V AC	1NO+1NC	AH165-2YML□11H1	- -	
	1,0011	1104 70	2NO+2NC	AH165-2YML□22H1	_	
			3NO+3NC	AH165-2YML□33H1	_	
AF87 - 220		220V AC	1NO+1NC	AH165-2YML□11M1	_	1
		220 V AC	2NO+2NC			
				AH165-2YML□22M1	_	
			3NO+3NC	AH165-2YML□33M1	_	

Note: Replace the \square mark by the following color code, *see page 157*.

Illuminated Pushbutton Switches AH165-2

■ Illuminated pushbutton switches

Operator	Lamp	Voltage	Contact	Momentary action	Alternate action	Dimensions, mm
				Туре	Туре	
Flush square head	Flat LED	24V DC	1NO+1NC	AH165-2SFL□11E3	AH165-2SFL5□11E3	
			2NO+2NC	AH165-2SFL□22E3	AH165-2SFL5□22E3	Panel thickness 1 to 5
			3NO+3NC	AH165-2SFL□33E3	AH165-2SFL5□33E3	
	Incandescent	24V AC/DC	1NO+1NC	AH165-2SFL□11E	AH165-2SFL5□11E	
1000			2NO+2NC	AH165-2SFL□22E	AH165-2SFL5□22E	42.5 11.5 25sq.
100			3NO+3NC	AH165-2SFL□33E	AH165-2SFL5□33E	
	Neon	110V AC	1NO+1NC	AH165-2SFL□11H1	AH165-2SFL5□11H1	
			2NO+2NC	AH165-2SFL□22H1	AH165-2SFL5□22H1	
			3NO+3NC	AH165-2SFL□33H1	AH165-2SFL5□33H1	
AF87-201		220V AC	1NO+1NC	AH165-2SFL□11M1	AH165-2SFL5□11M1	
			2NO+2NC	AH165-2SFL□22M1	AH165-2SFL5□22M1	
			3NO+3NC	AH165-2SFL□33M1	AH165-2SFL5□33M1	<u> </u>
Extended square	Flat LED	24V DC	1NO+1NC	AH165-2SEL□11E3	AH165-2SEL5□11E3	
head			2NO+2NC	AH165-2SEL□22E3	AH165-2SEL5□22E3	Panel thickness 1 to 5
			3NO+3NC	AH165-2SEL□33E3	AH165-2SEL5□33E3	
	Incandescent	24V AC/DC	1NO+1NC	AH165-2SEL□11E	AH165-2SEL5□11E	
			2NO+2NC	AH165-2SEL□22E	AH165-2SEL5□22E	11.5 42.5 15 25sq.
			3NO+3NC	AH165-2SEL□33E	AH165-2SEL5□33E	- 42.5 15
The second	Neon	110V AC	1NO+1NC	AH165-2SEL□11H1	AH165-2SEL5□11H1	
			2NO+2NC	AH165-2SEL□22H1	AH165-2SEL5□22H1	
			3NO+3NC	AH165-2SEL□33H1	AH165-2SEL5□33H1	
AF87-200		220V AC	1NO+1NC	AH165-2SEL□11M1	AH165-2SEL5□11M1	
			2NO+2NC	AH165-2SEL□22M1	AH165-2SEL5□22M1	
			3NO+3NC	AH165-2SEL□33M1	AH165-2SEL5□33M1	
Concave square	Flat LED	24V DC	1NO+1NC	AH165-2SCL□11E3	AH165-2SCL5□11E3	Denot this lynner 1 to 5
head			2NO+2NC	AH165-2SCL□22E3	AH165-2SCL5□22E3	Panel thickness 1 to 5
			3NO+3NC	AH165-2SCL□33E3	AH165-2SCL5□33E3	
	Incandescent	24V AC/DC	1NO+1NC	AH165-2SCL□11E	AH165-2SCL5□11E	
			2NO+2NC	AH165-2SCL□22E	AH165-2SCL5□22E	11.5 16.5 20sq. 25sq.
700			3NO+3NC	AH165-2SCL□33E	AH165-2SCL5□33E	
	Neon	110V AC	1NO+1NC	AH165-2SCL□11H1	AH165-2SCL5□11H1	
			2NO+2NC	AH165-2SCL□22H1	AH165-2SCL5□22H1	
			3NO+3NC	AH165-2SCL□33H1	AH165-2SCL5□33H1	
AF87-199		220V AC	1NO+1NC	AH165-2SCL□11M1	AH165-2SCL5□11M1	
			2NO+2NC	AH165-2SCL□22M1	AH165-2SCL5□22M1	
		•	3NO+3NC	AH165-2SCL□33M1	AH165-2SCL5□33M1	

Note: Replace the \square mark by the following color code, see page 157.



Illuminated Pushbutton Switches **AH165-2**

■ Illuminated pushbutton switches

Operator	Lamp	Voltage	Contact	Туре	Dimensions, mm
Push-lock, turn-reset	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH165-2VL□11E3 AH165-2VL□22E3 AH165-2VL□33E3	Panel thickness 1 to 5
	Incandescent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH165-2VL□11E AH165-2VL□22E AH165-2VL□33E	42.5
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH165-2VL□11H1 AH165-2VL□22H1 AH165-2VL□33H1	
AF87-219		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH165-2VL□11M1 AH165-2VL□22M1 AH165-2VL□33M1	
Push-lock, turn-reset with square bezel	Flat LED	24V DC	1NO+1NC 2NO+2NC 3NO+3NC	AH165-2YVL□11E3 AH165-2YVL□22E3 AH165-2YVL□33E3	Panel thickness 1 to 5
	Incandescent	24V AC/DC	1NO+1NC 2NO+2NC 3NO+3NC	AH165-2YVL□11E AH165-2YVL□22E AH165-2YVL□33E	42.5 11.5 22 25sq.
	Neon	110V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH165-2YVL□11H1 AH165-2YVL□22H1 AH165-2YVL□33H1	
AF87-218		220V AC	1NO+1NC 2NO+2NC 3NO+3NC	AH165-2YVL□11M1 AH165-2YVL□22M1 AH165-2YVL□33M1	

· Button color

Replace the \square mark by the following button color code

		,				
Color	Green	Red	White	Yellow	Blue	Orange
Code	G	R	W	Υ	S	0

• With wire-wrap pin terminals have a depth of 47mm.

- A white illuminated pushbutton is fitted with a transparent color lens.
- The color lens is made of a tinted transparent material.

· Lamp voltage

Voltages other than above are available

Code	LED	Incandescent	Neon
AA	5V DC	_	_
A	6V DC	5V AC/DC	_
B	12V DC	12V AC/DC	_
K	-	-	120V AC
P	-	-	240V AC



■ Pushbutton switches

Operator	Contact	Momentary action	Alternate action	Dimensions, mm
		Туре	Туре	
Flush round head	1NO+1NC	AH165-2F□11	AH165-2F5□11	Panel thickness 1 to 5
	2NO+2NC	AH165-2F□22	AH165-2F5□22	42.5
AF87-211	3NO+3NC	AH165-2F□33	AH165-2F5□33	025
Flush square head	1NO+1NC	AH165-2SF□11	AH165-2SF5□11	Panel thickness 1 to 5
	2NO+2NC	AH165-2SF□22	AH165-2SF5□22	42.5 11.5 2550
AF87-201	3NO+3NC	AH165-2SF□33	AH165-2SF5□33	42.5 ,11.5,1
Extended round head	1NO+1NC	AH165-2E□11	AH165-2E5□11	Panel thickness 1 to 5
	2NO+2NC	AH165-2E□22	AH165-2E5□22	
AF87-210	3NO+3NC	AH165-2E□33	AH165-2E5□33	42.5 11.5 - <u><u><u>o</u>20</u> <u>025</u></u>
Extended square head	1NO+1NC	AH165-2SE□11	AH165-2SE5□11	Panel thickness 1 to 5
	2NO+2NC	AH165-2SE□22	AH165-2SE5□22	
AF87-200	3NO+3NC	AH165-2SE□33	AH165-2SE5□33	42.5 11.5 25sq.
Concave square head	1NO+1NC	AH165-2SCE□11	AH165-2SCE5□11	Panel thickness 1 to 5
	2NO+2NC	AH165-2SCE□22	AH165-2SCE5□22	11.5 205q.
AF87-199	3NO+3NC	AH165-2SCE□33	AH165-2SCE5□33	11.5 20sq. 25sq.
Mushroom head	1NO+1NC	AH165-2M□11	_	Panel thickness 1 to 5
	2NO+2NC	AH165-2M□22	_	
AF87-215	3NO+3NC	AH165-2M□33	_	42.5
Mushroom head with square bezel	1NO+1NC	AH165-2YM□11	_	Panel thickness 1 to 5
	2NO+2NC	AH165-2YM□22	_	
AF87-214	3NO+3NC	AH165-2YM□33	_	42.5 11.5 22 25bq.

Note: Replace the \square mark by the following color code, see page 159.

Pushbutton Switches **AH165-2**

■ Pushbutton switches

Operator	Contact	Туре	Dimensions, mm
With selector ring AF87-207	2NO+2NC	AH165-2S2□22	Panel thickness 1 to 5
With selector ring with square bezel AF87-206	2NO+2NC	AH165-2YS2□22	Panel thickness 1 to 5 90' 42.5 11.5 22 22 25sq.
Push-lock, turn-reset	1NO+1NC 2NO+2NC 3NO+3NC	AH165-2V□11 AH165-2V□22 AH165-2V□33	Panel thickness 1 to 5
Push-lock, turn-reset with square bezel AF87-200	1NO+1NC 2NO+2NC 3NO+3NC	AH165-2YV□11 AH165-2YV□22 AH165-2YV□33	Panel thickness 1 to 5

· Button color

Replace the \square mark by the following button color code

Color	Green	Red	Black	White	Blue	Yellow	Orange
Code	G	R	В	W	S	Υ	0

• Contact arrangement and operator position AH165-2S, 2YS

Ring	Left		Right
Button			
Free	U	L	UL
	10 02 10	02	10 02 10 02
	30 04 30	O4	30 04 30 04
Depressed			
	10 02 10	02	10 02 10 02
	30 04 30	O4	30 04 30 04

- U: Upper contact block
- L: Lower contact block

- The color lens is made of a tinted transparent material. (Except for M, YM, V, YV, types)
- A white pushbutton is fitted with a transparent color lens. A black pushbutton consists of a transparent color lens and an attached black legend plate. (Except for M, YM, V, YV, types)
- With wire-wrap pin terminals have a depth of 47mm.

$\cdot \ \text{Terminal number and contact block position} \\$

Type number display side





■ Selector switches/2-position (90-degree)

Operator	Operation	Key removable position	Contact	Туре	Dimensions, mm
Knob	Maintained	_	1NO+1NC	AH165-2P2B11	
Tallob	Walitairiea		2NO+2NC	AH165-2P2B22	Panel thickness 1 to 5
			3NO+3NC	AH165-2P2B33	
	Spring return	_	1NO+1NC	AH165-2P0B11	
	' "		2NO+2NC	AH165-2P0B22	11.5
AF02-111	\bigcirc		3NO+3NC	AH165-2P0B33	42.5 24
Knob	Maintained	_	1NO+1NC	AH165-2YP2B11	
			2NO+2NC	AH165-2YP2B22	Panel thickness 1 to 5
			3NO+3NC	AH165-2YP2B33	
	Spring return	_	1NO+1NC	AH165-2YP0B11	
1	' "		2NO+2NC	AH165-2YP0B22	11.5 25sq.
AF02-112	\bigcirc		3NO+3NC	AH165-2YP0B33	42.5 24 25sq.
Key	Maintained		1NO+1NC	AH165-2J2A11A	
			2NO+2NC	AH165-2J2A22A	
			3NO+3NC	AH165-2J2A33A	Panel thickness 1 to 5
			1NO+1NC	AH165-2J2B11A	
		⊗ B	2NO+2NC	AH165-2J2B22A	
(33)			3NO+3NC	AH165-2J2B33A	
			1NO+1NC	AH165-2J2D11A	11.5 13.5 42.5 37
		⊘ D	2NO+2NC	AH165-2J2D22A	- 42.5 - - 3/ -
AF02-113			3NO+3NC	AH165-2J2D33A	
	Spring return		1NO+1NC	AH165-2J0A11A	
	\bigcirc		2NO+2NC	AH165-2J0A22A	
			3NO+3NC	AH165-2J0A33A	
Key with square bezel	Maintained		1NO+1NC	AH165-2YJ2A11A	
		♦ A	2NO+2NC	AH165-2YJ2A22A	
			3NO+3NC	AH165-2YJ2A33A	
			1NO+1NC	AH165-2YJ2B11A	Panel thickness 1 to 5
		⊗ B	2NO+2NC	AH165-2YJ2B22A	
			3NO+3NC	AH165-2YJ2B33A	
			1NO+1NC	AH165-2YJ2D11A	
		⊘ D	2NO+2NC	AH165-2YJ2D22A	11.5 13.5 42.5 37
AF02-114			3NO+3NC	AH165-2YJ2D33A	
	Spring return		1NO+1NC	AH165-2YJ0A11A	
	\bigcirc		2NO+2NC	AH165-2YJ0A22A	
			3NO+3NC	AH165-2YJ0A33A	

• The key can be removed only at the following positions:

A: 🕥

B:(X)



- For spring-return selector switches, the key can be removed at position A.
- There are 6 available key types; A, B, C, D, E and F. Standard key code is A.
- With wire-wrap pin terminals have a depth of 47mm.

• Terminal number and contact block position

Type number display side



Contact arrangement (terminal No.: common) 1NO+1NC: Middle

2NO+2NC: Upper, lower 3NO+3NC: Upper, middle, lower

$\cdot \ \, \text{Contact arrangement and operator positions:} \\$

2-position

Contact arrangement		1NO+1NC		2NO+2NC		3NO+3NC			
Operator position	Left	10_30	M		1 Q 3 O 1 Q 3 O	U L		10	O2 O4 O4 O4 O4 O4 L
	Right	10	M	O2 O4	10 30 10 30	U L	02 04 02 04	10 30 10 30 10 30	O2 O4 O2 O4 M O2 O4 L

U: Upper contact block

M: Middle contact block


L: Lower contact block

Selector Switches **AH165-2**

■ Selector switches/2-position

Operator	Lever color	Operation	Contact	Туре	Dimensions, mm
Lever	Black	Maintained	1NO+1NC	AH165-2H2B11	Panel thickness 1 to 5
			2NO+2NC	AH165-2H2B22	4
AF87-209			3NO+3NC	AH165-2H2B33	42.5 24 025
Lever with square bezel	Black	Maintained	1NO+1NC	AH165-2SH2B11	Panel thickness 1 to 5
			2NO+2NC	AH165-2SH2B22	4
AF87-203			3NO+3NC	AH165-2SH2B33	42.5 11.5 25sq.

· Contact arrangement and operator position




U: Upper contact block

M: Middle contact block

L: Lower contact block

• With wire-wrap pin terminals have a depth of 47mm.

· Terminal number and contact block position



Contact arrangement (terminal No.: common) 1NO+1NC: Middle

1NO+1NC: Middle 2NO+2NC: Upper, lower 3NO+3NC: Upper, middle, lower



■ Selector switches/3-position (45-degree)

Operator	Operation	Key removable position	Contact	Type	Dimensions, mm
Knob	Mainteined	_	2NO+2NC	AH165-2P3B22	
-44			3NO+3NC	AH165-2P3B33	Panel thickness 1 to 5
	Spring/	_	2NO+2NC	AH165-2P6B22	
	manual return		3NO+3NC	AH165-2P6B33	
	Spring/	_	2NO+2NC	AH165-2P7B22	
AF87-208	manual return		3NO+3NC	AH165-2P7B33	11.5
AF67-206	Spring return	_	2NO+2NC	AH165-2P1B22	42.5 24 025
			3NO+3NC	AH165-2P1B33	
Knob with square bezel	Mainteined	_	2NO+2NC	AH165-2YP3B22	
and a second			3NO+3NC	AH165-2YP3B33	Panel thickness 1 to 5
	Spring/	_	2NO+2NC	AH165-2YP6B22	
	manual return		3NO+3NC	AH165-2YP6B33	
	Spring/	_	2NO+2NC	AH165-2YP7B22	
11 (SIC) M	manual return		3NO+3NC	AH165-2YP7B33	11.5 25sq.
AF87-202	Spring return	_	2NO+2NC	AH165-2YP1B22	42.5 24 25sq.
	(I)		3NO+3NC	AH165-2YP1B33	
Key	Mainteined	⊗ A	2NO+2NC	AH165-2J3A22A	
5544			3NO+3NC	AH165-2J3A33A	
		① E	2NO+2NC	AH165-2J3E22A	
			3NO+3NC	AH165-2J3E33A	
		⊘ D	2NO+2NC	AH165-2J3D22A	
		₩	3NO+3NC	AH165-2J3D33A	
		(★ C	2NO+2NC	AH165-2J3C22A	Panel thickness 1 to 5
		₩ 0	3NO+3NC	AH165-2J3C33A	
	Spring/	① E	2NO+2NC	AH165-2J6E22A	
\	manual return		3NO+3NC	AH165-2J6E33A	
AF87-223	(1)	⊘ D	2NO+2NC	AH165-2J6D22A	11.5 13.5
		0.5	3NO+3NC	AH165-2J6D33A	42.5
	Spring/	⊗ a	2NO+2NC	AH165-2J7A22A	
	manual return	<u> </u>	3NO+3NC	AH165-2J7A33A	
	(1)	① E	2NO+2NC	AH165-2J7E22A	
		9 -	3NO+3NC	AH165-2J7E33A	
	Spring return	① E	2NO+2NC	AH165-2J1E22A	
	T. T.	<u> </u>	3NO+3NC	AH165-2J1E33A	
Key with square bezel	Mainteined	⊗ A	2NO+2NC	AH165-2YJ3A22A	
			3NO+3NC	AH165-2YJ3A33A	4
		① E	2NO+2NC	AH165-2YJ3E22A	
			3NO+3NC	AH165-2YJ3E33A	-
Ter .		⊘ D	2NO+2NC	AH165-2YJ3D22A	
		_	3NO+3NC	AH165-2YJ3D33A	Panel thickness 1 to 5
		® C	2NO+2NC	AH165-2YJ3C22A	
			3NO+3NC	AH165-2YJ3C33A	
	Spring/	① E	2NO+2NC	AH165-2YJ6E22A	
_	manual return	_	3NO+3NC	AH165-2YJ6E33A	11.5 13.5 25sq.
AF87-222		⊘ D	2NO+2NC	AH165-2YJ6D22A	42.5
	Spring/	_	3NO+3NC	AH165-2YJ6D33A	-
	Spring/		2NO+2NC	AH165-2YJ7A22A	
	manual return		3NO+3NC	AH165-2YJ7A33A AH165-2YJ7E22A	-
		(↑ E	2NO+2NC		
	Caring rature		3NO+3NC 2NO+2NC	AH165-2YJ7E33A	-
	Spring return	(↑ E		AH165-2YJ1E22A	
	oxdot		3NO+3NC	AH165-2YJ1E33A	

[•] The Key can be removed at the following positions:

 $A: \bigcirc \qquad B: \bigcirc \qquad C: \bigcirc \qquad D: \bigcirc \qquad E: \bigcirc \qquad F: \bigcirc \qquad G: \bigcirc \qquad$

For spring-return selector switches, the key can be removed only at position E. For manual/spring-return selector switches, the key can be removed at positions D, E and F for type J6, and position A, E and G for type J7.

- There are 6 available key types; A, B, C, D, E and F. Standard key code is A.
- With wire-wrap pin terminals have a depth of 47mm.

· Contact arrangement and operator positions:

Contact arrangement		2NO+2NC	3NO+3NC	
Operator	Left	10 LO2 10 LO2	10_L02 10 M 02 10 L 02	
position	\mathcal{O}	30 04 30 04	30 04 30 04 30 04	
	Center	10_102 10_102	10_102 10_102 10_102	
		30 04 30 04	30 04 30 04 30 04	
	Right _	10 02 10 102	10 02 10 02 10 02	
		30 04 30 04	30 04 30 04 30 04	

U: Upper contact block M: Middle contact block L: Lower contact block

[•] Contact block positions: See page 161

Selector Switches AH165-2


■ Illuminated selector switches

Operator	Operation	Lamp voltage	No. of positions	Contact	Туре	Dimensions, mm
Knob AF90-607	Maintained	Flat LED 24V DC	2	1NO+1NC 2NO+2NC 2NO+2NC	AH165-2PL2□11E3 AH165-2PL2□22E3 AH165-2PL3□22E3	025
		Incandescent 24V AC/DC	2	1NO+1NC 2NO+2NC 2NO+2NC	AH165-2PL2□11E AH165-2PL2□22E AH165-2PL3□22E	42.5
		Neon 110V AC	2	1NO+1NC 2NO+2NC 2NO+2NC	AH165-2PL2□11H1 AH165-2PL2□22H1 AH165-2PL3□22H1	
		Neon 220V AC	3	1NO+2NC 2NO+2NC 2NO+2NC	AH165-2PL2□11M1 AH165-2PL2□22M1 AH165-2PL3□22M1	

· Knob color (arrow)

Replace the \square mark by the following color code

Color	Green	Red	White	Blue	Yellow	Orange
Code	G	R	W	S	Υ	0





· Lamp voltage

Voltages other than above are available

Code	LED	Incandescent	Neon
AA A B K P	5V DC 6V DC 12V DC -	 5V AC/DC 12V AC/DC 	

· Terminal number and contact block position





Contact arrangement (terminal No.: common) 1NO+1NC: Middle

2NO+2NC: Upper, lower

· Contact arrangement and operator positions:

2-position

Contact arrangement		1NO+1NC	2NO+2NC
Operator position	Left 🚫	M ¹⁰ 02 30 04	U 10 102 30 04 L 10 02 30 04
	Right 🕢	M ₃₀ 02	U 10 02 30 04 L 10 02 30 04

3-positio	n		
Contact arrangement		ent	2NO+2NC
Operator position Left		\bigcirc	U 30 04
			L 10 02 30 04
	Center	1	U 10 102 30 04
			L 10 L 02 L 30 04
	Right	Ø	U 10 02 30 04
			L 10_L02 30_04

U: Upper contact block M: Middle contact block L: Lower contact block



■ Pilot lights

Lens		Lamp	Voltage	Туре	Dimensions, mm
Flush round		Flat LED	24V DC	AH165-2Z□E3	Panel thickness 1 to 5
		Incandescent	24V AC/DC	AH165-2Z□E	a (+) 📴
		Neon	110V AC	AH165-2Z□H1	b (-)
	AF87-213		220V AC	AH165-2Z□M1	24 11.5
Flush square		Flat LED	24V DC	AH165-2SZ□E3	Panel thickness 1 to 5
		Incandescent	24V AC/DC	AH165-2SZ□E	a (+) @ ;
	١	Neon	110V AC	AH165-2SZ□H1	b (-)
	AF87-205		220V AC	AH165-2SZ□M1	24 11.5 25sq.
Extended round		Flat LED	24V DC	AH165-2ZE□E3	Panel thickness 1 to 5
		Incandescent	24V AC/DC	AH165-2ZE□E	a (+) (=)
		Neon	110V AC	AH165-2ZE□H1	b (-)
	AF87-212		220V AC	AH165-2ZE□M1	24 11.5 220 225
Extended square		Flat LED	24V DC	AH165-2SZE□E3	Panel thickness 1 to 5
		Incandescent	24V AC/DC	AH165-2SZE□E	a (+) (-)
		Neon	110V AC	AH165-2SZE□H1	
	AF87-204		220V AC	AH165-2SZE□M1	24 11.5 25sq.

· Lens color

Replace the $\hfill\square$ mark by the following lens color code

Color	Green	Red	White	Yellow	Blue	Orange
Code	G	R	W	Υ	S	0

· Lamp voltage

Voltage other than above is available

Code	LED	Incandescent	Neon
AA A B K P	5V DC 6V DC 12V DC -	- 5V AC/DC 12V AC/DC -	- - - 120V AC 240V AC

- The color lens is made of a tinted transparent material.
 A white lens is fitted with a transparent color lens.
 With wire-wrap pin terminals have a depth of 29mm.



Pushbuttons/Selectors/Pilot Lights

AH165-2 Mounting space


■ Mounting space, mm

• Illuminated pushbuttons, pushbuttons, selector switches, illuminated selector switches and pilot lights


Round head

Panel cutting ø16.2°0.2

Square head



Mushroom head Push-lock, turn-reset



■ Terminal number

Туре	Wiring	Terminal position
Illuminated pushbuttons, Illuminated selector switches	a b (+) (-) (-) (-) (-) (-) (-) (-) (-) (-) (-	Type number display side
Pushbuttons Selector swiches	① <u>·</u> · · ② ③· · · ④	③① a ② ④ [] (+) []
Pilot lights (without transformer)	a b (+) (-)	Type number display side



Pushbuttons/Selectors/Pilot Lights/Buzzers


AH164, AH165 and AH165-2 Notes on use

Notes on use

■ Installation on panel


- · For installation, use dedicated wrench AHX601. The appropriate tightening torque is 0.6 to 1N-cm.
- · The installation sequence is as follows:

Pass the operator base through the hole in the panel and secure it by tightening the bezel. Properly position the catch arms of the contact holder and the catch legs of the operator base and push the contact holder onto the operator base. To remove the contact holder, pull it while pressing the catch arms inward.



■ Mounting steps of switch with transformer

①Pass the switch operator through the panel hole and secure with a nut by way of the retainer metal from the front of the panel. ②Align the position of the catch arm of the contact block holder with that of the catch leg of the switch operator. Engage these two catches by pushing them together. 3 Insert and secure the transformer unit while assembling the contact block holder with the retainer metal. terminal with lead wires extending from the transformer to the lamp terminal of the contact block holder. (Be care on the polarity of the LED. Red: +, Black: -)



insulation cover by aligning its position with each terminal. To replace the transformer, remove the transformer by widening the catch leg of the contact block holder. Pay attention not to excessively widen the catch leg. Mounting steps are the same as the above steps 3, 4, and 5.

■ Installing the protection cover / dust-tight cover, guardring

Be careful that the panel thickness does not exceed the following:

Panel thickness

Protection cover: 2.6mm max.

⑤Push in and secure the standard accessory

Dust-tight cover: 2.0mm max. Guard ring: 2.5mm max.

■ Operating voltage and rated voltage of incandescent lamps

Rated voltage	Operating voltage
6V 14V	4 to 5V 10 to 12V
28V (Standard)	20 to 24V


Incandescent lamps should be operated at the operating voltages if a lamp service life of 5,000 to 10,000 hours are needed. The ambient temperature must not exceed 30°C if the lamp is used at the rated voltage continuously.

■ Method of replacing lamp


 Incandescent lamps/LED lamps/neon lamps Remove the color lens and inner button with a remover

Then draw out the lamp with a lamp changer AHX672. When installing lamps, do it manually and in the reverse order of removing.


 Products with blue and green LEDs The LED devices on products with high-brightness (blue and green) LEDs are very sensitive to static electricity. When replacing LED lamps do not allow static electricity to come into direct contact with the metal frame on the upper side of the LED lamp. The LED device may be damaged if this part is subjected to static electricity. When installing or removing an LED lamp, it is recommended that you use the lamp changer (AHX672).



• To replace the lamp of a AH165-2 illuminated pushbutton switch (ML,VL), remove the button and draw out the oil-tight cap.



• Then, replace the lamp using a lamp changer (AHX672) and push the oil-tight cap into its original position with its engaging projection properly adjusted (see the figure below).



Note: Lamp of AH165-ZM type can not be replaced.




Pushbuttons/Selectors/Pilot Lights/Buzzers AH164, AH165 and AH165-2


AH164, AH165 and AH165-2 Notes on use

■ Method of replacing color lens

 To remove the color lens, insert a small screwdriver into the color lens and twist in direction of the arrow.



 For an AH165-2, use a small standard screwdriver or a similar tool with a flat end. If one side of the color lens is removed from the screen, insert the screwdriver or a similar tool deeper and remove the color lens together with the screen.



■ Replacing pushbuttons

In the case of alternative action type pushbutton switches and illuminated pushbutton switches, be sure not to replace the pushbuttons in their locked state. This could result in internal damage to the mechanism.

■ Description sheet

The Fuji description sheet is $25\mu m$ thick. If preparing custom description sheets, make sure that the thickness is 0.1mm or less.

■ Contact block

To replace a contact block, use removing tool AGX012. If excessive force is applied when attempting to open the support legs for the contact block holder, deformation or damage may occur.

■ Handling precautions

- Do not apply torque in excess of 1.0 N•m to operate the selectors switch (Type "P"). Required operating force of switches is less than 0.1 N•m.
- Do not tap on a pushbutton to turn it ON or OFF, such handling may damage it. Be sure to operate the pushbutton by hand.

■ Key type selector switch

• Five key types (Type B to Type F) are available besides Type A, which is the standard key type. Be sure to use a key with a symbol which is





vmbol on the kev

Symbol on the main unit

matched with the symbol on the main unit.

- · Fully insert the key into the main unit before turning the key.
- The key turning force should not exceed 0.1 N·m.
- · Do not pull out or insert the key forcibly.

■ Wiring connections

 Use a soldering iron with a wattage of not more than 30W and a tip length of more than 20mm.

Use a rosin-core solder

With a 30W iron complete soldering within 5 seconds, or 10 seconds with a 20W iron. Do not apply external force to the terminals. Do not deform the terminals.

Because lead-free solder's melting point is slightly high, soldering work may be difficult. Use a soldering iron whose tip is rather large or whose calorie is rather high.

· Wires that can be connected

Two solid wires with a maximum diameter of 0.8mm (solder) One stranded wire with a maximum area of 0.75mm² (solder) Flat connection terminal

(2.8□-1.25-5) 0.5 to 1.25mm² (2.8□-0.5-5) 0.2 to 0.5mm²

· Using contact blocks

When using NO and NC contacts in the same contact block, avoid connection that involves opposite polarity or wiring from different types of power supply.

- For wiring to adjacent terminals, use insulated tubing to prevent short-circuit and to assure isolation. For solder terminals, be careful when connecting thick wires. Do not use too much solder.
- Wiring to wire-wrap pin terminals
 Select the appropriate wire sizes and tools from the table below.

Wire size	Bit	Sleeve	Number of effective wraps
0.4mm dia.	3-A	1-B	About 8
0.5mm dia.	1-A	1-B	About 6
(0.65mm dia.)	(2-A)	(2-B)	(About 6)

Use ordinary wrapping for connection.

Wires of 0.65mm dia. must not be used on adjacent terminals. However, 0.65mm dia. wire can be mixed with 0.4 and 0.5mm dia. wires.

 Wiring to tab terminals Use receptacles, No. 110.

■ Installing lamps in close order

When continuously lighting pilot lights or pressing illuminated pushbuttons installed in close order, care must be taken that the ambient temperature does not exceed the rated value.



Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164, AH165 and AH165-2 Notes on use


■ LEDs

LED Lamp Malfunctioning

The LED lamp is lit by a very small level of current (approximately 0.01mA). Therefore, the it may be erroneously lit by a current leaking from the surge absorption circuit or semiconductor circuit or due to stray capacitance between cables. In that case, provide a countermeasure (e.g., connect a resistor in parallel with the LED lamp).

· Countermeasure for Malfunctioning

Shunt Resistor R or CR elements connected in parallel Lamp malfunctions can be prevented by connecting a shunt resistor (R) or CR elements (a capacitor and resistor) in parallel with the LED lamp terminal. The resistance and CR values vary depending on the model and the operating conditions.



· Incoming surge

Be careful that since high luminance LED products use an element sensitive to static electricity, they may not be lit by an abnormal voltage like surge.

■ Using a flat LED in 48V DC circuit

When a flat LED lamps having a rated voltage of 24V DC is used with 48V DC circuit, connect an external resistor of $1,800\,\Omega$ (2W).

■ Preventing the neon lamp from incorrectly turning ON

The neon lamp may incorrectly turn ON due to current leakage or voltage induction. In such a case, connect a shunt resistor in parallel with the lamp.

Example) 110V AC: 100kΩ (0.25W) 220V AC: 50kΩ (2W)

If an external surge of 3kV or more may occur, connect a surge absorption element in parallel with the lamp.

■ Numerical indicators

To ensure high reliability and long life for the LED, design the circuit not to exceed the maximum ratings under any operating conditions.

- Keep in mind that the display may malfunction or be damaged due to noise in input signals. (TC type)
- Wire the TC type as shown on the nameplate. The IC may break if the supply voltage is connected in reverse.
- Keep in mind that the correct display will not appear with negative logic input because the TC type accepts positive logic input.

■ Operation

Do not use a hitting or bouncing action to operate the button, or the switch may break. Always operate the switch by hand.

■ Storage and operation site

- Use the unit within the rated operating ambient temperature and humidity ranges.
- Do not use the enclosed type in places where oil or water is sprayed or where dust accumulates. In places such as these, use the oil-tight type or provide a dust cover.
- The oil-tight type is evaluated with standard cutting oil and cooling oil applied. The oil-tight type cannot be used with some special oils.

■ Buzzer

Noise

If the application circuit is likely to generate excessively strong noise, connect a surge absorber (e.,g., FUJI'S ENC390D, provided that the switch is a 24V type) in parallel with the buzzer.

· Place of Use

The buzzer does not have a drip-proof construction. Do not use the buzzer in places where oil or water is sprayed or where dust accumulates. If the buzzer is a splash-proof type, it will resist sprays of water.

- Do not use the buzzer in places that are subject to an excessive amount of corronsive gas.
- Be careful that the buzzer is likely to sound erroneously due to leakage current or the like.



Pushbuttons/Selectors/Pilot Lights/Buzzers AH164 and AH165 Accessories

■ Accessories for AH164 and AH165

Description		Туре	
Color chips (I	Round)	Color	Туре
0	L, L5, E E5, Z	Green Red White (For Neon) Blue Yellow Orange Clear	AHX631-G AHX631-R AHX631-W AHX631-S AHX631-Y AHX631-O AHX631-C
SF-682	For LED, Neon	Green	AHX653-G
Color chips (Square)	Color	Туре
	SL, SL5, SGL, SGL5, SF, SF5, SGF, SGF5, ZS	Green Red White (For Neon) Blue Yellow Orange Clear	AHX632-G AHX632-R AHX632-W AHX632-S AHX632-Y AHX632-O AHX632-C
SF-681	For LED, Neon	Green	AHX653-SG
Color chips (I	Rectangular)	Color	Туре
SF-680	TL, TL5, TGL TGL5, TF, TF5 TGF, TGF5, ZT	Green Red White (For Neon) Blue Yellow Orange Clear Green	AHX633-G AHX633-R AHX633-W AHX633-S AHX633-Y AHX633-O AHX653-TG
	1 01 225, 110011	GIOGII	
Mushroom he	ead button M, M5	Color Green Red White Blue Yellow Orange	Type AHX682-G AHX682-R AHX682-W AHX682-S AHX682-Y AHX682-O
SI-40		Black	AHX682-B
Convex squa	re head button SM, SM5	Color Green Red White Blue Yellow Orange Black	Type AHX683-G AHX683-R AHX683-W AHX683-S AHX683-Y AHX683-O AHX683-B
Convex recta	ngular head	Color	Туре
button SI-44	TM, TM5	Green Red White Blue Yellow Orange Black	AHX684-G AHX684-R AHX684-W AHX684-S AHX684-Y AHX684-O AHX684-B

Description	Type		
Legend sheet	Type Round Type: AHX615- Legend: ON, OFF, UP, DOWN		
OFF DN STOP OFF DN STOP OFF DN STOP OFF DN STOP	Square Type: AHX616-□ Legend: ON, OFF, UP, DOWN START, STOP, OPEN CLOSE, AUTO, MAN, RESET, POWER, REV, FWD, HIGH, LOW		
OFF ON STOP OFF ON STOP OFF ON STOP OFF ON STOP OFF ON STOP	S' M	.617-□ N, OFF, UP TART, STOI IAN, FOWA	P, AUTO, RD, REVERSE
SH-165	When ordering, specify desired legend in the □ at the end of ordering code, Transparent blank sheets are also available. Use black oil ink.		
Legend plate (Acrylic resin)	Туре	Color	Dimensions, mm
Round	AHX665 AHX665-C AHX665-B	•	ø12.2 x 0.9
Square	АНХ666 АНХ666-С АНХ666-В	•	12.2sq. x 0.9
Rectangular SH-164	АНХ667 АНХ667-С АНХ667-В	•	12.2 x 18.2 x 0.9
Legend plate for spot LED (Acrylic resin)	Туре	Dimension	s, mm
Round Square Rectangular		ø12.2 x 0.9 12.2sq. x 0 12.2 x 18.2	.9
Legend plate for selector switch (2-position)	Type: AHX664 Legend: ON-OFF Legend: Blank Dimensions, mm: 24sq. x 0.5		. x 0.5
Legend plate for symbol mark	Mark	Туре	
Square Rectangular	0	АНХ666-Е АНХ667-Е	
Square The Rectangular	1	AHX666-H AHX667-H	
Square Rectangular	T	AHX666-T AHX667-T	

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164 and AH165 Accessories

Description	Туре
Protection cover	For round and square head button Type: AHX671
	For rectangular head button Type: AHX669 AHX826
In the	This cover protect against accidental operation. Note: Not used for illuminated pushbuttons with guard. Applicable panel thickness is 2.6mm max.
	Dimensions, mm
SM-378	33.2 AHX671 AHX669
	AHX826
	24 19 19 19 19 19 19 19 19
	13.7
	33.2
Dust-tight cover	For round and square head button Type: AHX822 Dimensions, mm: 24sq. x 14.2
	For rectangular head button Type: AHX668 Dimensions, mm: 24 x 30 x 14.2
	For mushroom head button Type: AHX649 Dimensions, mm: ø30 x 18
AF91-123, SI-41	These covers protect against dust. Note: Applicable panel thickness is 2.0mm max.
Guard ring	Type Color Dimensions, mm
	AHX676-B Black Ø21 x 12 AHX676-GY Gray
	This guard ring is used in combination with an extended round head pushbutton (L or E).
SI-42	Note: Applicable panel thickness is 2.5mm max. Please place an order for a packing (AHX685) separately when you intend to use for AH165 series.
Transformer	Voltage Type Lamp
20	100 to 110V AC AHX805-H LED 200 to 220V AC AHX805-M
	100 to 110V AC AHX806-H Incandescent
	200 to 220V AC AHX806-M



Pushbuttons/Selectors/Pilot Lights/Buzzers AH165-2 Accessories

■ Accessories for AH165-2

Description	Туре		Description	Туре		
Color lens (Round)	For flush he	ad.	Legend plate	For flush	hood	
Color lens (nound)		au 2F, 2F5, 2FL, 2FL5, 2Z)	Legend plate		Type	Used with
	Color	Type			AHX2609-W	Incandescent lamp,
	Green	AHX2604-G		01	ALIVO000 0	LED lamp, Pushbutton *1
	Red	AHX2604-R		Clear	AHX2609-C	Neon lamp *2 Pushbutton *3
	Yellow	AHX2604-11 AHX2604-Y		Dimensio	ons, mm: ø18 x	0 9
	Blue	AHX2604-S		Birriorioid	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	. 0.0
	Orange	AHX2604-O		1	nded head	
	Clear	AHX2604 C		Color	Type AHX2610-W	Used with Incandescent lamp,
	Oleai	A11X2004-0		vviille	AUV5010-44	LED lamp, Pushbutton *1
				Clear	AHX2610-C	Neon lamp *2
000	For extende				AHX2610-B	Pushbutton *3
	(Used with 2	PE, 2E5, 2EL, 2EL5, 2ZE)		Dimensio	ກຣ, mm: ø18 ົ້ນ	4.4
	Color	Type		For flush	sauare	
	Green	AHX2605-G		Color		Used with
	Red	AHX2605-R		White	ÁHX2611-W	Incandescent lamp,
	Yellow	AHX2605-Y		Olassi	ALIVOCAA O	LED lamp, Pushbutton *1
	Blue	AHX2605-S			AHX2611-C AHX2611-B	Neon lamp *2 Pushbutton *3
	Orange	AHX2605-O			ons, mm: 17sq.	
	Clear	AHX2605-C		Birriorioid	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	. X 0.0
AF87-631						oncave square
				Color	Type AHX2612-W	Used with Incandescent lamp,
Color lens (Square)	For flush he			vvriite	AUV5015-AN	LED lamp, Pushbutton *1
	(Used with 2	2SF, 2SF5, 2SFL, 2SFL5, 2SZ)		Clear	AHX2612-C	Neon lamp *2
	Color	Type			AHX2612-B	Pushbutton *3
	Green	AHX2606-G		Dimension	ons, mm: 17sq.	x 4.4
	Red	AHX2606-R		*1 Illumina	ated pushbutton :	switches and pilot lights
	Yellow	AHX2606-Y			andescent lamp	
	Blue	AHX2606-S		*2 Illumina	utton switches (e:	xcluding). switches and pilot lights
	Orange	AHX2606-O		with ne	on lamps	
	Clear	AHX2606-C	AF87-631		itton switches (bl	
			AF87-630	* Engrav	ed range: 17mm	dia.
	For extende	d head	Mushroom head button	For illumi	inated pushbut	tons
		2SE, 2SE5, 2SEL, 2SEL5, 2SZE)		1	th 2ML, 2YML)	
	Color	Type		Color	Type	
Percent	Green	AHX2607-G		Green	AHX26	14-G
	Red	AHX2607-R		Red	AHX26	
	Yellow	AHX2607-Y		White	AHX26	
	Blue	AHX2607-S		Yellow	AHX26	
	Orange	AHX2607-O		Blue	AHX26	
	Clear	AHX2607-C		Orange		
	_			l		
	For concave				lluminated pus th 2M, 2YM)	hbuttons
		2SCE, 2SCE5, 2SCL, 2SCL5)		1 '		
	Color	Type		Color	Type	40.0
	Green	AHX2608-G		Green	AHX26	
	Red	AHX2608-R		Red	AHX26	
	Yellow	AHX2608-Y		White	AHX26	
	Blue	AHX2608-S		Yellow	AHX26	
	Orange	AHX2608-O		Blue	AHX26	
	Clear	AHX2608-C		Orange		
AF87-632			AF87-633	Black	AHX26	13-B

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH165-2

Accessories

	1
Description	Туре
Push-lock, turn-reset button	For illuminated pushbuttons (Used with 2VL, 2YVL)
	Color Type
	Green AHX2616-G Red AHX2616-R
	White AHX2616-W
	Yellow AHX2616-Y
(e) (e)	For pushbuttons
	(Used with 2V, 2YV)
	Color Type
	Green AHX2615-G Red AHX2615-R
	Yellow AHX2615-Y
	Black AHX2615-B
AF87-634	
Dust-tight cover	For flush round
J	(Used with 2F, 2FL, 2F5, 2FL5)
	Type: AHX2603-2
	For flush square
	(Used with 2SF, 2SFL, 2SF5, 2SFL5)
	Type: AHX2603-2S
AF87-636	These covers protect against dust.
Key washer	Type: AHX2601
	Mounting hole, mm
	1.7 ⁻⁶² 1 rmax.0.8
	90, 60, 60, 60, 60, 60, 60, 60, 60, 60, 6
AF87-635	ø16.2'%²
	510.2 0



Pushbuttons/Selectors/Pilot Lights/buzzers AH164, AH165 and AH165-2 Accessories

■ Accessories for AH164, AH165 and AH165-2


Description		Туре		
Incandescent lam	ip	Voltage	Туре	
() o	•	6V, 0.6W 14V, 0.7V 28V, 0.7V	/ AHX642	
SD-924		\	T	
LED lamp		Voltage	Type	
		5V DC 6V DC 12V DC 24V DC	АНХ69 АНХ69 АНХ69 АНХ69	5-6 □ 5-12 □
NF02-116		color cod Red (R),	he □ mark by the Green (G), Orai), Yellow (Y), Bl	nge (O),
Neon lamp		Voltage	Туре	Luminous
	_	110V AC	АНХ655-Н АНХ654-Н	color Green Orange
		120V AC	AHX655-K AHX654-K	Green Orange
		220V AC	AHX655-M AHX654-M	
SP-119		240V AC	AHX655-P AHX654-P	Green Orange
Panel plug		Color	Гуре	
•	Round			P40 P40
	Square			P40 P40
SI-186	Rectangular	Gray	AHX645-GY	P40 P40 P65
Lamp changer		Type: Al-	IX672	
AF02-117		this tool to	ch is fitted with o remove the la necessary wher	mp. The
Remover	-	Type: Al-	IX618	
SE-34		This tool is used for replacing the color chips or screens.		
Contact holder re	mover	Type: Al-	IX699	
SP-522		This tool is used to remove a contact holder when switches are densely installed.		

Description	Туре
Wrench	Type: AHX601
SE-741	When installing a command switch on a panel, this tool is useful for tightening the switch firmly and efficiently.
Terminal cover	Type: AHX2602
AF87-637	This cover is used with AH164 and AH165 and AH165-2 (except pilot lights). Pass the wires through the cover, then mount the cover in position.
Contact block	Terminal Type
SK-1140.	Solder/Tab AGX001 Wire-wrap AGX001–W
Dummy unit	Type: AGX002
SK-1141	A dummy unit is used to fill the space where no contact blocks are installed. For example, two dummy units are used if 1NO+1NC contact block is installed, and one dummy unit is used if 2NO+2NC contact blocks are installed.
Remover	Type: AGX012
SM-334	This tool is used for replacing the contact blocks or dummy units.

Pushbuttons/Selectors/Pilot Lights/Buzzers

AH164, AH165 and AH165-2 Accessories

Description	Туре		
Sockets	Terminal	Туре	Used with
	Solder/Tab Wire-wrap PC board	AHX697-S AHX697-W AHX697-P	Pushbuttons
The state of the s	Solder/Tab Wire-wrap PC board	AHX697-SL AHX697-WL AHX697-PL	Illuminated pushbuttons
SM-1097		ngement is 2l H165-2PL typ	NO+2NC only. es
Sockets for LED	Terminal	Туре	
LLD	Solder/Tab Wire-wrap	AHX697-SH AHX697-WI	
SM-1098	These socker lamps rated for 110V AC/DC. Except for Alpilot lights or When side-by continuous lights.	H164, 165 and AH165-2PL typy-side mounting ghting, note tha trature over the	y when LED used under 165-2 series e. g and t a socket has
Dimensions, mm Solder/Tab	P	°C board mou	nting
		ushbuttons	1.3



For wiring to wire-wrap pin terminals, select appropriate wire sizes and tool from the table below.

Wire size	Bit	Sleeve	Number of effective wraps
0.4mm dia.	3-A	1-B	About 8
0.5mm dia.	1-A		About 6
(0.65mm dia.)	(2-A)		(About 6)

Use ordinary wrapping for connection. Wires of 0.65mm dia. must not be used on adjacent terminals. However, 0.65mm dia. wire can be mixed with 0.4mm and 0.5mm dia. wires.



Pushbuttons/Selectors/Pilot Lights/Buzzers AH164, AH165 and AH165-2 Mass

■ Mass, gram AH164 series

Туре	1NO	2NO	3NO
	+ 1NC	+ 2NC	3NC
AH164-L,L5 (Without transformer) L,L5 (With transformer) SL,SL5 (Without transformer)	12.5 53.5 13.1	13.5 54.5 14.1	14.5 - 15.1
SL,SL5 (With transformer) TL,TL5 (Without transformer) TL,TL5 (With transformer)	54.1 13.9 54.9	55.1 14.9 55.9	- 15.9 -
TGL,TGL5 (Without transformer) TGL,TGL5 (With transformer) SGL,SGL5 (Without transformer) SGL,SGL5 (With transformer)	13.9 54.9 13.1 54.1	14.9 55.9 14.1 55.1	15.9 - 15.1 -
AH164-E,E5 M,M5 SF,SF5 TF,TF5 TGF,TGF5 SGF,SGF5 SM,SM5 TM,TM5	10.5 12.5 11.1 11.9 11.9 11.1 13.4 13.1	11.5 13.5 12.1 12.9 12.9 12.1 14.4	12.5 14.5 13.1 13.9 13.9 13.1 15.4
AH164-P2,P0 P3,P6,P7,P1 PK3,PK6,PK7,PK1 SP2,SP0 SP3,SP6,SP7,SP1 SPK3,SPK6,SPK7,SPK1 J2,J0 J3,J6,J7,J1 JK3,JK6,JK7,JK1 SJ2,SJ0 SJ3,SJ6,SJ7,SJ1 SJK3,SJK6,SJK7,SJK1	16.4 - 15.8 - - 30.4 - 29.8	17.4 17.4 17.4 16.8 16.8 16.8 31.4 31.6 31.6 30.8 30.8 30.8	18.4 18.4 17.8 17.8 17.8 32.4 32.6 32.6 31.8 31.8
AH164-Z (Without transformer) Z (With transformer) ZS (Without transformer) ZS (With transformer) ZT (Without transformer) ZT (Without transformer) ZT (With transformer)	6.9 50.9 7.5 51.5 8.2 52.2		
AH164-TX TX1 TX2B	16 17.5 13.2		
AH164-TS TC TC4□E- □K1 TC4□E- □K	9.7 15.6 46.4 52.8		

AH165 series

AH165 series	100	ONO	2010
Туре	1NO +	2NO +	3NO +
	1NC	2NC	3NC
AH165-L,L5 (Without transformer)	12.5	13.5	14.5
L,L5 (With transformer) SL,SL5 (Without transformer)	53.5 13.1	54.5 14.1	- 15.1
SL,SL5 (With transformer)	54.1	55.1	-
TL,TL5 (Without transformer)	13.9	14.9	15.9
TL,TL5 (With transformer)	54.9	55.9	-
TGL,TGL5 (Without transformer)	13.9	14.9	15.9
TGL,TGL5 (With transformer)	54.9	55.9	-
SGL,SGL5 (Without transformer)		14.1	15.1
SGL,SGL5 (With transformer)	54.1	55.1	-
AH165-E,E5	10.5	11.5	12.5
M,M5	12.5	13.5	14.5
SF,SF5	11.1	12.1	13.1
TF,TF5	11.9	12.9	13.9
TGF,TGF5	11.9	12.9	13.9
SGF,SGF5	11.1	12.1	13.1
SM,SM5	13.4	14.4	15.4
TM,TM5	13.1	14.1	15.1
VR	13.4 *1	14 *2	-
V1R	14.3 *1	14.9 *2	=-
AH165-V5R	18 *1	18.6 *2	-
V6R	18.9 *1	19.5 *2	-
AH165-P2,P0	16.7	17.7	18.7
P3,P6,P7,P1	-	17.7	18.7
PK3,PK6,PK7,PK1	-	18	19
SP2,SP0	16.1	17.1	18.1
SP3,SP6,SP7,SP1	-	17.1	18.1
SPK3,SPK6,SPK7,SPK1	-	17.1	18.1
J2,J0	31.1	32.1	33.1
J3,J6,J7,J1	=	32.1	33.1
JK3,JK6,JK7,JK1	20 E	32.1	33.1
SJ2,SJ0	30.5	31.5	32.5
SJ3,SJ6,SJ7,SJ1 SJK3,SJK6,SJK7,SJK1	- -	31.5 31.5	32.5 32.5
 AH165-JM2	30	34.4	
RJM2	29.6	34	-
AH165-Z (Without transformer)	6.9		
Z (With transformer)	50.9		
ZS (Without transformer)	7.5		
ZS (With transformer)	51.5		
ZT (Without transformer)	8.2		
ZT (With transformer)	52.2		
ZM (Without transformer)	5.4		
AH165-X	13.6		
	9.7		
AH165-TS TC	15.6		

Note: *1 For 1NC *2 For 2NC



Pushbuttons/Selectors/Pilot Lights/Buzzers AH164, AH165 and AH165-2 Mass

■ Mass, gram AH165-2 series

AH165-2 series			
Туре	1NO	2NO	3NO
	+ 1NC	+ 2NC	+ 3NC
AH165-2FL,FL5	15.2	16.2	17.2
2EL,EL5 2ML	15.6 18.7	16.6 19.7	17.6 20.7
2YML	20.2	21.2	20.7 22.2
2SFL,SFL5	16.5	17.5	18.5
2SFL,SFL5 2SEL,SEL5	17.4	17.5	19.4
2SCL,SCL5 2SCL,SCL5	17.4	18.6	19.4
2VL	19.9	20.9	21.9
2YVL	21.4	22.4	23.4
	21.7		
AH165-2F,F5	14.4	15.4	16.4
2E,E5	14.8	15.8	16.8
2M	16.7	17.7	18.7
2YM	18.2	19.2	20.2
2SF,SF5	14.5	15.5	16.5
2SE,SE5	15.4	16.4	17.4
2SCE,SCE5	15.6	16.6	17.6
2S2	-	19	-
2YS2	-	20.6	-
2V	17.9	18.9	19.9
2YV	19.4	20.4	21.4
AH165-2P2,P0	17.1	18.1	19.1
2P3,P6,P7,P1	-	18.1	19.1
2YP2,YP0	18.7	19.7	20.7
2YP3,YP6,YP7,YP1	-	19.7	20.7
2J2,J0	40	41	42
2J3,J6,J7,J1	-	41	42
2YJ2	41.6	42.6	43.6
2YJ3,YJ6,YJ7,YJ1	-	42.6	43.6
2H	14.3	15.3	16.3
2SH	16.1	17.1	18.1
AH165-2PL2	17.3	18.3	_
2PL3	-	18.3	-
AH165-2Z	9.7		
2ZE	10.1		



Discontinued	Replacement	Discontinued	Replacem	ent
PART#	PART #	PART #	PART#	TYPE
AH22-AA@@	AR22A5N-@@@@B	AH30-SAA@@	AR30A5N-@@@@B	Joy stick
•	AR22A5H-@@@@B	AH30-SAA@@-S	AR30A5H-@@@@B	selector switch
AH22-ALA@@	AR22A6N-@@@@B	AH30-SALA@@	AR30A6N-@@@@B	
=	AR22A6H-@@@@B	AH30-SALA@@-S	AR30A6H-@@@@B	
AH22-ALM@@	AR22A1N-@@@@B	AH30-SALM@@	AR30A1N-@@@@B	
AH22-AM@@	AR22A0N-@@@@B	AH30-SAM@@	AR30A0N-@@@@B	
=	AR22A0H-@@@@B	AH30-SAM@@-S	AR30A0H-@@@@B	
=	AR22A1H-@@@@B	AH30-SALM@@-S	AR30A1H-@@@@B	
-	AR22A2N-@@@@B	-	AR30A2N-@@@@B	
-	AR22A2H-@@@@B	-	AR30A2H-@@@@B	
-	AR22A7N-@@@@B	-	AR30A7N-@@@@B	
-	AR22A7H-@@@@B	-	AR30A7H-@@@@B	
-	-	AH30-B1#@@	AR30B0R-@@#	Giant
-	-	AH30-B2#@@	AR30B1R-@@#	head
-	-	AH30-B3#@@	AR30B2R-@@#	
-	-	AH30-B4#@@	AR30B3R-@@#	
-	-	AH30-C@@%	-	Coin
-	-	AH30-D@@%	-	Key
AH22/25-E#@@	AR22E0R-@@#	AH30-E#@@	AR30E0R-@@#	Round
AH22/25-E5#@@	AR22E5R-@@#	AH30-E5#@@	AR30E5R-@@#	extended
AH22-EL#@@*&	AR22E0L-@@*&#</td><td></td><td>-</td><td>head</td></tr><tr><td>AH22-EL5#@@*&</td><td>AR22E5L-@@*&#</td><td></td><td>-</td><td></td></tr><tr><td>=</td><td>-</td><td>AH30F#@@/ES</td><td>AR30FVR-@@#</td><td>E-stop</td></tr><tr><td>AH22/25-F#@@</td><td>AR22F0R-@@#</td><td>AH30-F#@@</td><td>AR30F0R-@@#</td><td>Flush</td></tr><tr><td>AH22/25-F5#@@</td><td>AR22F5R-@@#</td><td>AH30-F5#@@</td><td>AR30F5R-@@#</td><td>head</td></tr><tr><td>AH25-G#@@</td><td>AR22G0R-@@#</td><td>AH30-G#@@</td><td>AR30G0R-@@#</td><td>w/guard</td></tr><tr><td>AH22/25-G1#@@</td><td>AR22G3R-@@#</td><td>AH30-G1#@@</td><td>AR30G1R-@@#</td><td></td></tr><tr><td>-</td><td>-</td><td>AH30-G3#@@</td><td>AR30GPR-@@#</td><td>Pin-lock</td></tr><tr><td>AH25-G5#@@</td><td>-</td><td>AH30-G5#@@</td><td>-</td><td>w/guard</td></tr><tr><td>AH22/25-G6#@@</td><td>AR22G8R-@@#</td><td>AH30-G6#@@</td><td>AR30G6R-@@#</td><td></td></tr><tr><td> AH22-GL1#@@*&</td><td>AR22G4L-@@*&#</td><td>-</td><td>-</td><td>w/guard</td></tr><tr><td> AH22-GL6#@@*&</td><td>AR22G9L-@@*&#</td><td>-</td><td>-</td><td></td></tr><tr><td></td><td>2</td><td>AH30-H2@@</td><td>AR30WR-2@@#</td><td>Selector</td></tr><tr><td></td><td>-</td><td>AH30-H3@@</td><td>AR30WR-3@@#</td><td>switch</td></tr><tr><td> AH22/25-J0A@@%</td><td>AR22JR-0A@@%</td><td>AH30-J0A@@%</td><td>AR30JR-0A@@%</td><td>Key</td></tr><tr><td> AH22/25-J1E@@%</td><td>AR22JR-1E@@%</td><td>AH30-J1E@@%</td><td>AR30JR-1E@@%</td><td>selector</td></tr><tr><td>AH22/25-J2\$@@%</td><td>AR22JR-2\$@@%</td><td>AH30-J2\$@@%</td><td>AR30JR-2\$@@%</td><td>switch</td></tr><tr><td>AH22/25-J3\$@@%</td><td>AR22JR-3\$@@%</td><td>AH30-J3\$@@%</td><td>AR30JR-3\$@@%</td><td></td></tr><tr><td>AH22/25-J6\$@@%</td><td>AR22JR-6\$@@%</td><td>AH30-J6\$@@%</td><td>AR30JR-6\$@@%</td><td></td></tr><tr><td>AH22/25-J7\$@@%</td><td>AR22JR-7\$@@%</td><td>AH30-J7\$@@%</td><td>AR30JR-7\$@@%</td><td></td></tr><tr><td>AH22-JC1E@@@%</td><td>AR22JCR-1\$@@@%</td><td>AH30-JC\$@@@%</td><td>AR30JCR-3\$@@@%</td><td></td></tr><tr><td>AH22-JC3\$@@@%</td><td>AR22JCR-3\$@@@%</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-JC6\$@@@%</td><td>AR22JCR-6\$@@@%</td><td> -</td><td>-</td><td></td></tr><tr><td>AH22-JC7\$@@@%</td><td>AR22JCR-7\$@@@%</td><td>1 -</td><td>-</td><td></td></tr><tr><td>-</td><td>-</td><td>AH30-K2\$@@</td><td>-</td><td></td></tr><tr><td></td><td></td><td> / 11 100 1 12 4 6 6</td><td></td><td></td></tr></tbody></table>			

^{@:} contacts arrangement

%: type of key

[&]amp;: lamp type

^{#:} color of button or grove

^{\$:} draw-out position of key

^{*:} lamp voltage

Discontinued	Replacement	Discontinued	Replace	ment
PART #	PART#	PART#	PART #	TYPE
AH25-L#@@*&	AR22E0L-@@*&#</td><td>AH30-L#@@*&</td><td>AR30E0L-@@*&#</td><td>Extended</td></tr><tr><td>AH25-L2#@@*&</td><td>AR22G4L-@@*&#</td><td>AH30-L2#@@*&</td><td>AR30G4L-@@*&#</td><td>w/guard</td></tr><tr><td>AH25-L3#@@*&</td><td>AR22G4L-@@*&#</td><td>AH30-L3#@@*&</td><td>AR30G3L-@@*&#</td><td></td></tr><tr><td>AH25-L4#@@*&</td><td>AR22G4L-@@*&#</td><td>AH30-L4#@@*&</td><td>AR30G4L-@@*&#</td><td></td></tr><tr><td>AH25-L5#@@*&</td><td>AR22E5L-@@*&#</td><td>AH30-L5#@@*&</td><td>AR30E5L-@@*&#</td><td>Extended</td></tr><tr><td>AH25-L6#@@*&</td><td>AR22G9L-@@*&#</td><td>AH30-L6#@@*&</td><td>AR30G9L-@@*&#</td><td>w/guard</td></tr><tr><td>AH25-L7#@@*&</td><td>AR22G9L-@@*&#</td><td>AH30-L7#@@*&</td><td>AR30G8L-@@*&#</td><td></td></tr><tr><td>AH22-M#@@</td><td>AR22M0R-@@#</td><td>AH30-M#@@</td><td>AR30M0R-@@#</td><td>Mushroom</td></tr><tr><td>AH25-M#@@</td><td>AR22M4R-@@#</td><td>-</td><td>-</td><td>head</td></tr><tr><td></td><td>-</td><td>AH30-M2#@@</td><td></td><td></td></tr><tr><td> AH22-M2#@@</td><td>AR22M3R-@@#</td><td>AH30-M1#@@</td><td>AR30M3R-@@#</td><td></td></tr><tr><td>AH22-M5#@@</td><td>AR22M5R-@@#</td><td>AH30-M5#@@</td><td>AR30M5R-@@#</td><td></td></tr><tr><td>AH25-M5#@@</td><td>AR22M5R-@@#</td><td>711100 111011 2 2</td><td>-</td><td></td></tr><tr><td>- A I I Z J WI O # G G</td><td>ATTELINOTT G G #</td><td>AH30-M6#@@</td><td></td><td></td></tr><tr><td> AH22-M7#@@</td><td>_</td><td>AH30-M7#@@</td><td>(5)</td><td></td></tr><tr><td>AH22-M1#@@*&</td><td>- AR22M0L-@@*&#</td><td>AI IOU-IVIT#@@</td><td></td><td></td></tr><tr><td>AH22-ML5#@@*&</td><td></td><td>1</td><td>-</td><td></td></tr><tr><td></td><td>AR22M5L-@@*&#</td><td>- ALIOO MO#@@</td><td>4 DOOMAD @ #</td><td></td></tr><tr><td>AH22-MS#@@</td><td>AR22M4R-@@#</td><td>AH30-MS#@@</td><td>AR30M4R-@@#</td><td></td></tr><tr><td>AH22-MS5#@@</td><td>-</td><td>AH30-MS5#@@</td><td>-</td><td></td></tr><tr><td>AH22-MSL#@@*&</td><td>AR22M4L-@@*&#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-MSL5#@@*&</td><td>-</td><td></td><td></td><td></td></tr><tr><td>-</td><td>-</td><td>AH30-NR@@</td><td>AR30N0R-@@R</td><td>Turn-lock</td></tr><tr><td>AH22/25-P0#@@</td><td>AR22PR-0@@#</td><td>AH30-P0#@@</td><td>AR30PR-0@@#</td><td>Selector</td></tr><tr><td>AH22/25-P1#@@</td><td>AR22PR-1@@#</td><td>AH30-P1#@@</td><td>AR30PR-1@@#</td><td>switch</td></tr><tr><td>AH22/25-P2#@@</td><td>AR22PR-2@@#</td><td>AH30-P2#@@</td><td>AR30PR-2@@#</td><td></td></tr><tr><td>AH22/25-P3#@@</td><td>AR22PR-3@@#</td><td>AH30-P3#@@</td><td>AR30PR-3@@#</td><td></td></tr><tr><td>AH25-P5#@@</td><td>AR22PR-6@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-P6#@@</td><td>AR22PR-6@@#</td><td>AH30-P5#@@</td><td>AR30PR-6@@#</td><td></td></tr><tr><td>AH22-P7#@@</td><td>AR22PR-7@@#</td><td>AH30-P6#@@</td><td>AR30PR-7@@#</td><td></td></tr><tr><td>AH25-PC#@@@</td><td>AR22PCR-3@@@#</td><td>AH30-PC#@@</td><td>AR30PCR-3@@@#</td><td></td></tr><tr><td>AH22-PC1#@@@</td><td>AR22PCR-1@@@#</td><td>-</td><td>=</td><td></td></tr><tr><td>AH22-PC3#@@@</td><td>AR22PCR-3@@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-PC4#@@@</td><td>AR22PCR-4@@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-PC5#@@@</td><td>AR22PCR-5@@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-PC6#@@@</td><td>AR22PCR-6@@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-PC7#@@@</td><td>AR22PCR-7@@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-PCL3#@@@*&</td><td>-</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-PCL4#@@@*&</td><td>-</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-PCL5#@@@*&</td><td>-</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22/25-PL0#@@*&</td><td>AR22PL-0@@*&#</td><td>AH30-PL0#@@*&</td><td>AR30PL-0@@*&#</td><td></td></tr><tr><td>AH22-PL1#@@*&</td><td>-</td><td>AH30-PL1#@@*&</td><td>-</td><td></td></tr><tr><td>AH22/25-PL2#@@*&</td><td>AR22PL-2@@*&#</td><td>AH30-PL2#@@*&</td><td>AR30PL-2@@*&#</td><td></td></tr><tr><td>AH22-PL3#@@*&</td><td>AR22PL-3@@*&#</td><td>AH30-PL3#@@*&</td><td>AR30PL-3@@*&#</td><td></td></tr><tr><td></td><td>711221 L-0@@ 0#</td><td> Alibu-i Lo#@@ a</td><td>711001 L-088 0#</td><td></td></tr><tr><td>AH22-PL6#@@*&</td><td>AR22PL-6@@*&#</td><td>AH30-PL6#@@*&</td><td>AR30PL-6@@*&#</td><td></td></tr></tbody></table>			

@: contacts arrangement

&: lamp type

#: color of button or grove

\$: draw-out position of key

*: lamp voltage

%: type of key



Discontinued	Replacement	Discontin	1,	
PART #	PART #	PART	T# PART#	TYPE
AH22-PR0#@@	AR22RR-0@@#	-		Selector
AH22-PR1#@@	AR22RR-1@@#	-	-	switch
AH22-PR2#@@	AR22RR-2@@#	-	-	
AH22-PR3#@@	AR22RR-3@@#	-	-	
AH22-PR6#@@	AR22RR-6@@#	-	-	
AH22-PR7#@@	AR22RR-7@@#	-	-	
AH22-PRC1#@@@	AR22RCR-1@@@#	-	-	
AH22-PRC3#@@@	AR22RCR-3@@@#	-	-	
AH22-PRC4#@@@	AR22RCR-4@@@#	<u> </u>	-	
AH22-PRC5#@@@	AR22RCR-5@@@#	-	-	
AH22-PRC6#@@@	AR22RCR-6@@@#	-	-	
AH22-PRC7#@@@	AR22RCR-7@@@#	-	()	
AH22/25-PW0#@@	AR22WR-0@@#	AH30-PW0#@@	AR30WR-0@@#	
AH22/25-PW1#@@	AR22WR-1@@#	AH30-PW1#@@	AR30WR-1@@#	
AH22/25-PW2#@@	AR22WR-2@@#	AH30-PW2#@@	AR30WR-2@@#	
AH22/25-PW3#@@	AR22WR-3@@#	AH30-PW3#@@	AR30WR-3@@#	
AH25-PW5#@@	AR22WR-6@@#	-	-	
AH22-PW6#@@	AR22WR-6@@#	AH30-PW5#@@	P AR30WR-6@@#	
AH22-PW7#@@	AR22WR-7@@#	-	AR30WR-7@@#	
AH22-PWC1#@@@	AR22WCR-1@@@#	-	-	
AH22-PWC3#@@@	AR22WCR-3@@@#	-	-	
AH22-PWC4#@@@	AR22WCR-4@@@#		-	
AH22-PWC5#@@@	AR22WCR-5@@@#		-	
AH22-PWC6#@@@	AR22WCR-6@@@#	-	-	
AH22-PWC7#@@@	AR22WCR-7@@@#	-	-	
-	-	AH30-Q#11	-	Push-pull
AH22-Q2#@@	AR22Q2R-@@#	AH30-Q2#@@	AR30Q2R-@@#	
AH22-S1C4#*(-N)	DR22N1-(N)*#	AH30-S1C4#*(-I	N) DR30N1-(N)*#	Numerical
AH22-S2C4#*(-N)	DR22N2-(N)*#	AH30-S2C4#*(-I	N) DR30N2-(N)*#	indicator
AH22/25-S1#@@	AR22S1R-22#	AH30-S1#@@	AR30S1R-22#	w/selector
AH22/25-S2#@@	AR22S2R-@@#	AH30-S2#@@	AR30S2R-@@#	ring
AH22/25-S3#@@	AR22S3R-@@#	AH30-S3#@@	AR30S3R-@@#	
AH22/25-S4#@@	-	AH30-S4#@@	-	
AH22/25-S5#@@	-	AH30-S5#@@	-	
AH22/25-S6#@@	AR22S6R-@@#	AH30-S6#@@	AR30S6R-@@#	
AH22/25-SE#@@	AR22E0S-@@#	AH30-SE#@@	(AR22 series+AR9Y003)	Extended
AH22/25-SE5#@@	AR22E5S-@@#	AH30-SE5#@@	(AR22 series+AR9Y003)	head
	AR22E0M-@@*&#</td><td>-</td><td>-</td><td></td></tr><tr><td> AH22-SEL5#@@*&</td><td>AR22E5M-@@*&#</td><td>-</td><td>-</td><td></td></tr><tr><td> AH22/25-SF#@@</td><td>AR22F0S-@@#</td><td>AH30-SF#@@</td><td>(AR22 series+AR9Y003)</td><td>Flush</td></tr><tr><td>AH22/25-SF5#@@</td><td>AR22F5S-@@#</td><td>AH30-SF5#@@</td><td>,</td><td>head</td></tr><tr><td>AH22-SFL#@@*&</td><td>AR22F0M-@@*&#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-SFL5#@@*&</td><td>AR22F5M-@@*&#</td><td> -</td><td>-</td><td></td></tr><tr><td>AH25-SJ2#@@</td><td>AR22JY-2\$@@%</td><td>AH30-SJ2#@@</td><td>(AR22 series+AR9Y003)</td><td>Selector</td></tr><tr><td>AH25-SJ3#@@</td><td>AR22JY-3\$@@%</td><td>AH30-SJ3#@@</td><td>1</td><td>switch</td></tr><tr><td>AH25-SL#@@*&</td><td>AR22E0M-@@*&#</td><td>AH30-SL#@@*</td><td>` '</td><td>Extended</td></tr><tr><td>o o_, o o u</td><td>AR22F0M-@@*&#</td><td>AH30-SL1#@@</td><td>,</td><td>Flush</td></tr><tr><td>AH25-SI 1#@@*&</td><td>, II ILLI OIVI G G UII</td><td></td><td>, ,</td><td>Extended</td></tr><tr><td></td><td>AR22F5M-@@*&#</td><td> AH30-SL5#(0)(0)</td><td>TARYY CANAGE ARGVIII ST</td><td></td></tr><tr><td>AH25-SL1#@@*& AH25-SL5#@@*& AH25-SL6#@@*&</td><td>AR22E5M-@@*&#</td><td>AH30-SL5#@@</td><td>` '</td><td></td></tr><tr><td></td><td>AR22E5M-@@*&# AR22F5M-@@*&# AR22PY-2@@#</td><td>AH30-SL5#@@ AH30-SL6#@@ AH30-SP2#@@</td><td>*& (AR22 series+AR9Y003)</td><td>Flush Selector</td></tr></tbody></table>			

@: contacts arrangement

&: lamp type

#: color of button or grove

\$: draw-out position of key

*: lamp voltage %: type of key

Discontinued	Replacement	Discontinued	Replace	ement
PART#	PART #	PART #	PART#	TYPE
AH22-SZ#*&	DR22F3M-*&#</td><td>AH30-SZ#*&</td><td></td><td>Pilot light</td></tr><tr><td>AH22-TZ#*&</td><td>DR22E3N-*&#</td><td>-</td><td>-</td><td></td></tr><tr><td>=</td><td>-</td><td>AH30-T#11*&</td><td>AR30Q7L-11*&#</td><td>Push-pull</td></tr><tr><td>AH22-UH@@</td><td>-</td><td>-</td><td>-</td><td>Wabble</td></tr><tr><td>AH25-UB@@</td><td>-</td><td>AH30-UB@@</td><td>-</td><td>stick</td></tr><tr><td>=</td><td>-</td><td>AH30-V1R@@</td><td>AR30V1R-@@R</td><td>E-stop</td></tr><tr><td>=</td><td>-</td><td>AH30-V5R@@</td><td>-</td><td></td></tr><tr><td>-</td><td>-</td><td>AH30-V6R@@</td><td>-</td><td></td></tr><tr><td>-</td><td>-</td><td>AH30-VEL1R@@</td><td>-</td><td></td></tr><tr><td>-</td><td>-</td><td>AH30-VELR@@*&</td><td>AR30V2L-@@*&R</td><td></td></tr><tr><td>-</td><td>-</td><td>AH30-VER@@</td><td>AR30V2R-@@R</td><td></td></tr><tr><td>AH22-VJR@@</td><td>AR22V7R-@@R</td><td>-</td><td></td><td></td></tr><tr><td>AH22-VL1R@@*&</td><td>AR22VAL-@@*&R</td><td>-</td><td>- (3)</td><td></td></tr><tr><td>AH22/25-VLR@@*&</td><td>AR22V2L-@@*&R</td><td>AH30VLR@@*&</td><td>AR30V2L-@@*&R</td><td></td></tr><tr><td>AH22-VNLR@@*&</td><td>AR22VKL-@@*&R</td><td>-</td><td></td><td></td></tr><tr><td>AH22-VNR@@</td><td>AR22VKR-@@R</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22/25-VR@@</td><td>AR22V2R-@@R</td><td>AH30-VR@@*</td><td>AR30V2R-@@R</td><td></td></tr><tr><td>AH22-VSJR@@</td><td>AR22V7R-@@R</td><td>- 7</td><td>-</td><td></td></tr><tr><td>AH22-VSLR@@*&</td><td>AR22V2L-@@*&R</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-VSR@@</td><td>AR22V4R-@@R</td><td>-</td><td>-</td><td></td></tr><tr><td>-</td><td>-</td><td>AH30-W1#@@</td><td>-</td><td>Lever</td></tr><tr><td>-</td><td>-</td><td>AH30-W3#@@</td><td>-</td><td>select</td></tr><tr><td>-</td><td>-</td><td>AH30-X1B*</td><td>DR30B6-*B</td><td>Buzzer</td></tr><tr><td>AH22-X2B*</td><td>DR22B3-*B</td><td>AH30-X2B*</td><td>DR30B0-*B</td><td></td></tr><tr><td>AH22-XB*</td><td>DR22B5-*B</td><td>AH30-XB*</td><td>DR30B5-*B</td><td></td></tr><tr><td>AH22-YE#@@</td><td>AR22E0Y-@@#</td><td>-</td><td>-</td><td>Extended</td></tr><tr><td>AH22-YE5#@@</td><td>AR22E5Y-@@#</td><td>-</td><td>-</td><td>head</td></tr><tr><td>AH22-YEL#@@*&</td><td>AR22E0P-@@*&#</td><td>-</td><td>-</td><td></td></tr><tr><td></td><td>AR22E5P-@@*&#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YF#@@</td><td>AR22F0Y-@@#</td><td>-</td><td>-</td><td>Flush</td></tr><tr><td> AH22-YF5#@@</td><td>AR22F5Y-@@#</td><td>-</td><td>-</td><td>head</td></tr><tr><td>AH22-YJ0A@@%</td><td>AR22JY-0A@@%</td><td>-</td><td>-</td><td>Selector</td></tr><tr><td>AH22-YJ1E@@%</td><td>AR22JY-1E@@%</td><td>-</td><td>-</td><td>switch</td></tr><tr><td>AH22-YJ2\$@@%</td><td>AR22JY-2\$@@%</td><td>-</td><td>-</td><td></td></tr><tr><td> AH22-YJ3\$@@%</td><td>AR22JY-3\$@@%</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YJ6\$@@%</td><td>AR22JY-6\$@@%</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YJ7\$@@%</td><td>AR22JY-7\$@@%</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YJC1E@@@%</td><td>AR22JCY-1\$@@@%</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YJC3\$@@@%</td><td>AR22JCY-3\$@@@%</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YJC6\$@@@%</td><td>AR22JCY-6\$@@@%</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YJC7\$@@@%</td><td>AR22JCY-7\$@@@%</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YMS#@@</td><td>AR22M4Y-@@#</td><td>-</td><td>-</td><td>Mushroom</td></tr><tr><td>AH22-YMS5#@@</td><td>-</td><td>-</td><td></td><td>head</td></tr></tbody></table>			

@: contacts arrangement

&: lamp type

#: color of button or grove

\$: draw-out position of key

%: type of key

^{*:} lamp voltage



Discontinued	Replacement	Discontin	nued Repla	acement
PART#	PART#	PART	# PART#	TYPE
AH22-YP0#@@	AR22PY-0@@#	-	-	Selector
AH22-YP1#@@	AR22PY-1@@#	-	-	switch
AH22-YP2#@@	AR22PY-2@@#	-	-	
AH22-YP3#@@	AR22PY-3@@#	-	-	
AH22-YP6#@@	AR22PY-6@@#	-	-	
AH22-YP7#@@	AR22PY-7@@#	-	-	
AH22-YPC1#@@@	AR22PCY-1@@@#	-	-	
AH22-YPC3#@@@	AR22PCY-3@@@#	-	-	
AH22-YPC6#@@@	AR22PCY-6@@@#	-	-	
AH22-YPC7#@@@	AR22PCY-7@@@#	-	-	
AH22-YPL0#@@*&	AR22PP-0@@*&#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YPL1#@@*&</td><td>AR22PP-1@@*&#</td><td>-</td><td></td><td></td></tr><tr><td>AH22-YPL2#@@*&</td><td>AR22PP-2@@*&#</td><td>-</td><td>- ()</td><td></td></tr><tr><td>AH22-YPL3#@@*&</td><td>AR22PP-3@@*&#</td><td>-</td><td></td><td></td></tr><tr><td>AH22-YPL6#@@*&</td><td>AR22PP-6@@*&#</td><td>-</td><td>1.60</td><td></td></tr><tr><td>AH22-YPL7#@@*&</td><td>AR22PP-7@@*&#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YPR0#@@</td><td>AR22RY-0@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YPR1#@@</td><td>AR22RY-1@@#</td><td>- 0</td><td>-</td><td></td></tr><tr><td>AH22-YPR2#@@</td><td>AR22RY-2@@#</td><td>-</td><td>_</td><td></td></tr><tr><td>AH22-YPR3#@@</td><td>AR22RY-3@@#</td><td>_</td><td></td><td></td></tr><tr><td>AH22-YPR6#@@</td><td>AR22RY-6@@#</td><td>- 0</td><td></td><td></td></tr><tr><td>AH22-YPR7#@@</td><td>AR22RY-7@@#</td><td></td><td></td><td></td></tr><tr><td>AH22-YPRC1#@@@</td><td>AR22RCY-1@@@#</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YPRC3#@@@</td><td>AR22RCY-3@@@#</td><td>-</td><td></td><td></td></tr><tr><td>AH22-YPRC6#@@@</td><td>AR22RCY-6@@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YPRC7#@@@</td><td>AR22RCY-7@@@#</td><td>-</td><td></td><td></td></tr><tr><td>AH22-YPW0#@@</td><td>AR22WY-0@@#</td><td>-</td><td></td><td></td></tr><tr><td>AH22-YPW1#@@</td><td>AR22WY-1@@#</td><td>-</td><td></td><td></td></tr><tr><td>AH22-YPW2#@@</td><td>AR22WY-2@@#</td><td>-</td><td></td><td></td></tr><tr><td>AH22-YPW3#@@</td><td>AR22WY-3@@#</td><td>-</td><td></td><td></td></tr><tr><td>AH22-YPW6#@@</td><td>AR22WY-6@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YPW7#@@</td><td>AR22WY-7@@#</td><td>-</td><td></td><td></td></tr><tr><td>AH22-YPWC1#@@@</td><td>AR22WCY-1@@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YPWC3#@@@</td><td>AR22WCY-3@@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YPWC6#@@@</td><td>AR22WCY-6@@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YPWC7#@@@</td><td>AR22WCY-7@@@#</td><td>-</td><td>-</td><td></td></tr><tr><td>AH22-YS1 to 6#*&</td><td>-</td><td>-</td><td>-</td><td>w/selector ring</td></tr><tr><td>AH22-YZ#*&</td><td>DR22E3P-*&#</td><td>-</td><td>-</td><td>Pilot</td></tr><tr><td>AH22-Z#*&</td><td>DR22E3L-*&#</td><td>-</td><td>-</td><td>light</td></tr><tr><td>AH22/25-ZM#*&</td><td>DR22D0L-*&#</td><td>AH30-ZM#*&</td><td>DR30D0L-*&#</td><td></td></tr><tr><td>AH25-ZN#*&</td><td></td><td>AH30-ZN#*&</td><td>DR30F4M-*&#</td><td></td></tr><tr><td>-</td><td>DR22F4M-*&#</td><td>-</td><td>-</td><td></td></tr><tr><td>•</td><td>-</td><td>AH30-ZN1#*&</td><td>DR30F4N-*&#</td><td></td></tr><tr><td></td><td>-</td><td>AH30-ZN2#*&</td><td>DR30F4N-*&#</td><td></td></tr><tr><td>-</td><td>-</td><td>AH30-ZN4#*&</td><td>DR30M4M-*&#</td><td></td></tr><tr><td>AH25-ZK#*&</td><td>DR22K0L-*&#</td><td>AH30-ZK#*&</td><td>DR30K0L-*&#</td><td></td></tr><tr><td>AH25-ZS#*&</td><td>DR22E3M-*&#</td><td>-</td><td>-</td><td></td></tr><tr><td>-</td><td>-</td><td>AH30-ZS#*&</td><td>DR30F4M-*&#</td><td></td></tr><tr><td></td><td>_</td><td>AH30-ZV#*&</td><td>DR30D1L-*&#</td><td></td></tr></tbody></table>			

@: contacts arrangement

&: lamp type

#: color of button or grove

\$: draw-out position of key

*: lamp voltage %: type of key

Discontinued	Repl	acement	Discontinued	Replacement
AH22	AH25 (*1)	AR22	AH30 (*1)	AR30
AH22-%#012	AH25-PC#012	AR22&-3014#	AH30-\$#012	AR30&-3014#
AH22-%#022	AH25-PC#022	AR22&-3024#	AH30-\$#022	AR30&-3024#
AH22-%#032	AH25-PC#032	AR22&-303C#	AH30-\$#032	AR30&-303C#
AH22-%#033 (*1)	-	AR22&-303C#	-	-
AH22-%#042	AH25-PC#042	AR22&-3044#	AH30-\$#042	AR30&-3044#
AH22-%#052	AH25-PC#052	AR22&-3054#	AH30-\$#052	AR30&-3054#
AH22-%#062	AH25-PC#062	AR22&-3064#	AH30-\$#062	AR30&-3064#
AH22-%#071	-	AR22&-307F#	-	-
AH22-%#072	AH25-PC#072	AR22&-307C#	AH30-\$#072	AR30&-307C#
AH22-%#073 (*1)	-	AR22&-307C#	-	-
AH22-%#082	AH25-PC#082	AR22&-3084#	AH30-\$#082	AR30&-3084#
AH22-%#092	AH25-PC#092	AR22&-3094#	AH30-\$#092	AR30&-3094#
AH22-%#102	AH25-PC#102	AR22&-3104#	AH30-\$#102	AR30&-3104#
AH22-%#112	AH25-PC#112	AR22&-311C#	AH30-\$#112	AR30&-311C#
AH22-%#114 (*1)	-	AR22&-311C#	-	-
AH22-%#122	AH25-PC#122	AR22&-3124#	AH30-\$#122	AR30&-3124#
AH22-%#132	AH25-PC#132	AR22&-3134#	AH30-\$#132	AR30&-3134#
-	AH25-PC#142	AR22&-314D#	AH30-\$#142	AR30&-314D#
AH22-%#143	-	AR22&-314D#	-	-
-	AH25-PC#152	AR22&-315A#	AH30-\$#152	AR30&-315A#
AH22-%#153	-	AR22&-315A#	-	-
AH22-%#162	AH25-PC#162	AR22&-3164#	AH30-\$#162	AR30&-3164#
AH22-%#172	AH25-PC#172	AR22&-3174#	AH30-\$#172	AR30&-3174#
AH22-%#182	AH25-PC#182	AR22&-3184#	AH30-\$#182	AR30&-3184#
AH22-%#192	AH25-PC#192	AR22&-3194#	AH30-\$#192	AR30&-3194#
	AH25-PC#202	AR22&-320B#	AH30-\$#202	AR30&-320B#
AH22-%#204	1 -	AR22&-320B#	-	=
	AH25-PC#212	AR22&-3094#	AH30-\$#212	AR30&-3094#
AH22-%#412	-	AR22&-441C#	-	-
AH22-%#512	-	AR22&-551C#	-	-

^{%:} JC, PC, PRC, PWC, YPC, YPRC, YPW, YJC, PCL

Note *1: Terminal wirings for AR series are different from AH series

Knob	Bezel	AH22	AH25 (*1)	AR22	AH30 (*1)	AR30
Standard	Round	PC	PC	PCR	PC	PCR
	Square	YPC	-	PCY	-	-
Long	Round	PWC	-	WCR	-	-
	Square	YPWC	-	WCY	-	-
Round	Round	PRC	-	RCR	-	-
	Square	YPRC	-	RCY	-	-
Key	Round	JC	-	JCR	JC	JCR
	Square	YJC	-	JCY	-	=
Illuminated	Round	PCL	-	-	-	-
Standard						

^{\$:} PC, JC

[&]amp;: JCR, PCR, RCR, WCR, JCY, PCY, RCY, WCY



Discontinued	Replacement		
PART#	PART #	TYPE	
RCa470-AE#@	AR30E5R-@@#	Round extended head	
RCa470-AF@	AR30F5R-@@#	Flush head	
RCa470-AG#@	-	w/guard	
RCa470-AG1#@	AR30G6R-@@#	w/guard	
RCa470-B1#@	AR30B0R-@@#	Giant head	
RCa470-B2#@	AR30B1R-@@#		
RCa470-B3#@	AR30B2R-@@#		
RCa470-B4#@	AR30B3R-@@#		
RCa470-D@%	-	Push button w/key	
RCa470-EF#@	AR30E0R-@@#	Round extended head	
RCa470-F#@	AR30F0R-@@#	Flush head	
RCa470-G#@	AR30G0R-@@#	w/guard	
RCa470-G1#@	AR30G1R-@@#		
RCa470-H2#@	AR30WR-2@@#	Selector switch	
RCa470-H3#@	AR30WR-3@@#		
RCa470-HA01#@	AR30WR-1@@#		
RCa470-J2\$@%	AR30JR-2\$@@%	Key selector switch	
RCa470-J3\$@%	AR30JR-3\$@@%		
RCa470-JA01\$@%	AR30JR-1E@@%		
RCa470-JA2\$@%	AR30JR-0A@@%		
RCa470-JA3\$@%	AR30JR-6\$@@%		
RCa470-JC3\$@@@%	AR30JCR-3\$@@@%		
RCa470-K2\$@%	-		
RCa470-K3\$@%	-		
RCa470-L#@(T)*	AR30E0L-@@*&#</td><td>Round extended head</td></tr><tr><td>RCa470-L#@(T)*G</td><td>AR30G4L-@@*&#</td><td>w/guard</td></tr><tr><td>RCa470-L#@*GS</td><td>AR30G3L-@@*&#</td><td></td></tr><tr><td>RCa470-L3#@(T)*</td><td>-</td><td>Round extended head</td></tr><tr><td>RCa470-L4#1(T)*</td><td>-</td><td></td></tr><tr><td>RCa470-M#@</td><td>AR30M0R-@@#</td><td>Mushroom head</td></tr><tr><td>RCa470-M1#@</td><td>-</td><td></td></tr><tr><td>RCa470-M2#@</td><td>AR30M3R-@@#</td><td></td></tr><tr><td>RCa470-N#@</td><td>AR30N0R-@@R</td><td>Turn-lock</td></tr><tr><td></td><td></td><td></td></tr></tbody></table>		

Discontinued	Replac	cement
PART#	PART#	TYPE
RCa470-P2#@	AR30PR-2@@#	Selector switch
RCa470-P3#@	AR30PR-3@@#	
RCa470-PA01#@	AR30PR-1@@#	
RCa470-PA2#@	AR30PR-0@@#	
RCa470-PA3#@	AR30PR-6@@#	
RCa470-PC#@@@	AR30PCR-3@@@#	
RCa470-PL3#2@*	AR30PL-2@@*&#</td><td></td></tr><tr><td>RCa470-PL3#3@*</td><td>AR30PL-3@@*&#</td><td></td></tr><tr><td>RCa470-Q#@</td><td>-</td><td>Pull type</td></tr><tr><td>RCa470-S1#2</td><td>AR30S1R-22#</td><td>w/selector ring</td></tr><tr><td>RCa470-S2#2</td><td>AR30S2R-22#</td><td></td></tr><tr><td>RCa470-S3#2</td><td>AR30S3R-22#</td><td></td></tr><tr><td>RCa470-S4#2</td><td>-</td><td></td></tr><tr><td>RCa470-S5#2</td><td>-</td><td></td></tr><tr><td>RCa470-S6#2</td><td>AR30S6R-22#</td><td></td></tr><tr><td>RCa470-T#1(T)*</td><td>AR30Q7L-11*&#</td><td>Push-pull</td></tr><tr><td>RCa470-UB@</td><td>AR30A!!-@@@@B</td><td>Wabble stick type</td></tr><tr><td>RCa470-V#@</td><td>AR30V0R-@@#</td><td>E-stop</td></tr><tr><td>RCa470-V1#@</td><td>AR30V1R-@@R</td><td></td></tr><tr><td>RCa470-V1J#@</td><td>-</td><td></td></tr><tr><td>RCa470-VJ#@</td><td>-</td><td></td></tr><tr><td>RCa470-W1#@</td><td>-</td><td>Lever select</td></tr><tr><td>RCa470-W3#@</td><td>-</td><td></td></tr><tr><td>RCa470-ZK#(T)*</td><td>DR30K0L-*&#</td><td>Pilot light</td></tr><tr><td>RCa470-ZK3#(T)*</td><td>-</td><td></td></tr><tr><td>RCa470-ZM#(T)*</td><td>DR30D0L-*&#</td><td></td></tr><tr><td>RCa470-ZM3#(T)*</td><td>-</td><td></td></tr><tr><td>RCa470-ZN#(T)*</td><td>DR30F4M-*&#</td><td></td></tr><tr><td>RCa470-ZN1#(T)*</td><td>DR30F4N-*&#</td><td></td></tr><tr><td>RCa470-ZN2#(T)*</td><td>-</td><td></td></tr><tr><td>RCa470-ZN3#(T)*</td><td>-</td><td></td></tr><tr><td>RCa470-ZS#(T)*</td><td>-</td><td></td></tr><tr><td>RCa470-ZS3#(T)*</td><td>-</td><td></td></tr></tbody></table>	

@: contacts arrangement

&: lamp type

#: color of button or grove

\$: draw-out position of key

*: lamp voltage

%: type of key



■ TERMS AND CONDITIONS OF SALE

Prices

All prices are subject to change without notice. In the event of a price change, the effective date of the change will be the date on the new price or discount schedule sheet.

All quotations made or orders accepted after the effective date will be based on the new prices.

Quotations

Written quotations are valid for 30 days from its date unless otherwise stated in the quotation. Verbal quotations expire the same day they are made.

Taxes

The price does not include any taxes. Buyer shall be responsible for the payment of all applicable taxes.

Terms of payment

Terms of payment will be listed on the quotations.

Minimum orders

Terms of minimum order will be shown on quotations, or if orders amounting to less than the latest minimum order amount, a handling fee will be applied.

Delivery

Delivery of products shall be FOB point of origin in the U.S. Seller shall determine the point of origin of shipment. All shipping and other charges shall be paid by Buyer.

Packing

Prices include standard domestic packing. Additional special packing costs required for export or by Buyer's request will be charged to Buyer.

Weight and Dimensions

The weight and dimensions of products described in this catalog are the best information available at the time of going to press. As Seller follows a policy of continuous product improvement, design changes may make this information obsolete. Information in this catalog is subject to change without notice.

Inspection and acceptance of products

Buyer is responsible for evaluating received products or damage for final acceptance. All claims of shortage must be made within thirty (30) days of receipt of products.

Return / Cancellation

No product shall be returned or canceled unless return/order cancel authorization has been secured from Seller. All returns/cancellations must comply with Seller's then current Return / Cancellation policy.

Risk of Loss

Risk of loss or damage to the product shall pass to Buyer at the FOB point.

Catalog Disclaimer

The information contained in this catalog does not constitute an express or implied warranty of quality, any warranty of merchantability or fitness for a particular purpose is hereby disclaimed.

Since the Buyer's product information, specific use application, and conditions of use are all outside of Seller's control, it shall be the responsibility of the Buyer to determine the suitability of any of the products mentioned for the Buyer's application.

ONE YEAR LIMITED WARRANTY

The products identified in this catalog shall be sold pursuant to the terms and conditions identified in the Conditions of Sale issued by Fuji Electric with each order confirmation. Except to the extent otherwise provided for in the Conditions of Sale issued by Fuji Electric, Fuji Electric warrants that the Fuji Electric products identified in this catalog shall be free from significant defects in materials and workmanship provided the products have not been: (1) repaired or altered by others than Fuji Electric; (2) subjected to negligence, accident, misuse, or damage by circumstances beyond Fuji Electric's control; (3) improperly operated, maintained or stored; or (4) used in other than normal use or service. This warranty shall apply only to defects appearing within one (1) year from the date of shipment by Fuji Electric, and in such case, only if such defects are reported to Fuji Electric within thirty (30) days of discovery by purchaser.

Such notice should be submitted in writing to Fuji Electric Corp. of America. The sole and exclusive remedy with respect to the above warranty whether such claim is based on warranty, contract, negligence, strict liability or any other theory, is limited to the repair or replacement of such

product or, at Fuji Electric's option, reimbursement by Fuji Electric of the purchase price paid to Fuji Electric for the particular product.

FUJI ELECTRIC DOES NOT MAKE ANY OTHER REPRESENTATIONS OR WARRANTIES, WHETHER ORAL OR IN WRITING, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY REGARDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE

Except as provided in the Conditions of Sale, no agent or representative of Fuji Electric is authorized to modify the terms of this Warranty in writing or orally.

In no event shall Fuji Electric be liable for special, indirect or consequential damages, including but not limited to, loss of use of the product, other equipment, plant, power system, loss of profits or revenues, cost of capital, or claims against the purchaser or user by its customers resulting from the use of information, recommendations and descriptions contained herein. Purchaser agrees to pass on to its customers and users, in writing at the time inquiries and orders are received by buyer, Fuji Electric's warranty as set forth above.



Your local authorized stocking distributor is:	

FUJI ELECTRIC CORP. OF AMERICA

Website: www.fujielectric.com

FUJI ELECTRIC (JAPAN)

Website: www.fujielectric.co.jp

INFORMATION IN THIS CATALOG IS SUBJECT TO CHANGE WITHOUT NOTICE.

Printed in USA 2008/5M