



DIMENSIONS:

A	3.125" ±0.063
B	2.224" ±0.125
C	2.745" ±0.063
D	2.813" ±0.063
E	1.076" ±0.063
G	0.187" ±0.063
H	2.188" ±0.063
J	2.188" ±0.063

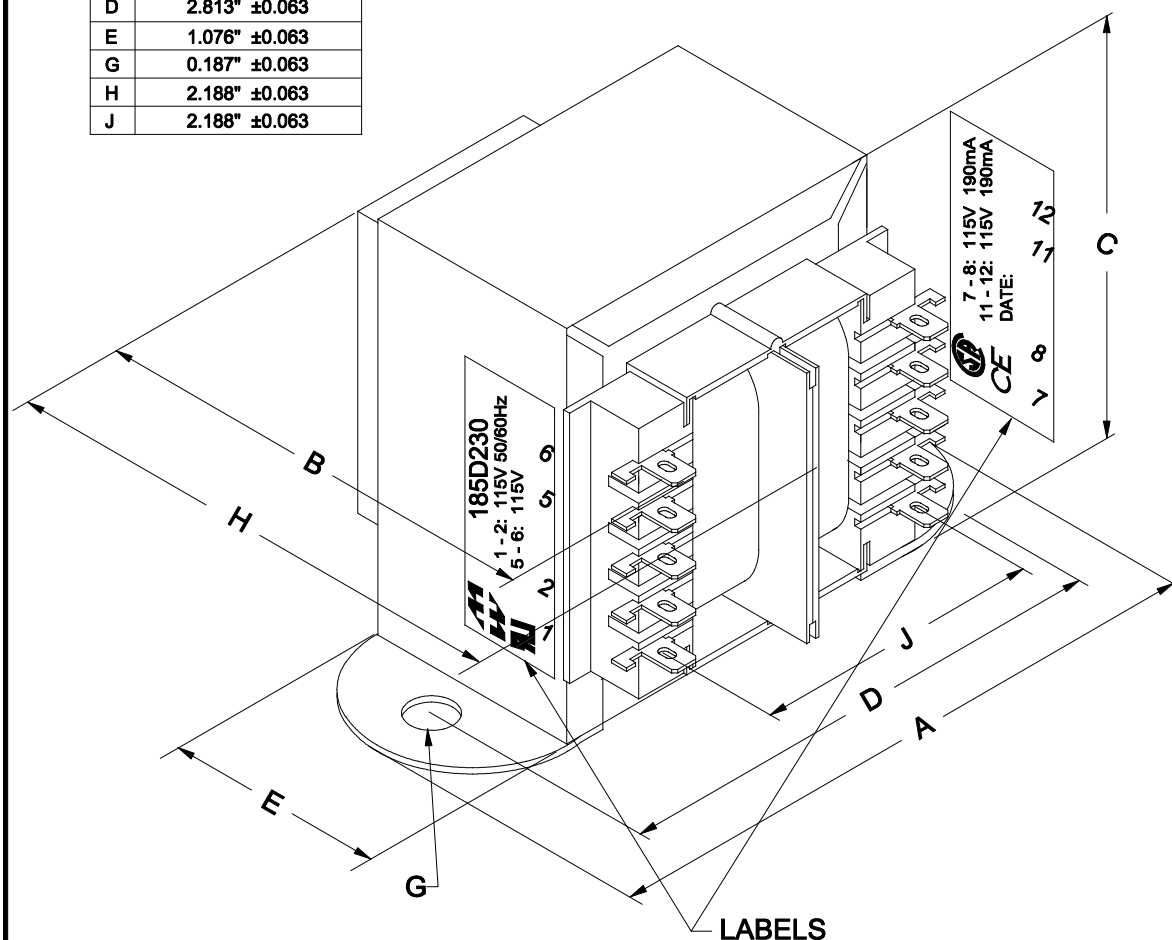

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
lex	@ 115V, 60Hz, PIN 1 - PIN 2	120mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 5 - PIN 6 =	115.0V	±2%
	PIN 7 - PIN 8 =	133.2V	±2%
	PIN 11 - PIN 12 =	133.2V	±2%
DCR	@ 20°C, PIN 1 - PIN 2 =	28.23 Ω	±20%
	@ 20°C, PIN 5 - PIN 6 =	28.23 Ω	±20%
	@ 20°C, PIN 7 - PIN 8 =	40.20 Ω	±20%
	@ 20°C, PIN 11 - PIN 12 =	40.20 Ω	±20%
HIPOT	PRMARY - SECONDARY	4000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	05/13/15	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: CHASSIS MOUNT POWER TRANSFORMER	DWG. NO. 185D230
			DATE: 05/13/15	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

HAMMOND
MANUFACTURING

PH # (519) 886-6181
FAX # (519) 886-9540