


S-D

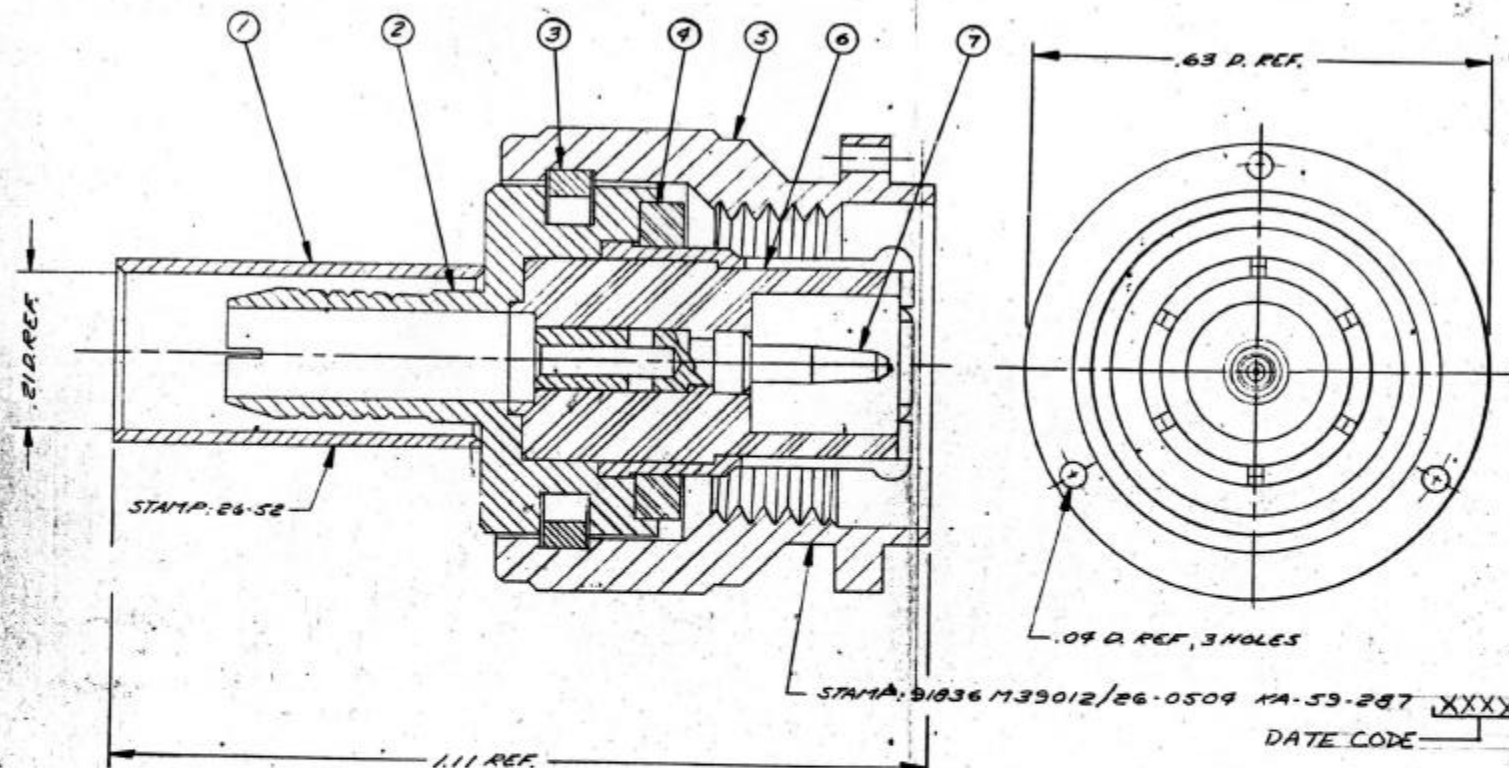

NOTES:

1. FOR USE WITH RG-58, 58A, 58C, 141 & 141A/U CABLES.
2. FOR CABLE TRIMMING USE KTY-113 & KTD-166.
3. FOR FORMING USE CRIMP DIE SIZE 01.
4. FOR CABLING INSTRUCTIONS SEE CP-965.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$ ANGLES $\pm 0^\circ 30'$
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

8	1	CABLING INSTRUCTIONS	3-102-ZMBB
7	1	BNC CRIMP CAPTIVE CONTACT	1-569-19M9D
6	1	INSULATOR	
5	1	COUPLING NUT	
4	1	GASKET	
3	1	C-RING	
2	1	BODY ASSY.	
1	1	K-GRIP SLEEVE	1-7690-1MC7
1	1	DESCRIPTION	PART NO.

S-D

REVISIONS

ISSUE	CHANGES
3	CN 21656 C HELEN 23 FEB 81
5	CN 27833 A SD 3 MAR 86
6	CN 32301 A LNM 19 JUN 90

M39012/26-0504

KA-59-287

USED ON:

REF:

FINISH

SPEC. KER 10004

MATL:

SPEC:

TNC PLUG

DRAWN JL

DATE 29 SEP 73

APPR. LI

DATE 26 JUN 74

KINGS ELECTRONICS
40 MARLBOROUGH ROAD
TUCKAHOE, N. Y. 10707

M39012/26-0504

S-D