


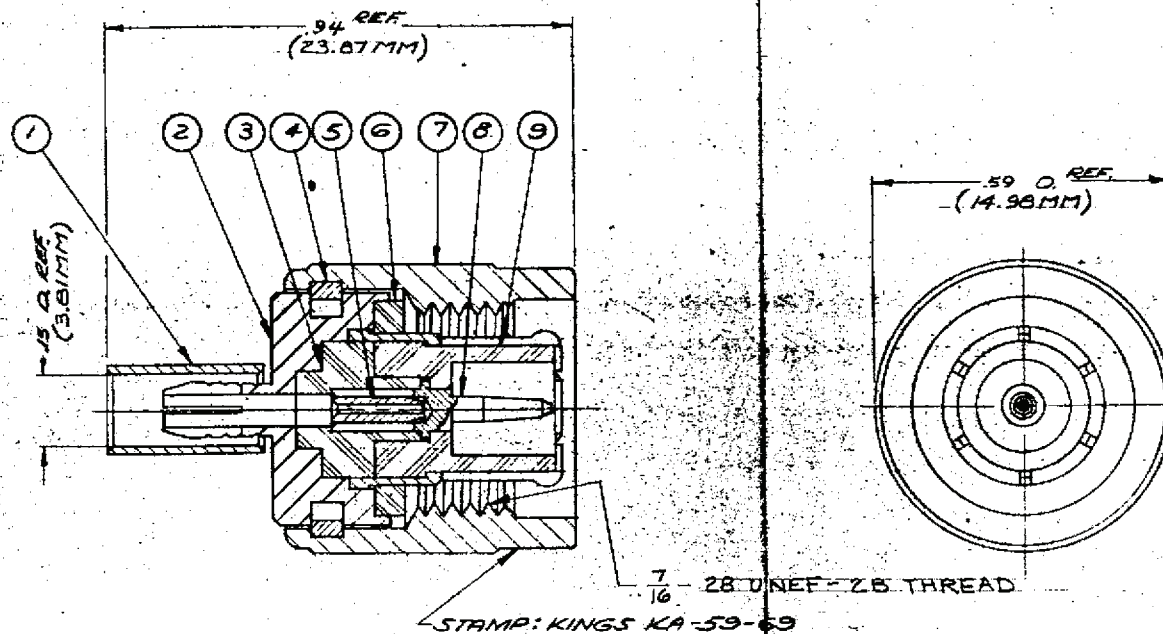

NOTES:

1. FOR USE WITH RG-174, 179, 187 & 188/U CABLES.
2. FOR CABLE TRIMMING USE KTJ-30.
3. FOR CRIMPING USE DIE SIZE 32.
4. FOR CABLING INSTRUCTIONS SEE CP-406.

UNLESS OTHERWISE SPECIFIED:

- | | |
|--|---|
| <p>1. TOLERANCES:
FRACTIONS & .010 DECIMALS ± .004 ANGLES ± 0° 30'
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT
EXCEED THE SUM OF THEIR TOLERANCES.</p> | <p>2. REMOVE ALL BURRS, BREAK SHARP EDGES .003 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.</p> |
|--|---|

ITEM	QTY	DESCRIPTION	DWG. NO.
9	1	INSULATOR	
8	1	TNC CAPTIVE CONTACT M-F	
7	1	COUPLING NUT	
6	1	GASKET	
5	1	CRIMP CONTACT	C-59-95-2-M07
4	1	C-RING	
3	1	INSULATOR	
2	1	BODY ASSEMBLY	
1	1	K-GRIP SLEEVE	S-89-67-2-MC7

REVISIONS

NO.	CHANGES
1	CN 6350 A 19 AUG 68 ANE
2	CN 11107 A J.G.L. 25 APR 72
3	CN 25062 C JEP 1 SEPT 83

REF:

FINISH

SPEC. KER 10004

MATL.

SPEC.

TNC PLUG

DRAWN A.T. DATE 8 FEB 66

APPR. L.I. DATE 9 FEB 66

KINGS ELECTRONICS
40 MARBLEDALE ROAD
TUCKAHOE, N. Y.

KA-59-69

S-D