


DASH NO.	DESCRIPTION	MADE FROM
----------	-------------	-----------

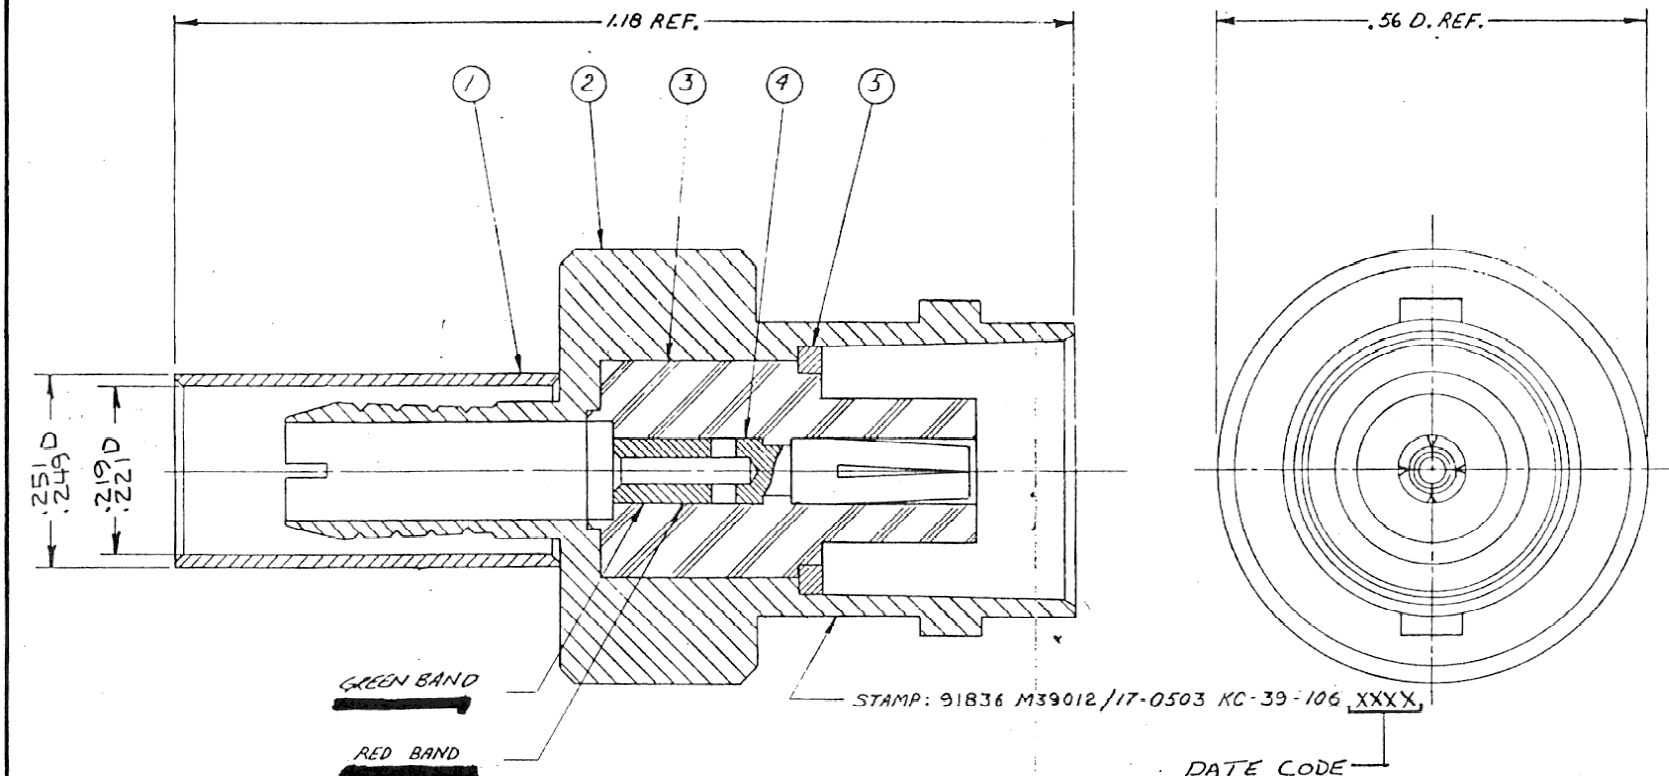

NOTES:

1. FOR USE WITH RG-142, 223, 400/U CABLE GROUPS.
2. FOR CABLE TRIMMING USE KTT-113 & KTD-166.
3. FOR FORMING USE CRIMP DIE SIZE 01.
4. FOR CABLING INSTRUCTIONS SEE CP-465

6. ITEM ② TO BE SUPPLIED UNASSEMBLED.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

6	1	CABLING INSTRUCTIONS	3-339-2M88
5	1	RETAINER RING	
4	1	BNC CRIMP CAPTIVE CONTACT F	1-570-ZAMB D
3	1	INSULATOR	
2	1	K-GRIP BODY	
1	1	K-GRIP SLEEVE	1-4690-2MC7
ITEM	REQ'D	DESCRIPTION	PART NO.

REVISIONS	
ISSUE	CHANGES
0.	ER 13618 LI 22 JUL 74
1	CN 13841 A M.J.F. 11 OCT 74
2	CN 15974 A GA 15 JUL 76
3	CN 23168 E MD 29 MAR 82
4.	CN 25533 D CT 14 DEC 83
5	CN 28193 A CHC 5 AUG 86
6	CN 28237 C CHC 18 AUG 86
7	CN 32278 A LNM 13 JUN 90
M39012/17-0503	
KC-39-106	
USED ON:	
REF:	
FINISH	
SPEC.	
MATL.	
SPEC.	
BNC JACK	
DRAWN W.D.	DATE 29 APR 74
APPR. LI	DATE 22 JUL 74
KINGS ELECTRONICS 40 MARBLEDALE ROAD TUCKAHOE, N. Y. 10707	
M39012/17-0503	

GSD