



| DASH NO. | M CODE | MADE FROM |
|----------|--------|-----------|
|----------|--------|-----------|

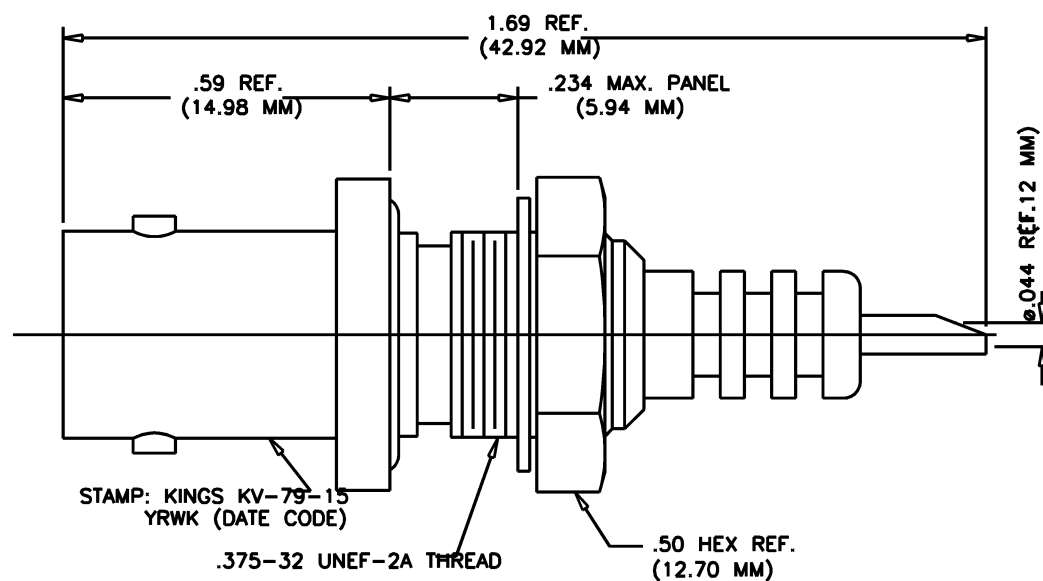

#### NOTES:

- MATERIALS:**  
CENTER CONTACT F: BERYLLIUM COPPER, ASTM-B-196.  
LOCKWASHER: PHOSPHOR BRONZE, QQ-B-750.  
INSULATORS: TEFLON, ASTM-D-1457.  
O-RING: SYNTHETIC RUBBER PER MIL-P-5516.  
ALL OTHER METAL PARTS: BRASS, ASTM-B16.
- FINISHES:**  
CENTER CONTACT: SILVER PLATE PER QQ-P-365.  
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5).
- ELECTRICAL CHARACTERISTICS:**  
OPERATING VOLTAGE: 3500 V AC.  
5000 V DC.



MOUNTING HOLE

# GSD

KV-79-15

| REVISIONS |                                      |
|-----------|--------------------------------------|
| ISSUE     | CHANGES                              |
| 6         | CN 37589 C<br>REDRAWN<br>JW 03/03/98 |
| 7         | CN 37691 E<br>HVN 10/05/98           |
| 8         | CN 39747 C<br>PMC 1/5/07             |
| 9         | CN 39954 C<br>HVN 06/05/07           |

KV-79-15 SD

|                         |          |
|-------------------------|----------|
| SCALE                   | 4:1      |
| APPROX SURFACE AREA     |          |
| USED ON                 |          |
| REF:                    |          |
| MHV BULKHEAD RECEPTACLE |          |
| DRAWN                   | SD       |
| DATE                    | 09/08/86 |
| DESIGN                  | MJB      |
| DATE                    | 09/08/86 |
| APPR.                   |          |
| DATE                    |          |

A Winchester Electronics Company

KV-79-15

# GSD