

21PCT120T3-0002 **(21PCT120T3-5V-G/G)**

Hi-Eff Green/Hi-Eff Green

3mm (T1) Right-Angled Bi-Level PCB LEDs
w/ 5V Integrated Resistor
45° Viewing Angle



DWG BY:
GP
07-07-21

R&D:
UF
07-07-21


MFG:
LD
07-07-21

QA:
SB
07-07-21

REVISION LTR: -

07-07-21

● Dimensions

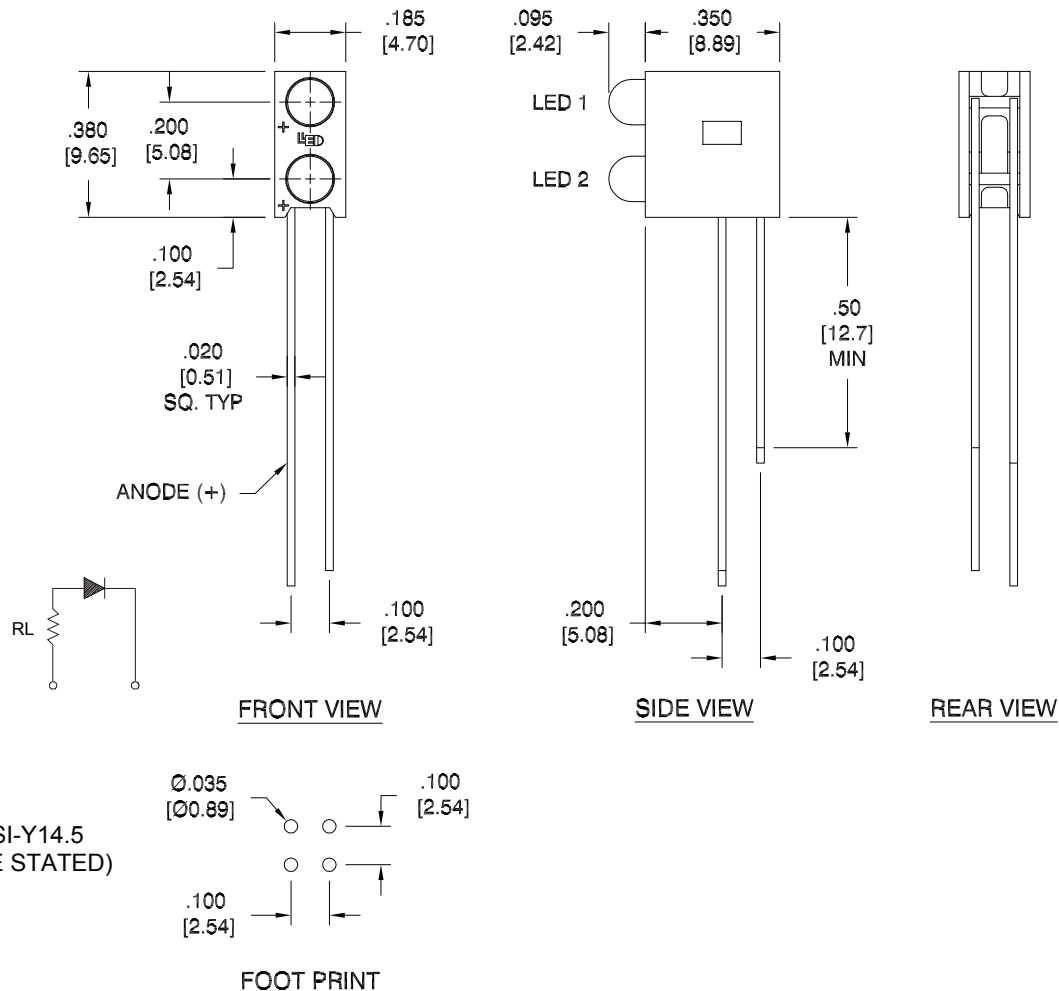

TOLERANCE PER ANSI-Y14.5
(UNLESS OTHERWISE STATED)
.XXX ± .010
.XX ± .025
ANGLES ± 0°, 30'
FRACT. ± 1/32

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. LED CHIP MATERIAL: GaP/GaP
3. LED EMITTED COLOR: HI-EFF. GREEN
4. LED LENS APPEARANCE: GREEN DIFFUSED
5. BASE MATERIAL: NYLON 66 (UL94V-2)
6. BASE COLOR: BLACK

● Absolute Maximum Ratings(Ta=25°C)



Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	80	mW
Forward Current	I _F	30	mA
Peak Forward Current* ¹	I _{FP}	150	mA
Operating Temperature	Topr	-40°C~+85°C	
Storage Temperature	Tstg	-40°C~+85°C	

*¹Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width.

● Electrical and optical characteristics(Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Current	I_F	$V_F=5V$	-	10.5	15	mA
Luminous Intensity	I_v	$V_F=5V$	-	17	-	mcd
Peak Wave Length	λ_p	$V_F=5V$	-	562	-	nm
Dominant Wave Length	λ_d	$V_F=5V$	-	564	-	nm
Spectral Line Half-width	$\Delta\lambda$	$V_F=5V$	-	25	-	nm
Viewing Angle	$2\theta_{1/2}$	$V_F=5V$	-	45	-	deg
Radiant Intensity		$V_F=5V$	-	-	-	$\mu W/sr$
Chromaticity Coordinates	X	$V_F=5V$	-	0.40	-	
	Y		-	0.59	-	

● Typical electro-optical characteristics curves

Fig.1 Relative intensity vs. Wavelength

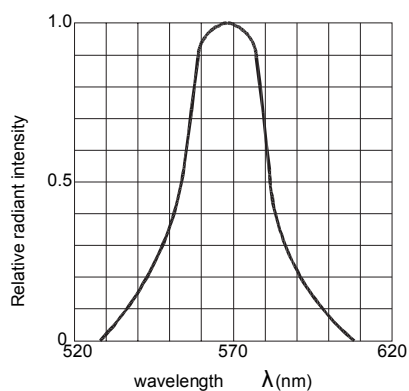


Fig.2 Forward current derating curve vs. Ambient temperature

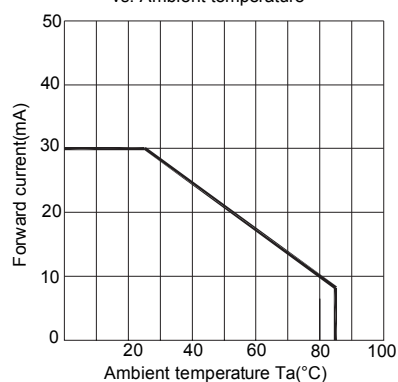


Fig.4 Relative luminous intensity vs. Ambient temperature



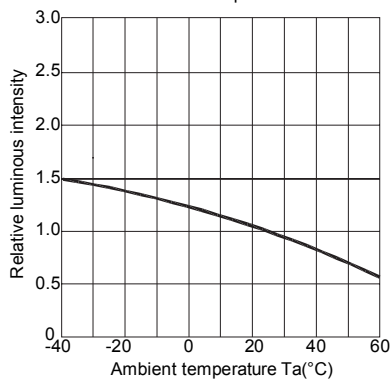


Fig.6 Radiation diagram

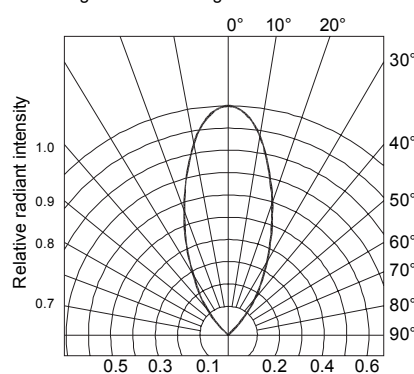

● Dip Soldering

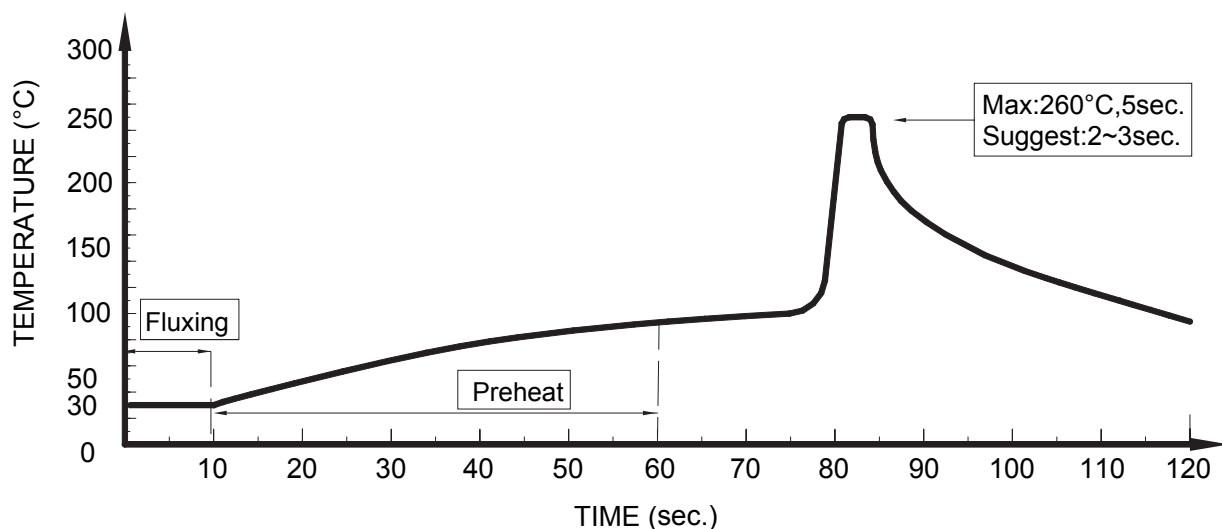

1. Please avoid any external stress applied to the lead-frames and epoxy while the LEDs are at high temperature, especially during soldering
2. DIP soldering and hand soldering should not be done more than one time.
3. After soldering, avoid the epoxy lens from mechanical shock or vibration until the LEDs are back to room temperature.
4. Avoid rapid cooling during temperature ramp-down process
5. Although the soldering condition is recommended above, soldering at the lowest possible temperature is feasible for the LEDs

● IRON Soldering

A : Max : 350°C Within 3 sec. One time only.

B : For 3mm without flange, if the LED epoxy lays flat on the PCB, the welding condition is 350°C within 2 seconds, one time only.

