


LTR	REVISION	DATE	APPD
-	RELEASED	11-07-94	
A	RVSD PER ECR 012304-WB01	01-27-04	RM

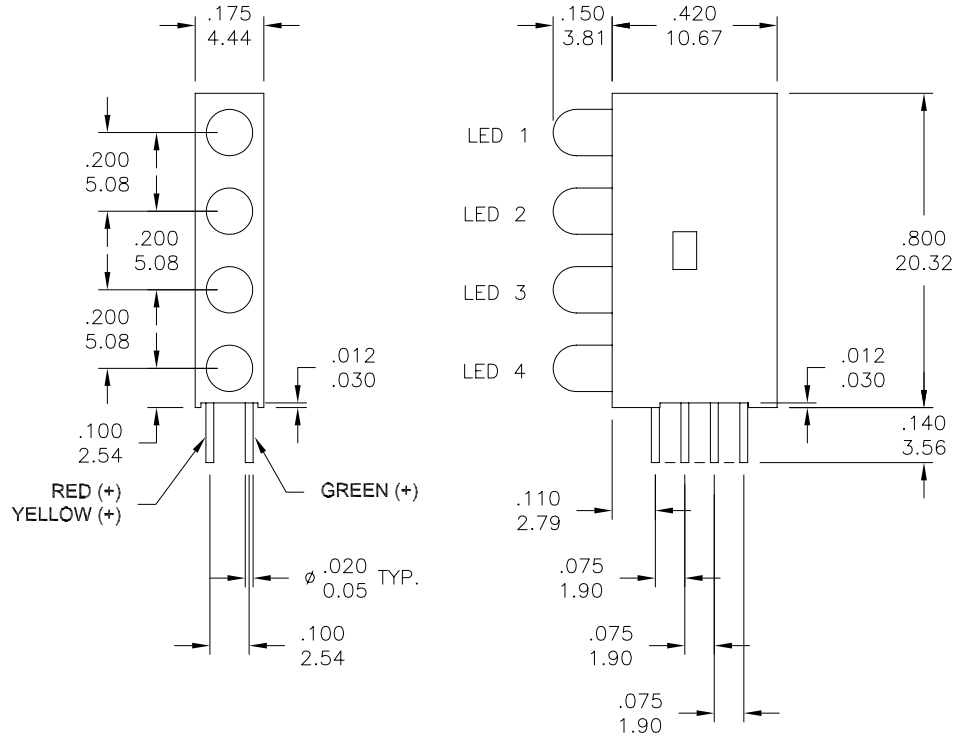

NOTES:

- ALL DIMENSIONS ARE IN INCHES
mm

MATERIALS:

HOUSING - NYLON 66 BLACK (UL94V-0)

LEDTRONICS PART NO.	L.E.D. RADIATION COLOR	L.E.D. APPEARANCE	ABSOLUTE MAXIMUM RATINGS (Ta=25°C)					ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)					
			Pd mW	Ifp mA	If mA	Vr V	Topr (°C)	If mA	Iv mcd typ	Vf=V typ/max	VIEW ANGLE 201/2	Ir max μA	λPeak nm
41PCT170TWRG4B	HI-EFF RED	CLEAR	100	150	30	5	-40 TO +80	20	45	2.0/2.6	55	100	635
	HI-EFF GREEN	CLEAR	100	150	30	5	-40 TO +80	20	50	2.2/2.6	55	100	568
41PCT170TWYG4B	YELLOW	CLEAR	100	150	30	5	-40 TO +80	20	45	2.1/2.6	120	100	585
	HI-EFF GREEN	CLEAR	100	150	30	5	-40 TO +80	20	50	2.2/2.6	120	100	568

LED[®]
LEDTRONICS, INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
information of LEDTRONICS, INC..
It may not be copied, used or disclosed
for any purpose without the prior express
written consent of LEDTRONICS, Inc..

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°/30°
FRACT. ± 1/32

TITLE					
41PCT170TWXXB					
DWG NO		SCALE		SHEET	
SDPC0056-CUST		2:1		1 OF 1	
DATE		CUSTOMER		08-24-95	
CODE		DWG BY		CHK BY	
IDENT NO.		JCH		QA	
8Z410		01-28-04		01-27-04	