
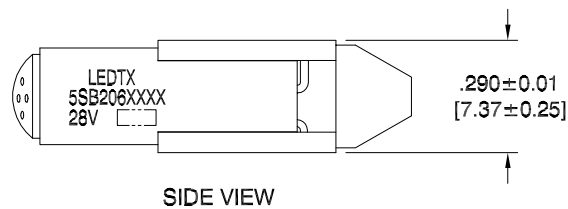


ACTUAL SIZE

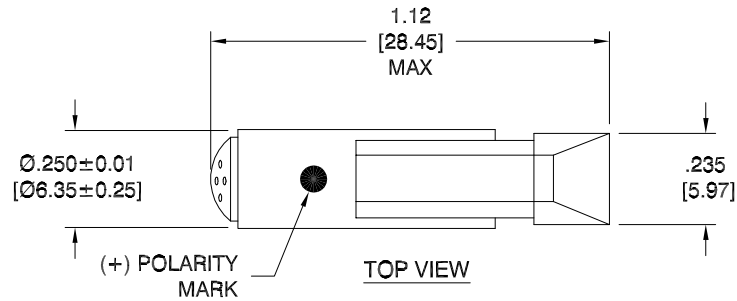

RoHS
COMPLIANT
2002/95/EC

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE
3. BASE MATERIAL: WEDGE = BAKELITE RESIN MELTS AT 200°C
FLANGE = NICKEL PLATE
4. REPLACES INCANDESCENT: 24PSB, 28PSB
5. OPERATING TEMPERATURE: ~ -30°C to ~ +50°C

REVISION NOTIFICATION

- ☐ DLC
☐ UL/ETL
☐ MADE IN USA
☐ CUSTOMER _____
☐ OTHER _____

REDLINE CHECKLIST

- ☐ REDLINE(YES)
☐ DATE: _____
☐ INITIATED BY: _____
☐ ECR REQUIRED YES ☐ NO ☐
☐ WORK ORDER# _____

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

5SB206-0PB-028V	-	SUPER BLUE	24/28Vdc(@28Vdc)	-	0.012-0.014 A	0.150cd	462	160°
5SB206CLW7-0001	5SB206CLW7-28V	ULTRA LIME WHITE	24/28Vdc(@28Vdc)	0.392 W	0.012-0.014 A	0.125cd	592/565	160°
5SB206CR7-0001	5SB206CR7-28V	ULTRA RED	24/28Vdc(@28Vdc)	-	0.012-0.014 A	-	657	160°
5SB206CW6-0004	5SB206CW6-28V	PALE YELLOW WHITE	24/28Vdc(@28Vdc)	0.392 W	0.012-0.014 A	0.075cd	631/565	160°
5SB206CY6-0008	5SB206CY6-28V-BP	YELLOW	24/28Vdc(@28Vdc)	-	0.012-0.014 A	-	585	160°
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

LED[®]
LEDTRONICS, TM INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°.30'
FRACT. ± 1/32

TITLE

5SB206-0XX-028V
5SB206CXXX-000X

DWG NO**SCALE****SHEET****DATE**

5SB206-28V-DC

2:1

1 OF 1

10-28-11

CODE
IDENT NO.
8Z410

DWG BY
GP
10-28-11

CHK BY

QA
EE
05-21-18

MFG
LD
05-21-18

R&D
KS
05-21-18