




LTR	REVISION	DATE	APPD
B	031119-HF01: ADDED P/N: B3127CG5-0009	03-11-19	HF




TOP VIEW



SIDE VIEW



REAR VIEW

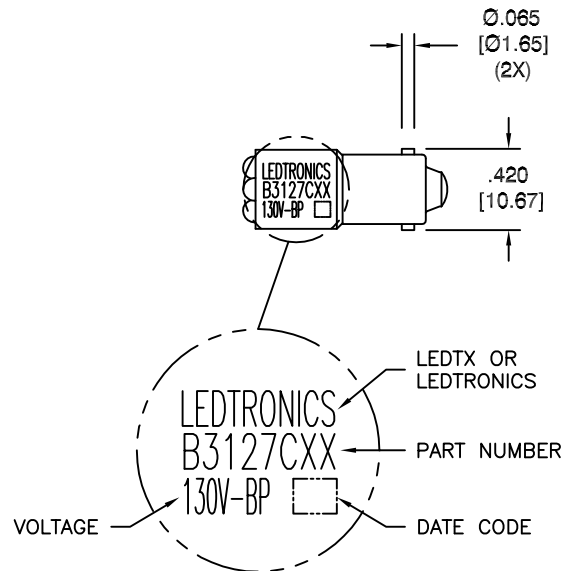

ROTATED 90°

RoHS
COMPLIANT
2002/95/EC

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE FR530 (UL94V-1 MINIMUM, UL94V-0 PREFERRED)
3. BASE MATERIAL: (BODY) BRASS & NICKEL PLATED BRASS (BARREL)
4. OPERATING TEMPERATURE: ~-30°C TO ~+50°C

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

B3127CG5-0009	B3127CG5-130V/10-BP	HI-EFF GREEN	130Vdc	0.025/0.027 A	-	-	568	60°
B3127CG6-0004	B3127CG6-130V/10-BP	HI-EFF GREEN	130Vdc	0.007 A	0.91W	0.380cd	566	60°
B3127CR6-0004	B3127CR6-130V/10-BP	ULTRA RED	130Vdc	0.007 A	0.91W	0.525cd	654	60°
B3127C05-0008	B3127C05-130V/10-BP	ORANGE	130Vdc	0.010 A	-	-	610	50°
B3127CY5-0006	B3127CY5-130V/10-BP	YELLOW	130Vdc	0.007 A	0.91W	0.210cd	585	45°
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V (typ.)	CURRENT (A)	POWER (W)	MAXIMUM CANDELA	λP nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

LED[®]
LEDTRONICS,™ INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
Information of LEDTRONICS, INC.
It may not be copied, used or disclosed
for any purpose without the prior express
written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE
B3127CXX-000X
(B3127CXX-130V/10-BP)

DWG NO		SCALE		SHEET		DATE	
B3127-130V-BP		1:1		1 OF 1		08-27-12	
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D		
8Z410	GP 08-27-12		EE 03-26-19	LD 03-26-19	UF 03-26-19		

REVISION NOTIFICATION

- ☐ DLC
☐ UL/ETL
☐ MADE IN USA
☐ CUSTOMER _____
☐ OTHER _____

REDLINE CHECKLIST

- ☐ REDLINE(YES)
☐ DATE: _____
☐ INITIATED BY: _____
☐ ECR REQUIRED YES ☐ NO ☐
☐ WORK ORDER# _____