




ACTUAL SIZE


Ø.335
[Ø8.51]

Ø.290
[Ø7.37]

TOP VIEW

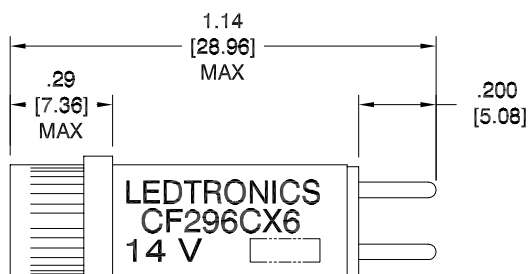

SIDE VIEW

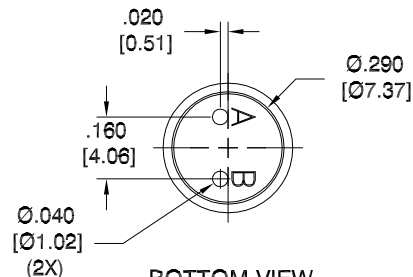

BOTTOM VIEW



NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. MOUNTING DIAMETER: Ø9/32"
3. LENS MATERIAL: LEXAN 101-112
4. SLEEVE MATERIAL / COLOR: NYLON 66 (DUPONT: ZYTEL 101L) / BLACK
5. HEADER MATERIAL / COLOR: NYLON 66 (DUPONT: ZYTEL 101L) / BLACK

REVISION NOTIFICATION

- ☐ DLC
- ☐ UL/ETL
- ☐ MADE IN USA
- ☐ CUSTOMER _____
- ☐ OTHER _____

REDLINE CHECKLIST

- ☐ REDLINE(YES)
- ☐ DATE: _____
- ☐ INITIATED BY: _____
- ☐ ECR REQUIRED YES ☐ NO ☐
- ☐ WORK ORDER# _____

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

CF296CR6-0008	CF296CR6-14V/30-B	ULTRA RED	14Vdc	0.4 W	0.032 A	7.7 mcd	0.010	0.127 lm	639nm	160°
CF296CY6-0004	CF296CY6-14V/30-B	YELLOW	14Vdc	0.4 W	0.026 A	8.5 mcd	0.009	0.114 lm	590nm	150°
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	LUMINOUS INTENSITY	SCP	TOTAL LUMENS	λ P nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

LED[®]
LEDTRONICS, TM INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
information of LEDTRONICS, INC.
It may not be copied, used or disclosed
for any purpose without the prior express
written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE

CF296CX6-000X
(CF296CX6-14V/30-B)

DWG NO

CF296-14V-DC

SCALE

2:1

SHEET

1 OF 1

DATE

01-06-20

CODE
IDENT NO.
8Z410

DWG BY
GP
01-06-20

CHK BY

QA
LUV
01-08-20

MFG
LD
01-07-20

R&D
UF
01-07-20