



LTR	REVISION	DATE	APPD
-	RELEASED	02-10-12	



ACTUAL SIZE

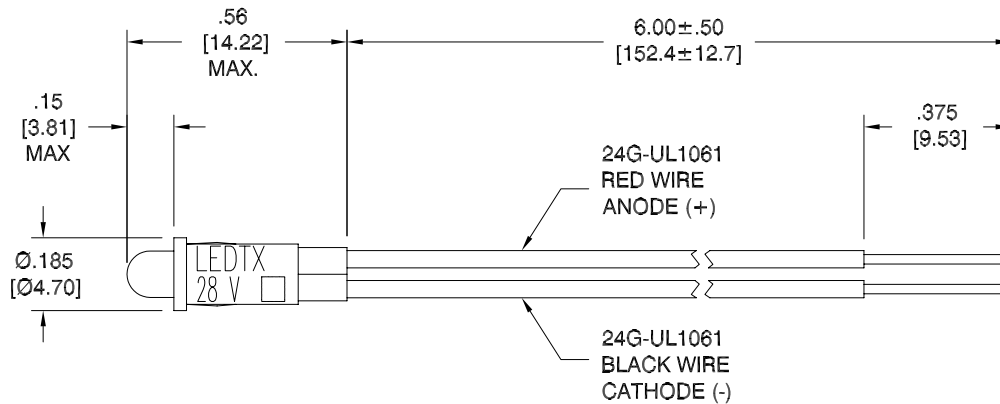

RoHS
COMPLIANT
2002/95/EC

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. MOUNTING DIAMETER: Ø5/32" [4.0mm]
3. SLEEVE MATERIAL: BLACK, NYLON 66

REVISION NOTIFICATION

☐	PMA
☐	UL
☐	MADE IN USA
☐	CUSTOMER _____
☐	OTHER

PP156TG4-28V-W6	HI-EFF GREEN	28VDC	0.010-0.012 A	0.009cd	562	50°
PP156TR4-28V-W6	HI-EFF RED	28VDC	0.010-0.012 A	0.016cd	642	55°
PP156TY4-28V-W6	YELLOW	28VDC	0.010-0.012 A	0.012cd	582	45°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	CURRENT (A)	MAXIMUM CANDELA	λP nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)
		ELECTRICAL TEST				

LED[®]
LEDTRONICS, INC.[™]
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
information of LEDTRONICS, INC.
It may not be copied, used or disclosed
for any purpose without the prior express
written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE **PP156TX4-28V-W6**

DWG NO	SCALE	SHEET	DATE
PP156-28VDC-W6	2:1	1 OF 1	02-10-12
CODE IDENT NO. 8Z410	DWG BY GP 02-10-12	CHK BY PL 02-13-12	QA MFG R&D