



UPC Code : 078477326411

Country Of Origin : Mexico

RoHS Compliant : Yes

CS8369

50Amp, 3-Phase 250V AC, Non-NEMA, 3P, 4W, Black & White Locking Flush Mount Receptacle, Industrial Grade, Grounding, California-Style(CS) – BLACK

Leviton Black & White 50Amp Non-NEMA Locking devices are designed for faster wiring and longer life. Made from tough, impact-resistant nylon housings and metal shrouds, these plugs, connectors, receptacles and flanged inlets are designed for rugged environments like construction sites, commercial shipyards and convention centers.

Technical Information

Electrical Specifications

Amperage : 50 A

Current Interrupting : Certified for current interrupting at full rated current

Dielectric Voltage Withstand : 2000V minimum per UL 498

Grounding : Grounding

Maximum Working Voltage : 3-Phase 250V as rated

Phase : 3-Phase

Pole : 3

Temperature Rise : Max 30°C temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

Voltage : 250 VAC

Wire : 4

Environmental Specifications

Environment : Dry

Flammability : UL94 V-0

Operating Temperature : -40°C to 75°C

Material Specifications

Assembly Rivets : SS 302/304

Back Cover : Flame-retardant Nylon

Body & Contract Carrier : Flame-retardant Nylon

Box Terminal : 0.062inch thick Copper

Center Pin : SS 302/304

Color : Black

Compression Nut, Strain Relief : 0.100-inch thick Brass

Connector Contact - Binding Plate : 0.100-inch thick Brass

Connector Contact - Spring : 0.041-inch thick Brass

Contact Rivet : Brass

Face Module : Flame-retardant Nylon

Mounting Screws : SS 302/304

Mounting Strap : Single piece SS 302/304

Shroud : .062-inch thick Nickel Plated Steel

Terminal Block : 0.062-inch thick Copper

Terminal Set Screw : SS 302/304

Mechanical Specifications

Product ID : Ratings and Catalogue No. molded into face

Terminal Accom. : AWG #10 to #6 for Ground (stranded only), and AWG #10 to #4 for line terminals

Terminal ID : X, W, Y, and Green for ground

Product Features

Brand : Black and White

Color : Black

Device Type : Locking Receptacle

NEMA : Non-NEMA

Standards and Certifications


CSA C22.2 No. 42 : File 152105

NOM : 057

RoHS : Compliant

UL 498 : File E13399

Warranty : Limited Lifetime Warranty

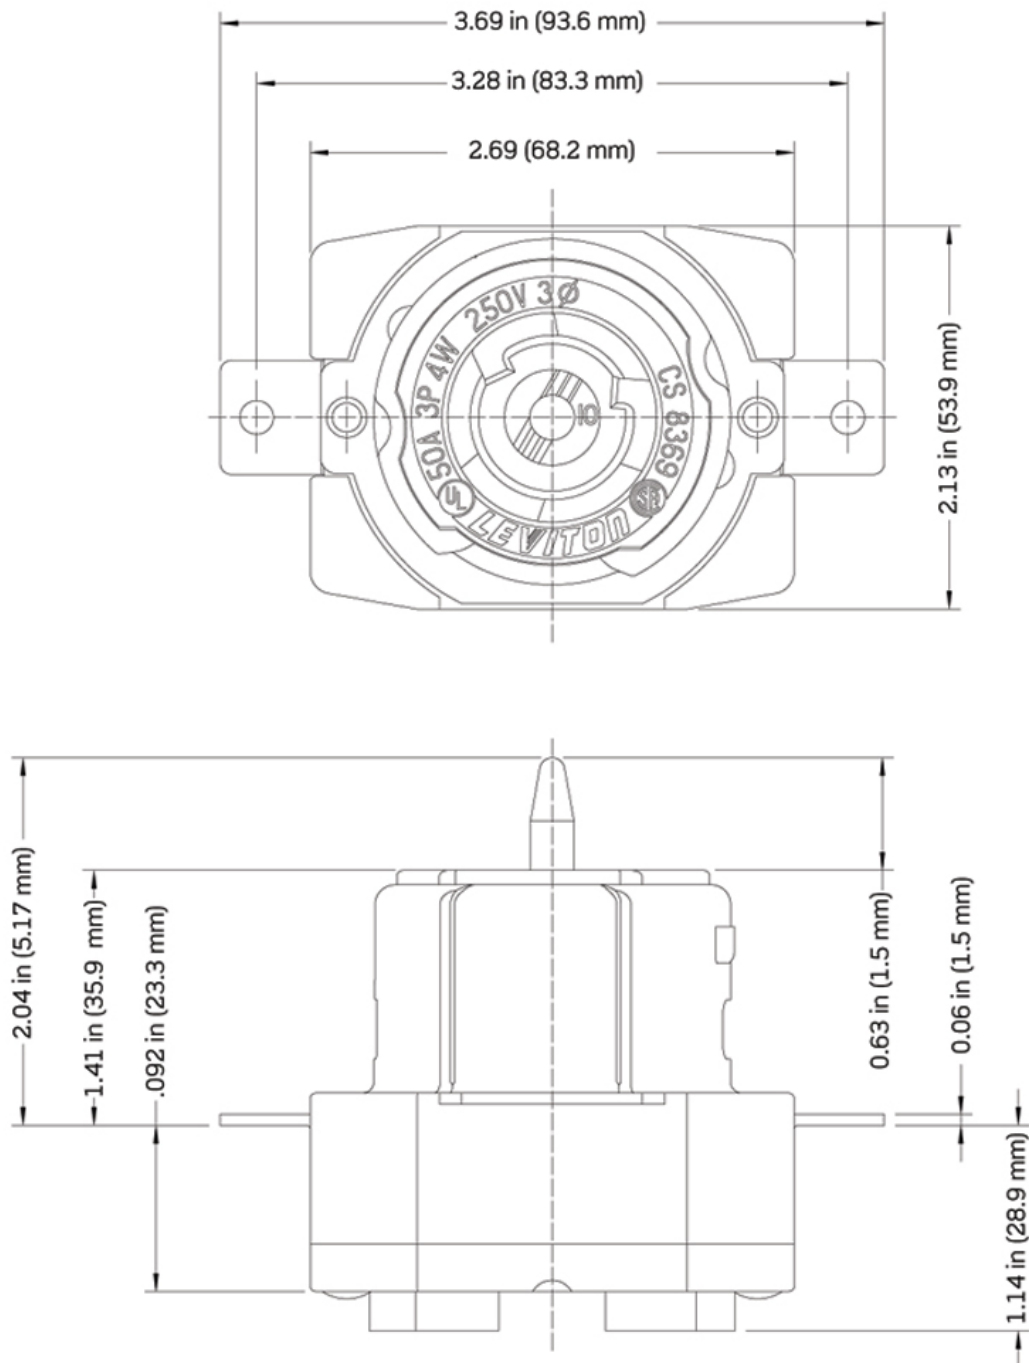

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER: 		

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2021 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

