



MOBILE COIL ANTENNAS

Elastomer Spring Packages

Premium mobile load coil antennas are industry standard

Our ongoing commitment to refinement in mechanical and electrical design has resulted in the release of our latest product, the mobile coil antenna with an elastomer spring. The new elastomer spring provides increased flexibility, better shape retention, and eliminates electronic noise & road noise compared to stainless steel springs. The mobile coil antennas will continue to maintain all of the features that make them unique, such as stainless steel whips, housings constructed with ABS material injection molded around a solid brass insert, and gold plated push pin contacts. Together, the mobile coil antenna and elastomer spring, make these products the obvious choice for quality and long lasting value for demanding mobile radio communications.

ORDERING INFORMATION



BASE ANTENNA	ANTENNA W/ ELASTOMER SPRING PN	DESCRIPTION	GAIN
B1322N	B1322NR	132 - 174 MHz Chrome, NGP, Elast Spr	2 dBi
	BB1322NR	132 - 174 MHz Black, Elast Spr	2 dBi
B1323-L	B1323R	132 - 174 MHz Chrome, Elast Spr	3 dBi
	BB1323R	132 - 174 MHz Black, Elast Spr	3 dBi
B1442N	B1442NR	144 - 174 MHz Chrome, NGP, Elast Spr	2 dBi
	BB1442NR	144 - 174 MHz Black, NGP, Elast Spr	2 dBi
B1443-L	B1443R	144 - 174 MHz Chrome, Elast Spr	3 dBi
	BB1443R	144 - 174 MHz Black, Elast Spr	3 dBi
B4502N-L	B4502NR	450 - 470 MHz Chrome, NGP, Elast Spr	2 dBi
B4503-L	B4503R	450 - 470 MHz Chrome, Elast Spr	3 dBi
	BB4503R	450 - 470 MHz Black, Elast Spr	3 dBi
B4505C	BB4505CR	450 - 470 MHz Black, Elast Spr	5 dBi
B7603-L	BB7603R	760 - 870 MHz Chrome, GP, Elast Spr	3 dBi
B8965CN	B8965CNR	896 - 970 MHz Chrome, NGP, Elast Spr	5 dBi
	BB8965CNR	896 - 970 MHz Chrome, NGP, Elast Spr	5 dBi
Replacement Elastomer Springs	SRS-062-C-001	Replacement Rubber Spring, 0.062" Rod Diameter	
	SRS-100-C-001	Replacement Rubber Spring, 0.100" Rod Diameter	
	SRS-125-C-001	Replacement Rubber Spring, 0.125" Rod Diameter	

ENVIRONMENTAL SPECIFICATION	
Operating Temp	-45 to 85°C
Storage Temp	-45 to 85°C
Wind Speed Survivability	100 mph+
Cold	-45
Heat	85
Temperature Shock	N/A
Humidity	85% @ 85°C
Rain / Ingress	N/A (IP67 targeted spec/ standard)
Salt Fog	N/A
Flammability	N/A
Vibrations	N/A

DIMENSIONAL SPECIFICATION	
Height	65-85 mm Depends on Whip OD options
Base OD	22 mm
Installation Threads	5/16--24
Whip Diameter	0.100", 0.062" & 0.125" Options
Whip Lock	Dual Set Screw
Nut Size	23 mm hex

MATERIALS SPECIFICATION	
Body Material	EPDM Rubber
Ferrule Material	Chrome Plated Brass

VHF - STAINLESS STEEL VS. ELASTOMER SPRING

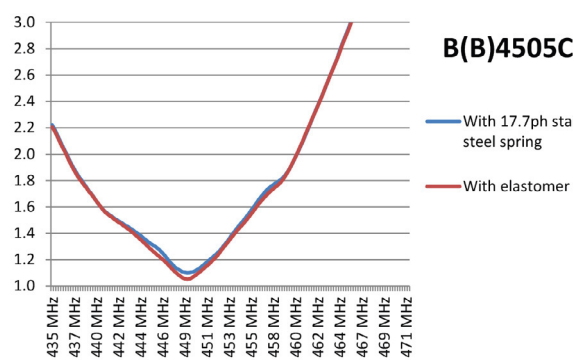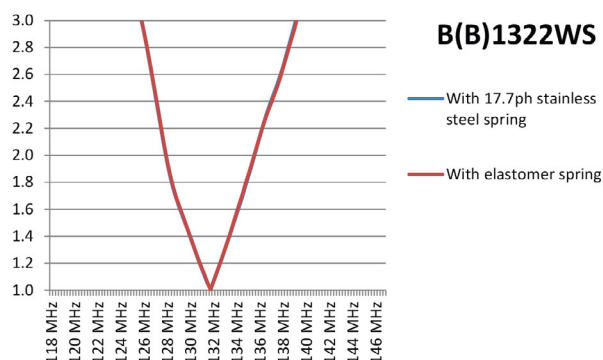

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original