



LPS69273NT

Omni SISO 3G-4G Disk/Puck 698-960 MHz/1710-2700 MHz

The patent-pending LPS69273NT antenna is a multiband low profile omnidirectional disk/puck antenna operating over the 698-960 MHz and 1710-2700 MHz frequency bands. Designed to be a surface mount antenna that performs well on metallic and non-metallic* surfaces, the antenna is ideal for use in Machine-to-Machine (M2M) applications. The housing incorporates a low profile, rugged design that conforms to IP67 standards making the antenna suitable for both indoor and outdoor applications.

FEATURES AND BENEFITS

- Low profile, aesthetically-neutral housing
- Surface mount with stud and locking nut
- Designed for both indoors and outdoors
- IP67-rated for harsh environments
- Both 3G/4G LTE and Wi-Fi communications
- Made for both metal and non-metallic* surfaces

* Requires a 300-millimeter diameter ground plane kit (order separately with P/N HKIT-LPx-001)

ELECTRICAL SPECIFICATION

Frequency Band (MHz)	698-806	824-894	880-960	1710-1880	1850-1990	1910-2170	2300-2500	2500-2700
VSWR (Typ)	<2.7:1	<2.9:1	<2.8:1	<2.1:1	<1.7:1	<1.7:1	<2.3:1	<2.3:1
VSWR (Max)	<3.0:1	<3.0:1	<3.0:1	<3.0:1	<3.0:1	<3.0:1	<3.0:1	<3.0:1
Peak Gain dBi (Typ)								
On Metal Housing	2.1	0.7	1.7	5.4	4.6	4.5	3.4	3.7
On Plastic Housing w/ Ground Plane Kit	2.4	1.1	2.3	5.5	4.4	4.0	3.8	3.8
Peak Gain dBi (Max)								
On Metal Housing	2.5	1.1	2.3	5.9	4.8	4.9	3.8	4.0
On Plastic Housing w/ Ground Plane Kit	2.9	1.4	3.1	5.9	5.3	4.3	4.4	4.3
Nominal Impedence	50							
Max Power - ambient temp 25°C	10							
Polarization	Linear, Vertical							
Azimuth Beamwidth	Omnidirectional							

MECHANICAL SPECIFICATIONS

Dimensions - diameter x height - mm (inches)	Ø127 x 31 (Ø5 x 1.22)
Weight - kg (lbs.)	Approximately 0.2 (0.44)
Cable Type	RG316
Radome Material and Color	PC, UV stable, UL94-VO- material, black

ENVIRONMENTAL SPECIFICATIONS

Operating Environment	Indoor or outdoor
Operating Temperature - °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Ingress Protection Rating	IP67
Material Substance Compliance	RoHS

CONFIGURATION


PART NUMBER	CABLE LENGTH	CONNECTOR
LPS69273NT-61SMAM	610 mm (24 in.)	SMA Male
LPS69273NT-61RTNM	610 mm (24 in.)	RTNC Male

MOUNTING



A threaded post on the back of the antenna and a supplied mounting nut is the primary mounting method when access is available to both sides of the mounting surface, such as a ceiling of a truck, meter, and vending machine. Mark the desired mounting location on the tile and cut a $\varnothing 20$ mm (0.8") hole for threaded post. Feed the cables through the hole and secure the antenna with the mounting nut.

The included rubber locking gasket should only be used with the mounting nut when mounting to a hard surface.

Note: You should mount the antenna on the desired location before you connect the cable. This ensures that you do not twist or damage the cable during the mounting of the antenna.


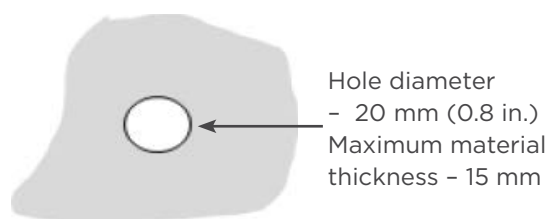


HOUSING CONFIGURATIONS

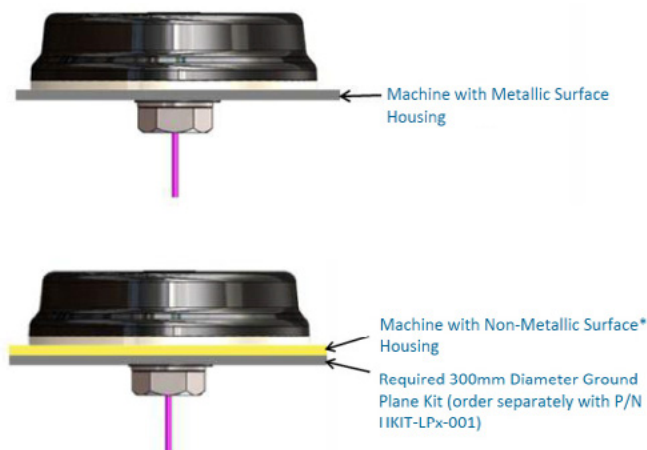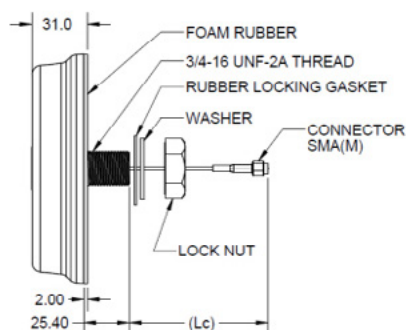

OPTIONAL GROUND PLANE KIT



For mounting on a non-metallic surface – Hardware Kit Part Number: HKIT-LPx-001

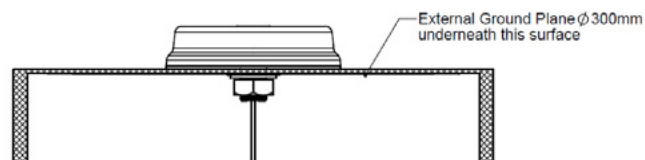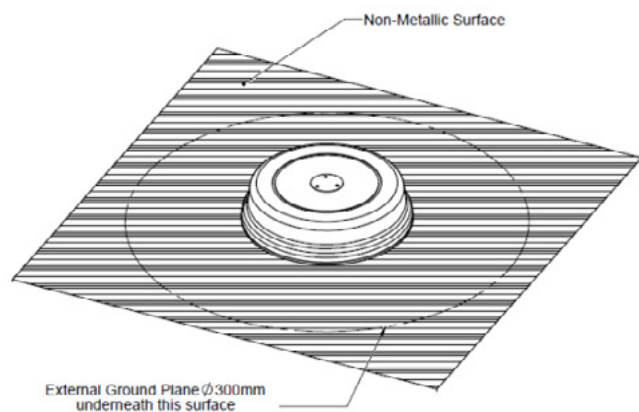

698 MHZ



RADIATION PATTERNS

880 MHZ

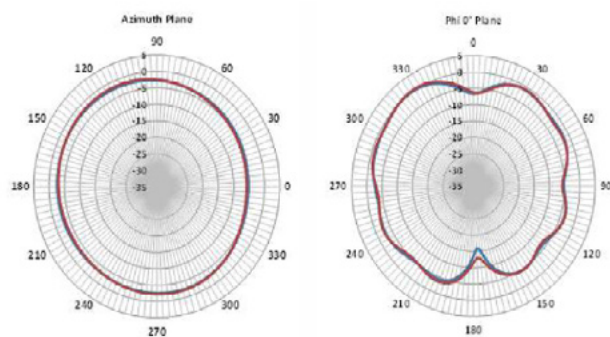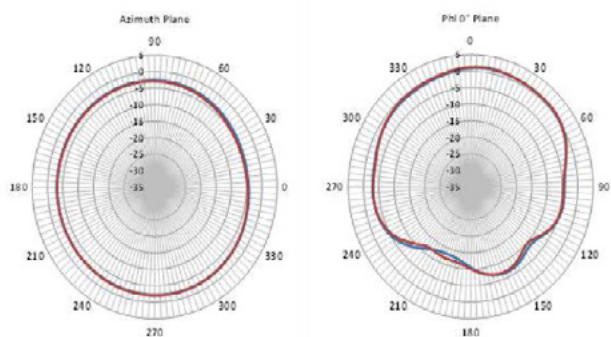

960 MHZ


1710 MHZ

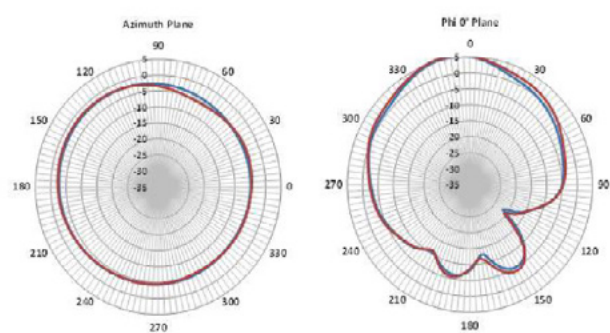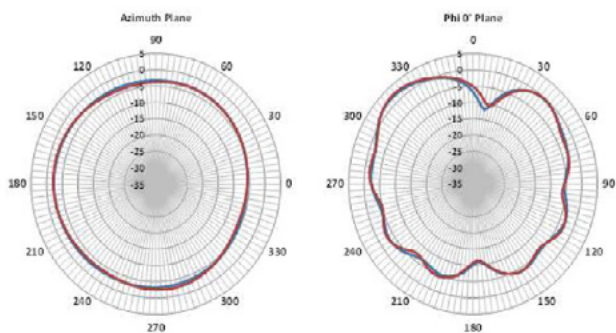


— On metal housing
— On plastic housing with ground plane kit

RADIATION PATTERNS


1950 MHZ

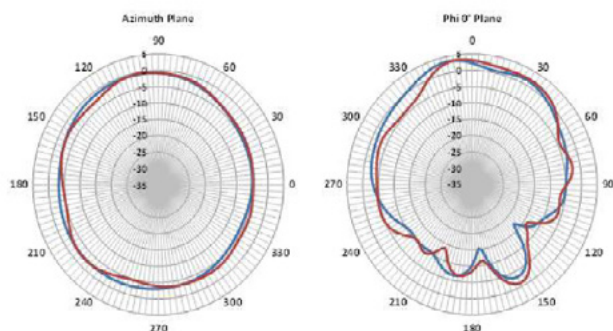

2170 MHZ

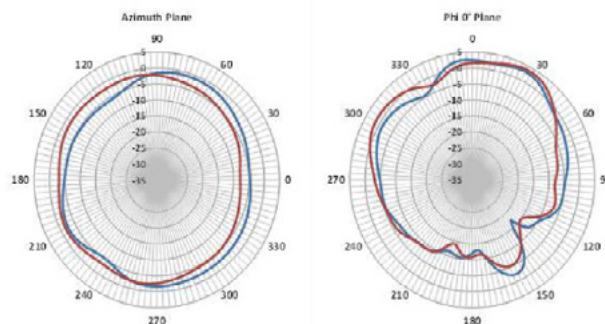

2700 MHZ

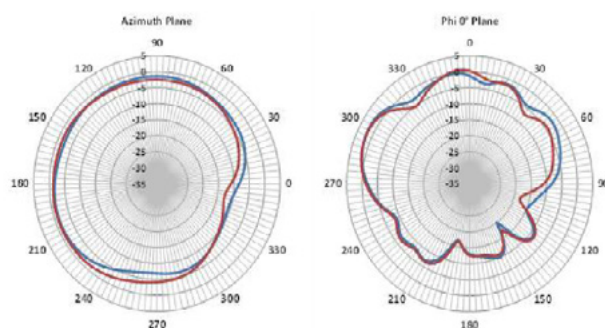

— On metal housing
— On plastic housing with ground plane kit

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original