

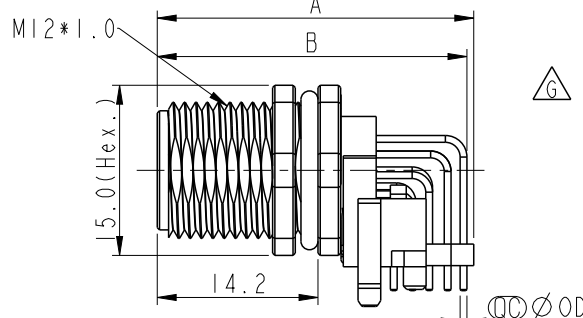
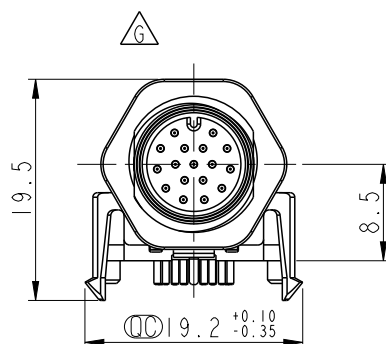




 MSAS-XXPMMR-SF7003

XX: No. Of Pin

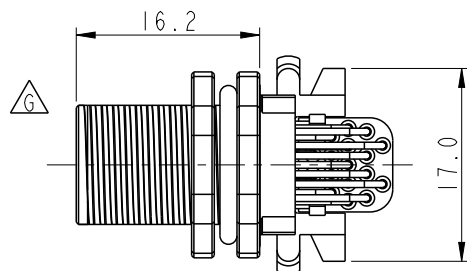


MSAS-03PMMR-SF7003	26.1	25.0	1.0
MSAS-04PMMR-SF7003	26.1	25.0	1.0
MSAS-05PMMR-SF7003	26.1	25.0	1.0
MSAS-06PMMR-SF7003	25.9	25.2	0.8
MSAS-08PMMR-SF7003	25.9	25.2	0.8
MSAS-17PMMR-SF7003	27.9	27.3	0.6


Item No.	A	B	OD
----------	---	---	----




3P




4P




5P




6 P



8P



4

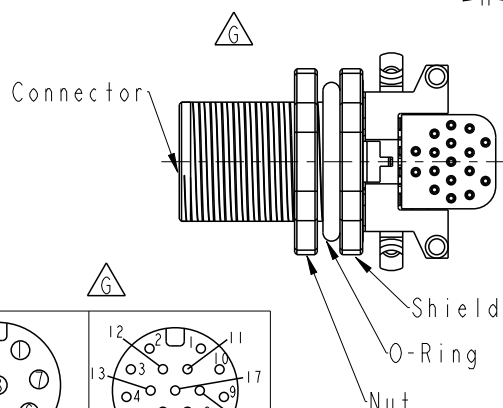


Shield
O-Ring
ut

△ Note:

- * RoHS Compliant
- *  Important dimension
- △ E *
- * Waterproof rate: IP67, mated
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- O-Ring: Rubber, Black
- * Shield: Metal
- * Nut: Metal
- * O-Ring: Rubber, Gray
- * For panel thickness max: 3.0mm
- △ C *
- * For pcb thickness max: 1.6mm
- * Nut is packed separately in pe bag

UNIT: mm



TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

TITLE N SEN, M12 A -SHLD, SCREW RECEPTACLE, M, M, PCB R 			
SCALE 3:2	SIZE A4	SHEET 1 OF 3	
REV. H	WC-REV. A.3	<u>QC</u> : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Yunchen	2024-10-14
DWG NO	CHECKED BY	DATE
MSAS-XXPMMR-SF7003	Aric	2024-10-14
CUSTOMER	APPROVED BY	DATE
ALTW	Fred	2024-10-14

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.