


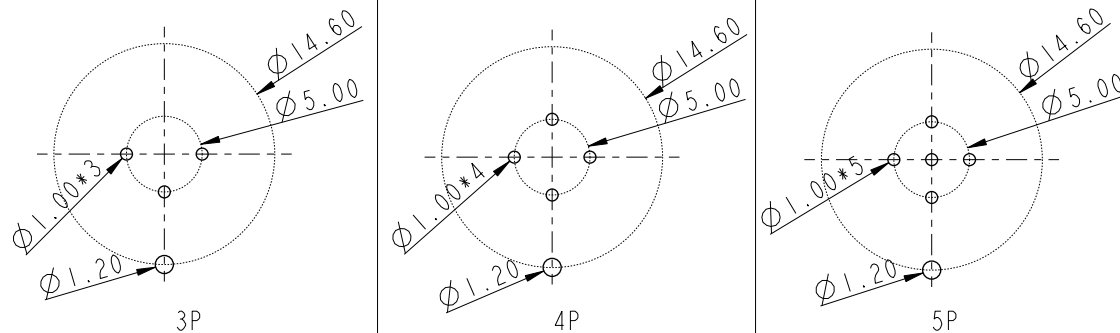
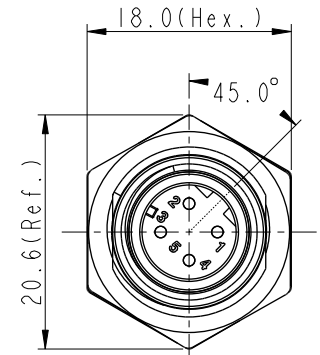



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
F	C210309	2021/03/12	Ruru	 X2
G	C221973	2022/12/26	Ruru	 X1
H	C231034	2023/08/10	Ruru	 X1

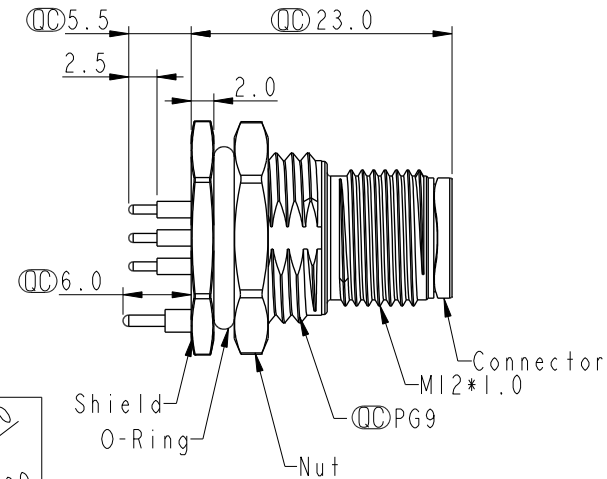


Recommended
Panel Cut-Out




PCB Layout



3P



4P



5P

Pin Assignment Front View

Note:

- * RoHS Compliant
- *  Important dimension
- *  Waterproof rate: IP68, unmated 1m/24h
 IP69K, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
- *  Shield: Metal
- *  Nut: Metal
- * O-Ring: Rubber, Black
- * For panel thickness max: 4.5mm
- * Nut is packed separately in pe bag

UNIT:mm				TITLE N SEN, M12 D -SHLD, SCREW RECEPTACLE, M, M, PCB S			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY Yulong_wang		DATE 2016-08-24	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±		SCALE 3:2		SIZE A4		SHEET 1 OF 1			DWG. NO MSDS-XXPMP-SF8001		CHECKED BY Jinhai		DATE 2016-08-24	
		REV. H		WC-REV. A.5		QC: Inspection item			CUSTOMER ALTW		APPROVED BY Jerry		DATE 2016-08-24	