




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	LEN1590225~28	2015/08/31	Doreen	New Logo updated to "ALTW".
F	LEN16C0059~62	2016/12/20	Neo	Changed Title
G	C211612	2021/10/26	San	$\triangle G$ X2

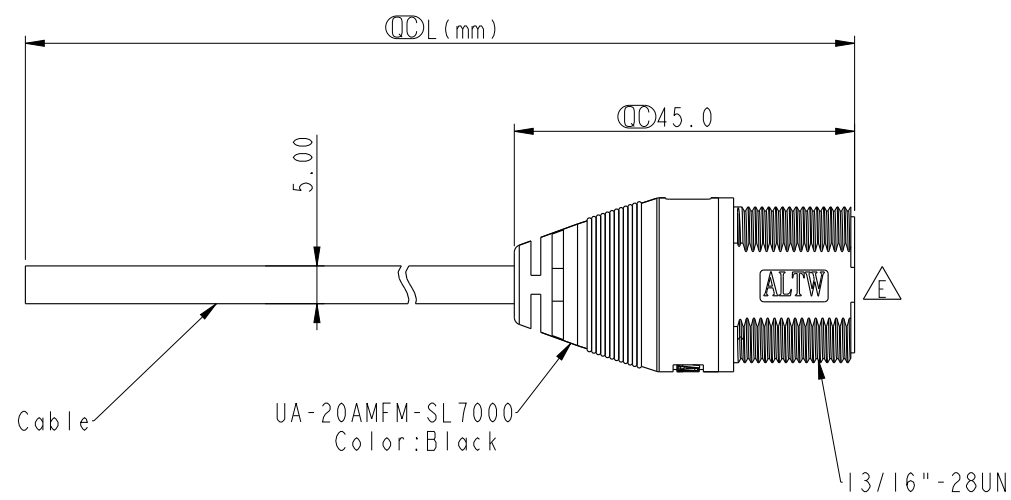

UA-20AMFM-SL7AXX
I
XX : 01~05Meters
01 : 01Meter
02 : 02Meters
:
:
05 : 05Meters
Cable Length(L): 01~05Meters

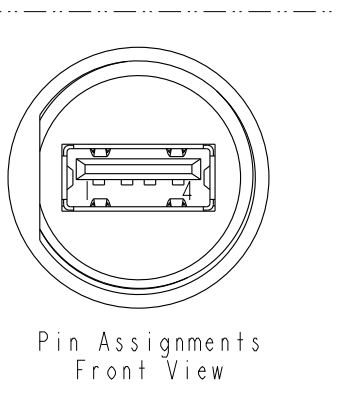

Drain 地線	Shield
Black 黑	4
Green 綠	3
White 白	2
Red 紅	1
Wire Color	Conn
Pin Out	

Twist

Note:
* ϕ Important Dimension.
* Waterproof Rate: IPX7, Mated
* Housing: Thermoplastic, Black
* Jack: USB A TYPE
* Cable: USB2.0 28#*1P+24#*2C
+Al/My+B+D, PVC, UV Resist OD=5.0, Black
 $\triangle G$ $\triangle E$ * Cable Length Tolerance: $\leq 0.3M$ +25/-0
 $> 0.3M \sim 1.5M$ +50/-0
 $> 1.5M \sim 3M$ +100/-0
 $> 3M \sim 5M$ +150/-0

UNIT:mm		TITLE USB, A TYPE, 2.0, CABLE W/SR M, F, MOLDING, SCREW $\triangle G$
TOLERANCE ± 0.5	SCALE 1:1	SIZE A4
	REV. G	SHEET 1 OF 1
	WC-REV. A.1	ϕ Inspection item

Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Neo	DATE 2016/12/20
		DWG NO UA-20AMFM-SL7AXX	CHECKED BY Kris	DATE 2016/12/20
		CUSTOMER ALTW	APPROVED BY Max	DATE 2016/12/20