
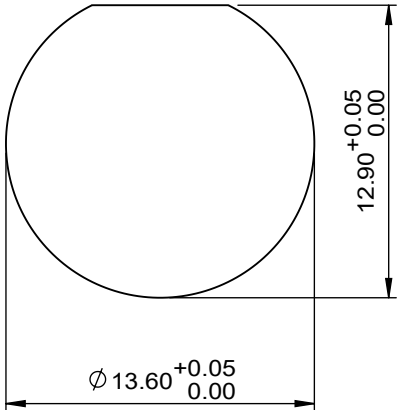
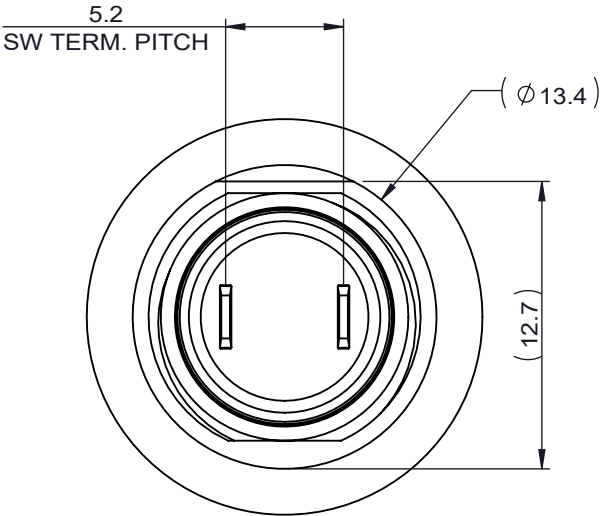


W49- 11 X

BUTTON CODE	BUTTON COLOR DESCRIPTION
1	BLACK
2	RED
3	GREEN
4	WHITE
5	YELLOW
6	BLUE
7	ORANGE

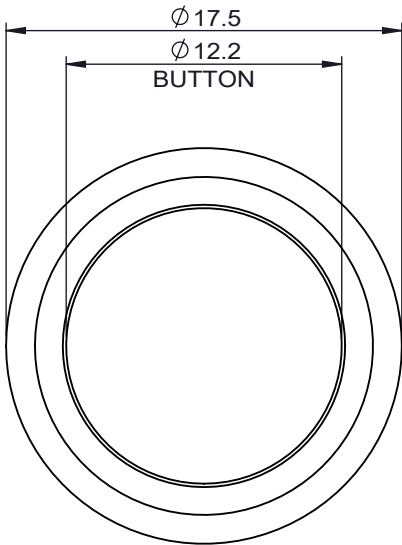

RECOMMENED PANLE CUT-OUT

MECHANICAL CHARACTERISTICS:

SWITCH CIRCUITRY: SPST-NO-DB
SWITCH ACTION: MOMENTARY
BUTTON TRAVEL: 2.3mm NOMINAL
OPERATING FORCE: 306g [3N] NOMINAL
PANEL THICKNESS: 1.5 - 3.0mm
CONTACTS: GOLD PLATED
LIFE(MECHANICAL): 1000K CYCLES
NUT TORQUE FORCE: MAX 6 kgf-cm

ENVIRONMENTAL SPECIFICATIONS:




ACTUATOR INGRESS PROTECTION: IP67
OPERATING TEMPERATURE: -40°C to +105°C

ELECTRICAL SPECIFICATIONS:

SWITCHING POWER(max): 16 VA AC
CURRENT RATINGS: 400mA@32VAC, 500K CYCLES NOMINAL
125mA@125VAC, 500K CYCLES NOMINAL
100mA@50VDC, 500K CYCLES NOMINAL
DIELECTRIC STRENGTH: 1,000VAC
INSULATION RESISTANCE: 1G OHM
CONTACT RESISTANCE: 50m OHMS MAX INITIA

NOTE:

1. SUPPLY HEX NET AND SEALING ORING BULK IN PACKED

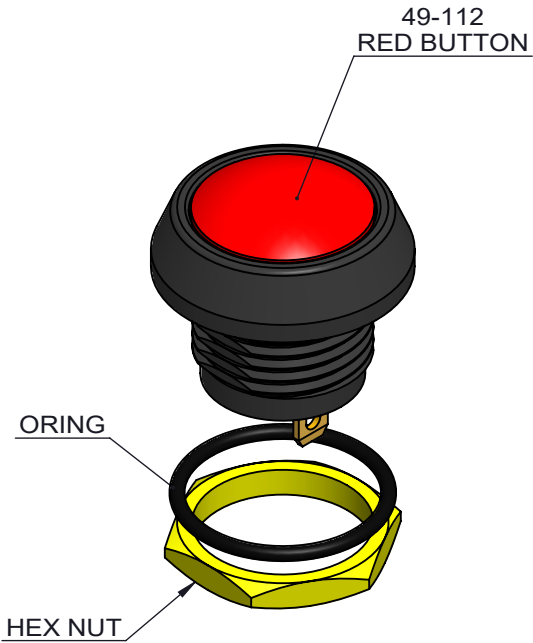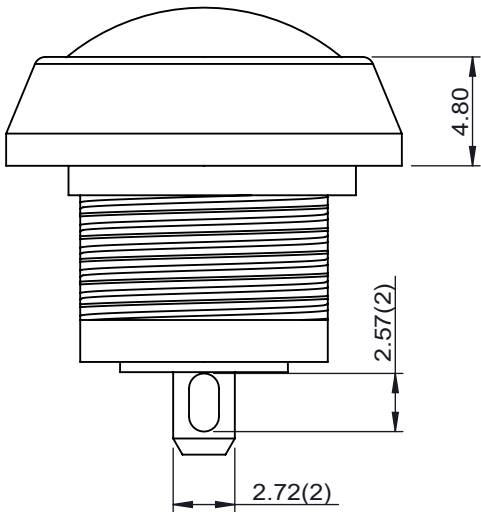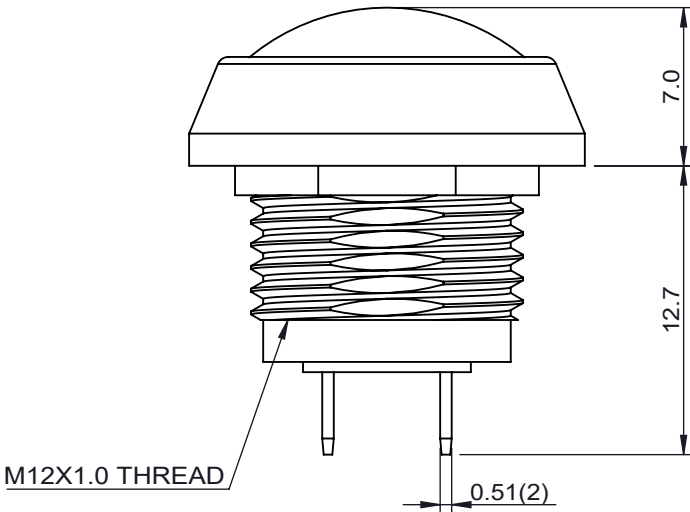

DWG TYPE SALES DRAWING	DRAWN <i>K.Y.</i>	TOLERANCES: UNLESS OTHERWISE NOTED X.X ± 0.5 X.XX ± 0.25 ANGULAR ± 5°	DWG TITLE W49- SERIES ,MECHANICAL MOMENTARY					
STATUS RELEASE	REVIEW <i>v.w.</i>		DWG NO. W49-11X					
This document is the intellectual property of ITW Electronic Business Asia Co., Limited and may contain confidential, proprietary, privileged information protected by law. Neither this document nor any information it contains can be reproduced, transformed to any other format, or distributed, without written permission by ITW Electronic Business Asia Co., Limited. 本文為安天德百電股份有限公司之智慧財產，非經許可不得 翻取、複製、轉變成其他形式使用或散佈	APPROVED <i>v.w.</i>	THIRD ANGLE PROJECTION 						
	DATE 2021/6/7	REF: 49-11X(L)	☒ 管制文件 ☐ 非管制文件	Unit mm	SCALE -	REV 1	RoHS Compliant	SHEET 1 OF 2