

Product data sheet

Specifications



Socket, SE Relays general purpose relay accessory, DPDT, 16A, 300V, 8 pins, lift terminals, lock plastic clip, 750R

70-750EL8-1

⚠ To be discontinued

⚠ To be discontinued on: Sep 30, 2025

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Product Range	Legacy
Product Type	Socket
Product Compatibility	relay 750XBXR suppressor module 70-ASMM diode 70-ASMD signalling device 70-ASMLG suppressor module 70-ASMR jumper wire 16-750CBJ-1
Number of Terminals	8
Switch Function	DPDT
Contact Composition	2 NO + 2 NC

Complementary

Rated Current	16 A
[Ue] rated operational voltage	300 V
Contact Terminal Arrangement	Separate
Connections Terminals	lift terminals flexible lift terminals solid
Tightening Torque	< 0.8 N.m
Fixing Mode	By screw M3.5, M3.5 panel Clip-on 35 mm DIN rail
Shape of Screw Head	Combination roundhead
Product Weight	2.8 oz (79 g)
Width	1.4 in (36 mm)
Depth	2.2 in (57 mm)

Environment

Ambient Air Temperature for Storage	-40...221 °F (-40...105 °C)
Ambient Air Temperature for Operation	-40...131 °F (-40...55 °C)
IP Degree of Protection	IP20
Flame Retardance	UL94-V0

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Certifications	UL
	CSA
	CE

Ordering and shipping details

Category	US10CP221128
Discount Schedule	0CP2
GTIN	3606480278044
Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.90 in (4.826 cm)
Package 1 Width	1.50 in (3.81 cm)
Package 1 Length	3.80 in (9.652 cm)
Package 1 Weight	2.40 oz (68.04 g)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Connections and Schema

Connections and Wiring Diagrams

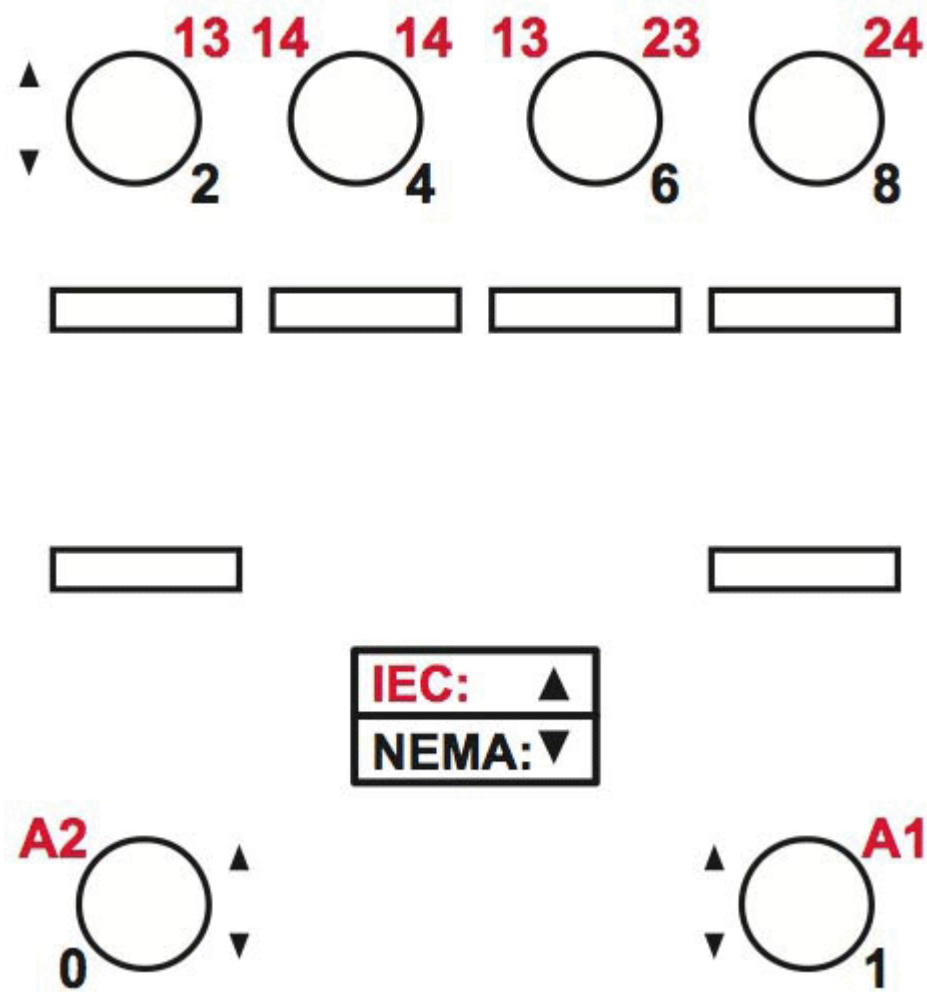

Connections and Wiring Diagrams

