






JDC (M12) Junction Blocks

4 Port, 4 Pin JDC Junction blocks



Field Wireable | Cable | D-Sub | IP67 Protection Rating




Trunk Style	UL Rating	Trunk Connection	Part Number		
			No LED	PNP	NPN
	UL Listed	Field Wireable 24 AWG - 16 AWG	JDC-440-007-F000	JDC-44P-207-F000	JDC-44N-207-F000
	UL Listed	Black PUR AWM With With Foil Shield 22 AWG Drain Wire 3 x 18 AWG 4 x 22 AWG 8.1mm OD	JDC-440-007-C**	JDC-44P-207-C**	JDC-44N-207-C**
	N/A	Gray PVC With With Foil Shield 20 AWG Drain Wire 5 x 24 AWG 4 x 20 AWG	JDC-440-009-D**	JDC-44P-209-D**	JDC-44N-209-D**

** Lengths in meters. Standard cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

JDC Junction Blocks

Q

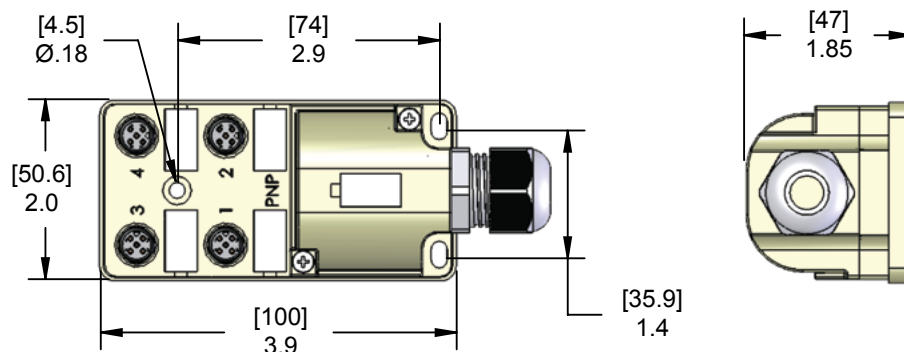

Specifications:

Ratings:

3 A per Connector

8 A per Block

Voltage:

Without LEDs: 0-150 Volt Max

With LEDs: 48 VDC Max in accordance with LED Configuration

Body:

Polypropylene

Inserts:

Polyamide

Port Coupling Nuts:

PBT

O-Ring:

BUNA-N

LED Lens:

Polycarbonate

Contacts:

Copper Alloy with Gold Plating

Marker Tags:

Polyamide (supplied on all units)