






JDC (M12) Junction Blocks

4 Port, 5 Pin JDC Junction blocks




Field Wireable | Cable | D-Sub | IP67 Protection Rating



Trunk Style	UL Rating	Trunk Connection	Part Number		
			No LED	PNP	NPN
	UL Listed	Field Wireable 24 AWG - 16 AWG	JDC-450-011-F000	JDC-45P-211-F000	JDC-45N-211-F000
	UL Listed	Black PUR AWM With Foil Shield 24 AWG Drain Wire 3 x 18 AWG 4 x 22 AWG 8.6mm OD	JDC-450-011-C**	JDC-45P-211-C**	JDC-45N-211-C**
	N/A	Gray PVC With Foil Shield 20 AWG Drain Wire 21 x 24 AWG 4 x 20 AWG	JDC-450-025-D**	JDC-45P-225-D**	JDC-45N-225-D**

** Lengths in meters. Standard cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

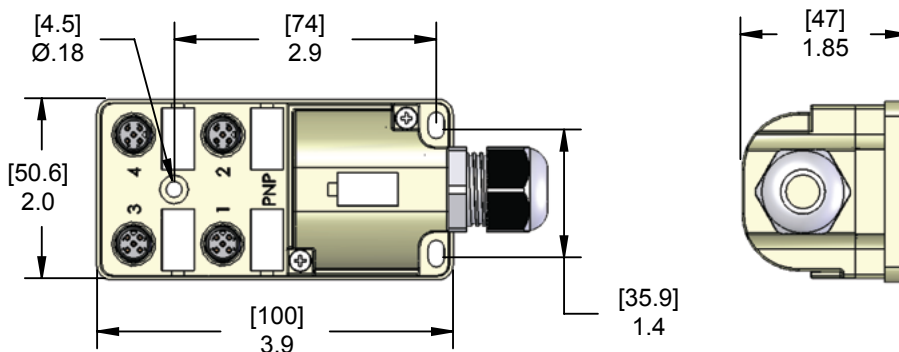

Specifications:

Ratings: 3 A per Connector
8 A per Block

Voltage: Without LEDs: 0-150 Volt Max
With LEDs: 48 VDC Max
in accordance with LED Configuration

Body: Polypropylene

Inserts: Polyamide

Port Coupling Nuts: PBT

O-Ring: BUNA-N

LED Lens: Polycarbonate

Contacts: Copper Alloy with Gold Plating

Marker Tags: Polyamide (supplied on all units)