



MIN Power Series Extension Cables

3, 4 & 7 Conductor MIN Power Series Extension Cables, 14/18AWG



Double Ended Cordsets | 600V, 18A | 600V, 15A | 600V, 12/1A or 9/5A | IP69 Rating



Only 3 & 4 Pole Cordsets are UL listed.



D

MIN Power Cordsets

Male Faceview	Part Number	Cables	Features	Color Code	Female Faceview
 7/8"-16UN2	MINH-3MFP-**	7/8" Size I Gray PVC ST00W 3 X 14 AWG 600V, 18A -40°C to +105°C 13.7mm OD	Industry Standard PVC	North American 1. Green/Yellow 2. Black 3. White	 7/8"-16UN2
 7/8"-16UN2	MINH-4MFP-**	7/8" Size I Gray PVC ST00W 4 X 14 AWG 600V, 15A -40°C to +105°C 14.9mm OD	Industry Standard PVC	North American 1. Black 2. White 3. Red 4. Green/Yellow	 7/8"-16UN2
 1"-16UN2	MINH-7MFPX-**	1" Size II Yellow PVC AWM 2 X 14 AWG 600V, 12A or 9A 5 X 18 AWG 600V, 1A or 5A -40°C to +105°C 12.1mm OD	Industry Standard PVC	North American 1. White/Black 2. Black*** 3. White*** 4. Red 5. Orange 6. Blue 7. Green/Yellow	 1"-16UN2


** Lengths in meters. Standard cable lengths are 1, 2, 5, 10 & 15 meters. Consult the factory for other lengths.

*** Black and White wires are 14 AWG.

Standard coupling nuts are nickel plated brass for 3 & 4 pin and anodized aluminum for 7 pin, for stainless coupling nut add a "SS" suffix.
(e.g. MINH-4MFP-3 becomes MINH-4MFP-3-SS)


For extension cables with right angle female ends, please consult the factory.

TPE jacket (TC-ER) is available for 3 & 4 pin upon request.



3 & 4 Conductors

Male (Male Threads) - Female (Female Threads)

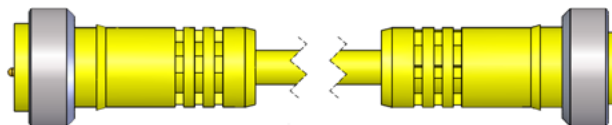

7 Conductors

Male (Female Threads) - Female (Female Threads)