
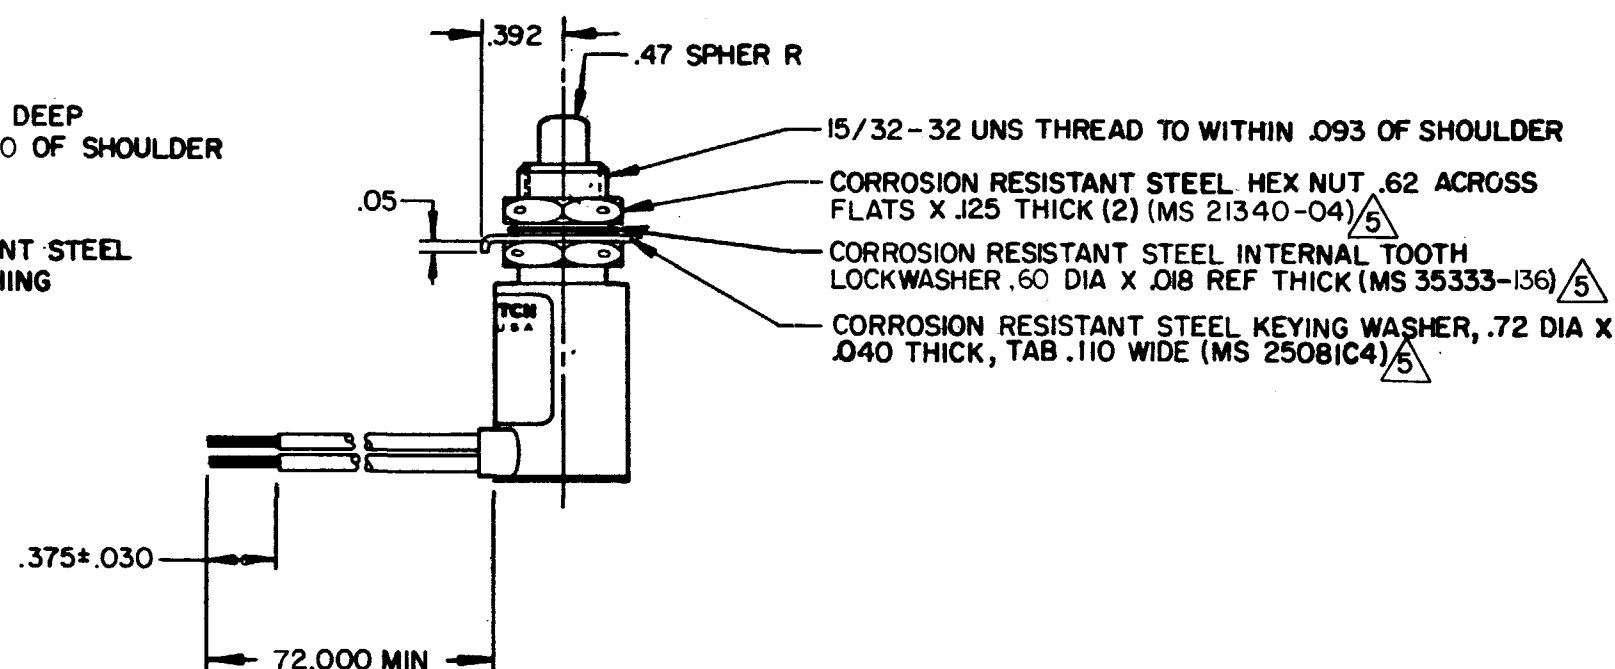
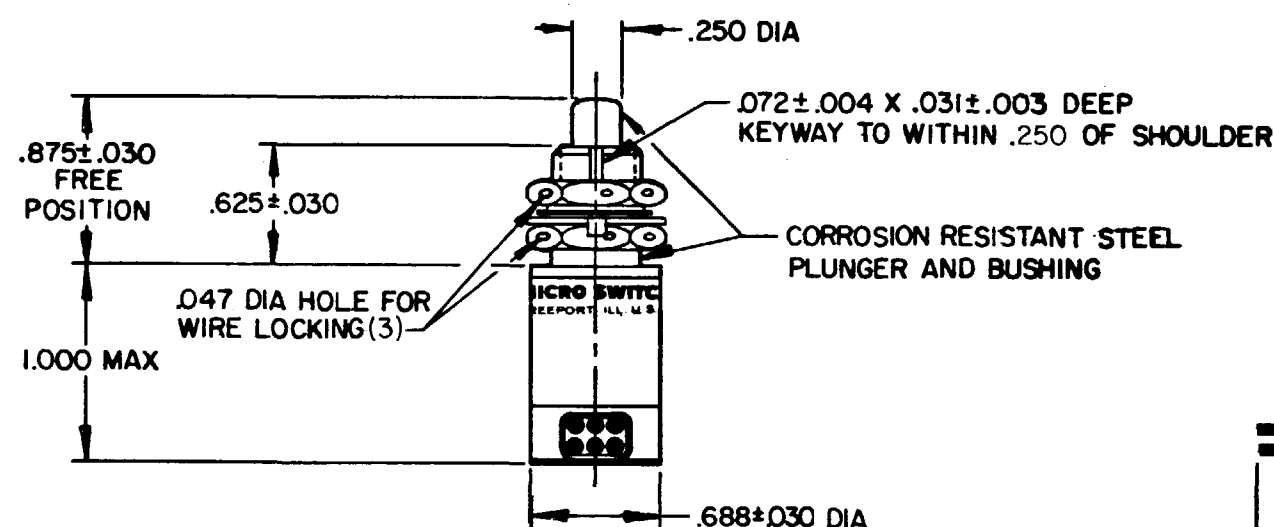
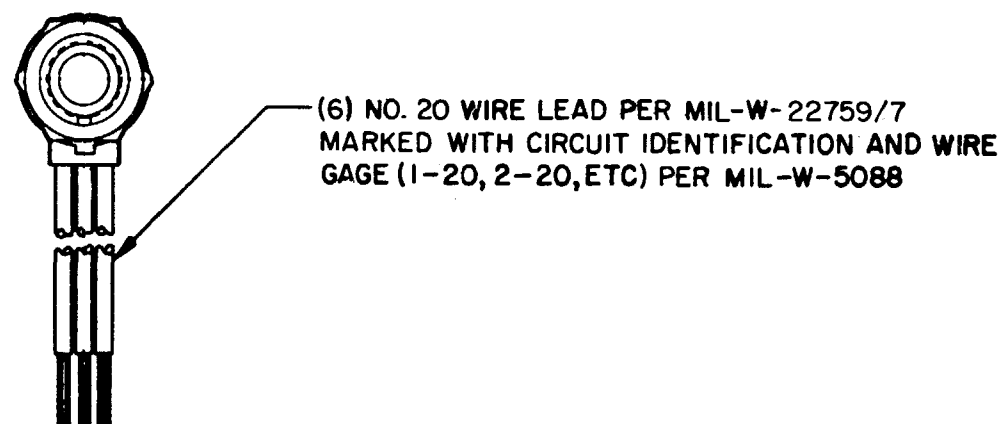




NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
- 2 - CIRCUIT DIAGRAM, DATE CODE, FED MFG CODE
AND CAT. LIST. ARE SHOWN ON NAMEPLATE
- 3 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
- 4 - COINCIDENCE OF OPERATING AND RELEASING POINTS:
.010 OF PLUNGER TRAVEL
- 5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY
OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT
TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

NO PLACES	DIM.	TOL.	DIM.	TOL.
ONE PLACE	X	1/64	X	0.010
TWO PLACES	X, X	0.001	X, X	0.001
THREE PLACES	X, X, X	0.0005	X, X, X	0.0005
ANGLES				

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

RAW MATERIAL - COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY
DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT 7.9 OZ MAX

CHARACTERISTICS

OPERATING FORCE	6-12 LB
FULL OVERTRAVEL FORCE	30 LB MAX
RELEASE FORCE	4 LB MIN
PRETRAVEL	.040 MAX
DIFFERENTIAL TRAVEL	.020 MAX
OVERTRAVEL	.125 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT SPDT (2)		
28 VDC		
LOAD	SEA LEVEL	50,000 FT.
RES	7	7
IND	4	2.5
MOTOR	4	

REVISIONS

A	CO46610	D J W	30 NOV 98
B	CO47573	J A P	7 AUG 80
C	CO49806 C	K A G	28 SEP 81
D	CO-55924	CO-	20 SEPT 84
E	CO57370	J A P	14 MAY 85
F	CO-75612-8	WES	16 AUG 93
G	CO-93765	P P F	30 NOV 98

602EN14-6
PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE
18

REPLACES

RELEASE NO. SR-11449

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

FO-32851-A

DRAWN

D J W

9 OCT 79