

DESCRIPTION: 970 SERIES D-SUB BACKSHELL

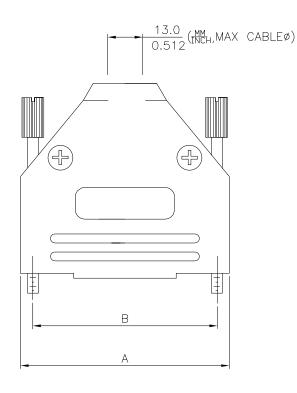



* UNLESS OTHERWISE SPECIFIED TOLERANCES ON DECIMAL IS:

DIMENSIONS(mm/in)												
	A		В		С		D					
	ММ	(±0.50)	MM	(±0.50)	MM	(±0.50)	MM	(±0.50)				
SIZE	INCH	(±0.02)	INCH	(±0.02)	INCH	(±0.02)	INCH	(±0.02)				
9	ММ	31.50	MM	24.99	MM	40.50	MM	15.00				
9	INCH	1.240	INCH	0.984	INCH	1.594	INCH	0.591				
	MM	40.00	MM	33.32	MM	40.50	MM	15.00				
15	INCH	1.575	INCH	1.312	INCH	1.594	INCH	0.591				
25	MM	54.00	MM	47.04	MM	49.50	MM	15.00				
20	INCH	2.126	INCH	1.852	INCH	1.949	INCH	0.591				
7.7	MM	70.50	MM	63.50	MM	54.50	MM	16.00				
37	INCH	2.776	INCH	2.500	INCH	2.146	INCH	0.630				

ROHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
PAM JENKINS

DATE:
06/09/2005

PLASTIC: ABS UL 94-HB RATED

PLATING: NICKEL PLATED

JACKSCREWS: STEEL-ZINC PLATED

M3 HOODSCREWS: STEEL-ZINC PLATED

COMPRESSION INSERTS: ABS UL 94-HB RATED

M3 NUTS: STEEL-ZINC PLATED

OPERATING TEMP: -30°C TO +90°C

BACKSHELL KIT INCLUDES:

(2)BACKSHELL HALVES

(2)4-40 THUMBSCREWS


(2)HOUSING SCREWS & (2)NUTS

(1)SET OF COMPRESSION INSERTS—VARIOUS SIZES

DIAMETERS:4mm(.157"),5mm(.197"),7mm(.276"),9mm(.351")

NOTE: 37 POSITION HAS (4) HOUSING SCREWS & (4) NUTS


**NOTE: 3 in-lbs IS RECOMMEND TORQUE FOR HOUSING SCREWS



UNITS = "as specified" DO NOT SCALE FROM DRAWING

NorComp
norcomp

DWG NO.	970-YYY-020R121				
NTS	1		2	16	
SCALE:	SHEET	OF		RE\	

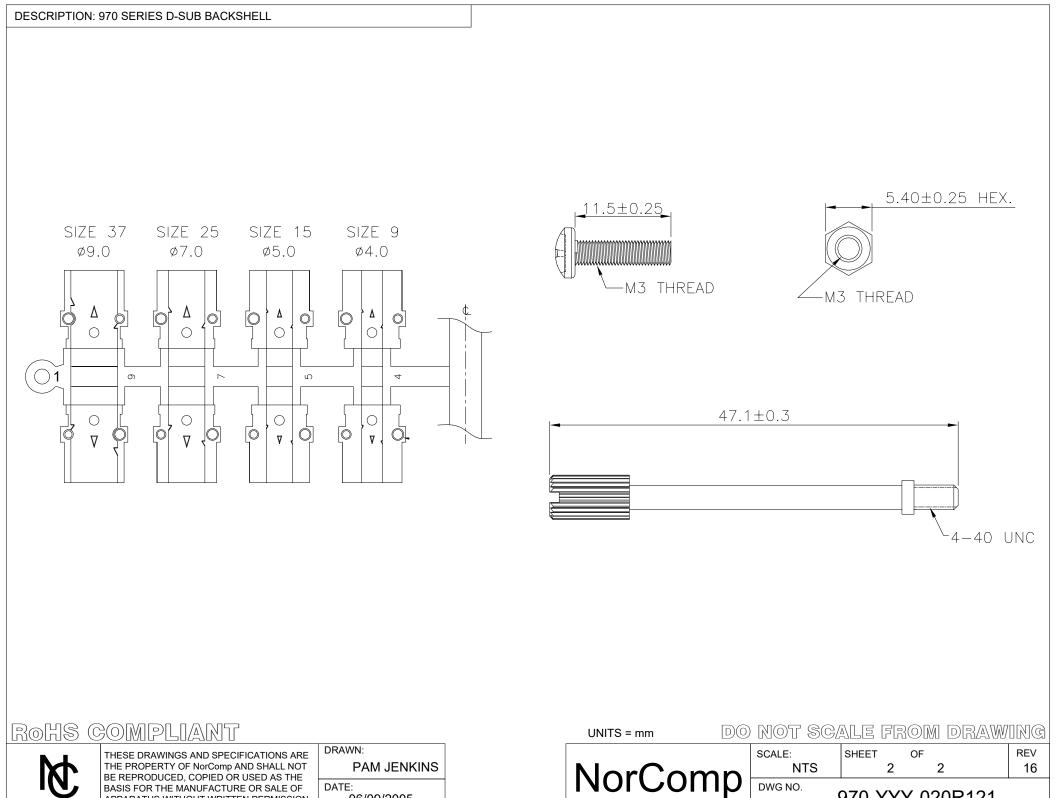

06/09/2005

970-YYY-020R121