

SPECIFICATIONS:

MATERIALS:

BACKSHELL:	DIE CAST NICKEL PLATED ZINC ALLOY
JACKSCREWS:	ZINC PLATED STEEL
HOOD SCREWS:	ZINC PLATED STEEL
COMPRESSION INSERTS:	ABS, UL 94-HB

ENVIRONMENT:

OPERATING TEMPERATURE: -40°C TO +120°C

BACKSHELL KIT INCLUDES:

(2) BACKSHELL HALVES



(2) 4-40 THUMBSCREWS

(2) HOUSING SCREWS (RECOMMENDED TORQUE 5.2 IN-LBS)

(1) COMPRESSION INSERTS - VARIOUS SIZES (9 POSITION-37 POSITION)
Ø0.157 [4.0], Ø0.197 [5.0], Ø0.276 [7.0], Ø0.351 [9.0]

(1) COMPRESSION INSERTS - VARIOUS SIZES (50 POSITION)
Ø0.433 [11.0], Ø0.492 [12.5], Ø0.551 [14.0], Ø0.591 [15.0]

NOTE: 9 POSITION HAS ONLY 1 THUMBSCREW (OPPOSITE CABLE ENTRY)
NOTE: 50 POSITION HAS 1 METAL CLAMP AND 2 CLAMP SCREWS

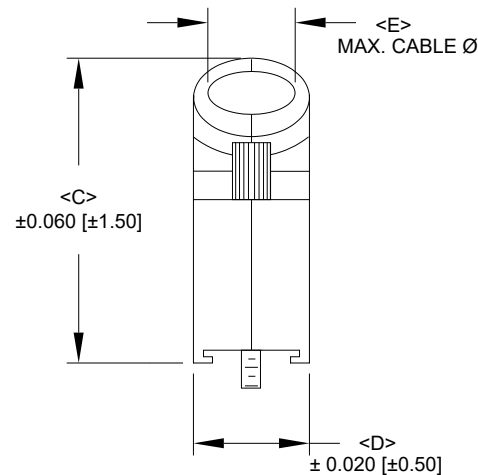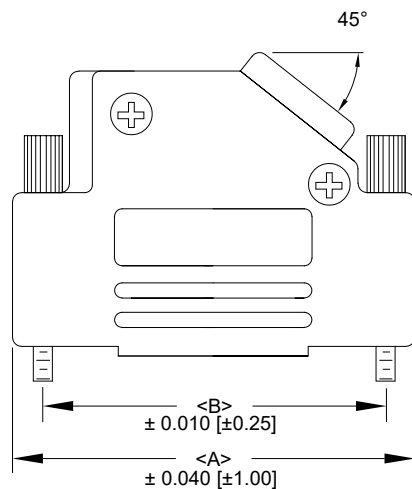

DIMENSIONS(in/mm)					
SIZE	A	B	C	D	E
9	1.220	0.984	1.429	0.570	0.510
	30.99	24.99	36.30	14.48	13.00
15	1.556	1.312	1.587	0.570	0.510
	39.50	33.32	40.30	14.48	13.00
25	2.094	1.852	1.587	0.570	0.510
	53.20	47.04	40.30	14.48	13.00
37	2.744	2.500	1.587	0.570	0.510
	69.70	63.50	40.30	14.48	13.00
50	2.650	2.406	1.770	0.690	0.670
	67.40	61.11	44.90	17.40	17.00

971-YYY-030R121

SERIES _____

POSITIONS _____

009

015

025

037

050

MATERIAL _____

030 = ZINC

COLOR: _____

12 = NICKEL OVER COPPER

PUT-UPS _____

1 = KIT

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
P. JENKINS

DATE:
06/10/2005

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTS

SHEET OF
1 1

REV
11

DWG NO.

971-YYY-030R121