

ALL TOLERANCES = ±0.3 UNLESS OTHERWISE INDICATED DESIGNED TO ACCOMMODATE STANDARD: D-SUB - Shell Size 4

BACKSHELL KIT INCLUDES:

- 2 BACKSHELL HALVES
- 2 MATING SCREWS (#4-40, RECOMMENDED TORQUE 60 in-oz)
- 2 SADDLE WASHERS
- 2 HOUSING SCREWS (#4-40, RECOMMENDED TORQUE 5.2 in-lbs)
- 2 HOUSING NUTS (#4-40, RECOMMENDED TORQUE 5.2 in-lbs)
- 1 GROMMET TREE VARIOUS SIZES (NON-CONDUCTIVE GROMMETS)

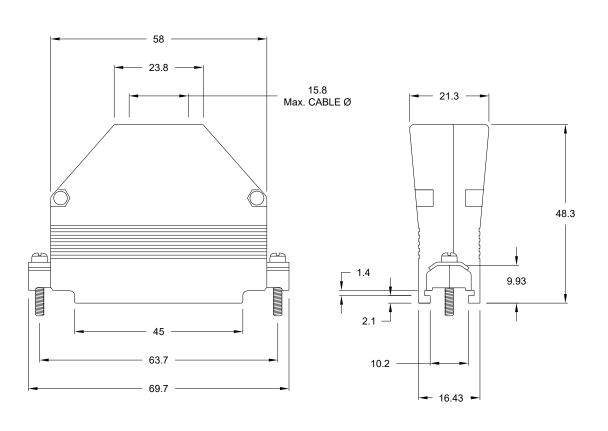

MATERIAL: DIE-CAST ZINC ALLOY PLATING: NICKEL (5u" MIN PLATING THICKNESS) OPERATING TEMPERATURE: -45°C TO +120°C



ROHS COMPLIANT

例

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NOTComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH

DATE:

4/20/2010

UNITS = mm


DO NOT SCALE FROM DRAWING


REV

7



WG NO.	979-037	7 0000	404
NTS	1	2	
CALE:	SHEET	OF	

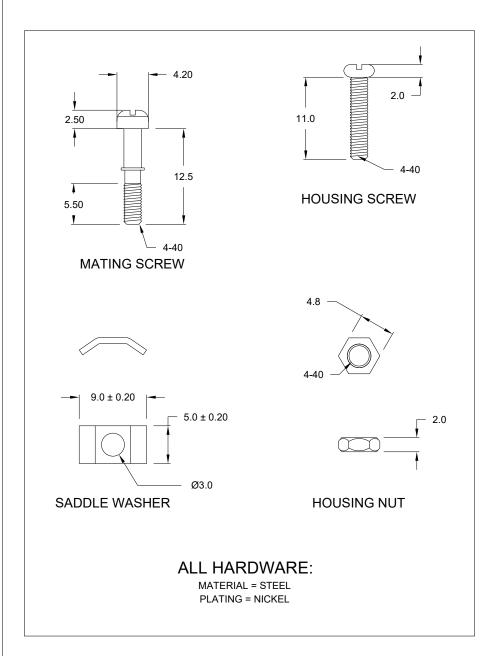

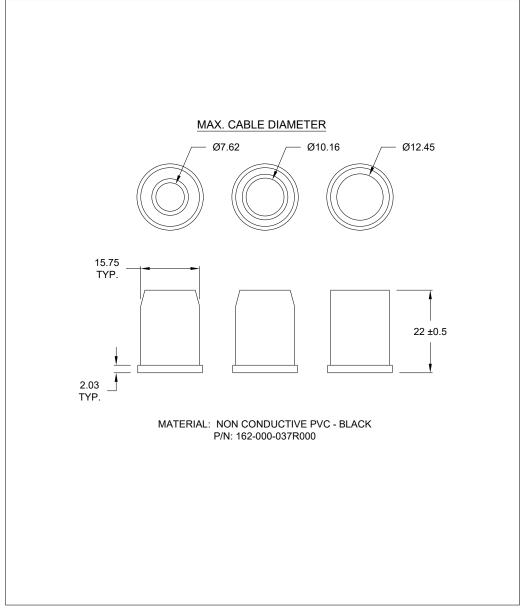

Rohs Compliant



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF ADDAPATIS WITHOUT WRITTEN PERMISSION.

DRAWN:

C. SMITH

DATE: 4/20/2010

UNITS = mm

DO NOT SCALE FROM DRAWING



SCALE: SHEET OF REV 7

DWG NO. 979-037-030R121