ALL TOLERANCES = ±0.3 UNLESS OTHERWISE INDICATED DESIGNED TO ACCOMMODATE STANDARD: D-SUB - Shell Size 5


## 18.1 Max. CABLE Ø 23.1 48.25 42.8 42.8 41.05 9.78

## **BACKSHELL KIT INCLUDES:**

- 2 BACKSHELL HALVES
- 2 THUMBSCREWS (#4-40)
- 2 SADDLE WASHERS
- 2 HOUSING SCREWS (#4-40, RECOMMENDED TORQUE 5.2 in-lbs)
- 2 HOUSING NUTS (#4-40, RECOMMENDED TORQUE 5.2 in-lbs)
- 2 MATING SCREWS (#4-40, RECOMMENDED TORQUE 60 in-oz)
- 1 GROMMET TREE VARIOUS SIZES (NON-CONDUCTIVE GROMMETS)

MATERIAL: DIE-CAST ZINC ALLOY

PLATING: NICKEL (5u" MIN PLATING THICKNESS)
OPERATING TEMPERATURE: -45°C TO +120°C



RoHS COMPLIANT

例

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NOrComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH

DATE: 4/20/2010 UNITS = mm

DO NOT SCALE FROM DRAWING




SCALE: SHEET NTS 1


DWG NO.


979-050-030R121

REV

8

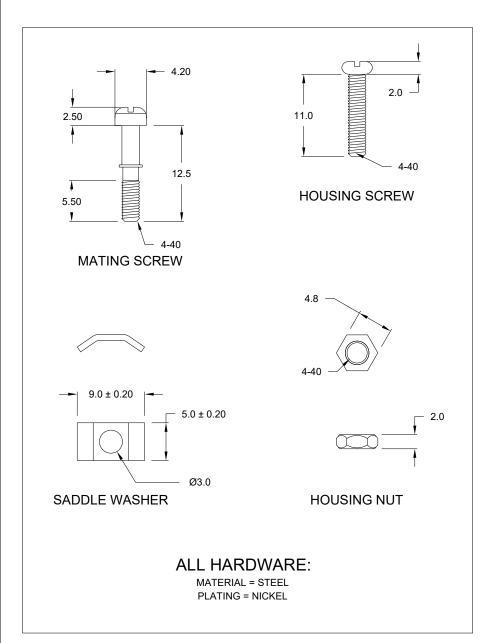

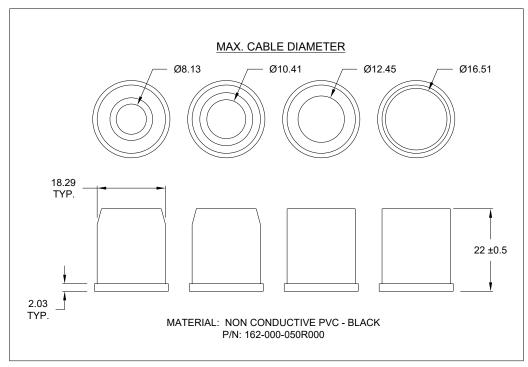

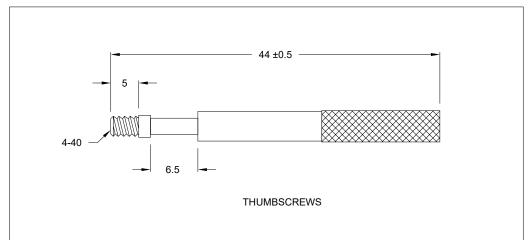

## ROHS COMPLIANT

风

THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NorComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OR SALE OF
ADDADATIS WITHOUT WRITTEN DEPMISSION

DRAWN:

C. SMITH

DATE: 4/20/2010

UNITS = mm

DO NOT SCALE FROM DRAWING

REV

8

NorComp

SCALE: SHEET OF 2 2

DWG NO. 979-050-030R121