


BACK SHELL KIT INCLUDES:

- 2 - BACK SHELL HALVES
- 3 - HOUSING SCREWS (#4-40, RECOMMENDED TORQUE 5.2 in-lbs)
- 1 - GROMMET TREE - VARIOUS SIZES  
(NON-CONDUCTIVE GROMMETS)  
P/N = 162-000-925R000

| DIMENSIONS(in) |                     |                                |                                |
|----------------|---------------------|--------------------------------|--------------------------------|
| SIZE           | A <sup>±0.010</sup> | B <sup>+0.031<br/>-0.015</sup> | C <sup>+0.026<br/>-0.034</sup> |
| 9              | 0.984               | 1.240                          | 1.850                          |
| 15             | 1.312               | 1.555                          | 2.323                          |
| 25             | 1.852               | 2.106                          | 2.835                          |

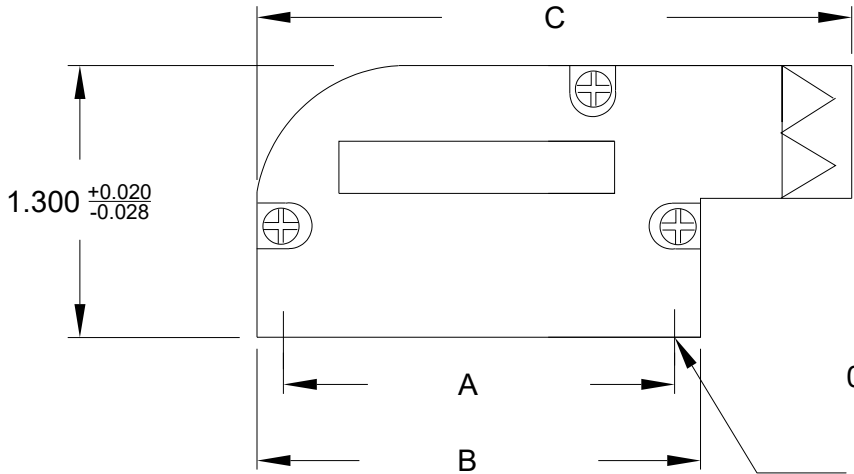

GROMMET TREE SIZES INSIDE Ø  
(162-000-925R000)

- 0.185"
- 0.248"
- 0.290"
- 0.324"

MAX CABLE Ø WITHOUT GROMMETS  
0.417" REF (RECOMMENDED TO SAMPLE TEST)

981-YYY-030R121

SERIES  
POSITIONS  
009  
015  
025  
MATERIAL  
030 = ZINC  
COLOR  
12 = NICKEL OVER COPPER  
PUT-UPS  
1 = KIT

MATERIAL: DIE-CAST ZINC ALLOY, NICKEL PLATED  
OPERATING TEMPERATURE: -45°C TO +120°C

(2x) #4-40 INTERNAL THREADS  
THREAD DEPTH 0.394 INCHES REF

ADDITIONAL HARDWARE IS INTENDED TO  
BE USED TO ATTACH CONNECTOR TO BACK  
SHELL. NORCOMP INTENDS THIS PRODUCT  
TO BE USED WITH NORCOMPS SLIDE LOCK  
HARDWARE WHICH IS PRESENTED ON THE  
981 SERIES PAGE OF NORCOMPS WEBSITE.

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE  
THE PROPERTY OF NorComp AND SHALL NOT  
BE REPRODUCED, COPIED OR USED AS THE  
BASIS FOR THE MANUFACTURE OR SALE OF  
APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
P. JENKINS

DATE:  
07/28/2005

UNITS = inch

DO NOT SCALE FROM DRAWING

NorComp

SCALE:  
NTS

SHEET OF  
1 1

REV  
8

DWG NO. 981-YYY-030R121