

Product Specification

NHD-C0220BA-FSW-FTW

Chip-On-Glass (COG) Liquid Crystal Display

NHD-	Newhaven Display
C0220-	COG, 2 Lines x 20 Characters
BA-	Model
F-	Transflective
SW-	Side White LED Backlight
F-	FSTN Positive
T-	12:00 Optimum View
W-	Wide Temperature

Table of Contents

Document Revision History.....	2
Mechanical Drawing	3
Interface Selection.....	5
Wiring Diagram	5
Electrical Characteristics	6
Optical Characteristics	6
Controller Information:.....	6
DDRAM Address	6
Table of Commands.....	7
Timing Characteristics.....	8
Built-In Font Table	11
Example Initialization Program	12
Quality Information.....	13

Additional Resources

- **Support Forum:** <https://support.newhavendisplay.com/hc/en-us/community/topics>
- **GitHub:** <https://github.com/newhavendisplay>
- **Example Code:** <https://support.newhavendisplay.com/hc/en-us/categories/4409527834135-Example-Code/>
- **Knowledge Center:** https://www.newhavendisplay.com/knowledge_center.html
- **Quality Center:** https://www.newhavendisplay.com/quality_center.html
- **Precautions for using LCDs/LCMs:** <https://www.newhavendisplay.com/specs/precautions.pdf>
- **Warranty / Terms & Conditions:** <https://www.newhavendisplay.com/terms.html>









Document Revision History

Revision	Date	Description	Changed By
0	03/24/2021	Initial Release	AS
1	07/05/2022	Corrected Typo in Functions and Features	TM
2	03/07/2024	Date Code Format Updated on Mechanical Drawing	KL
3	11/27/2024	Corrected Pin 15 in Pin Description	KL
4	01/07/2025	SPI Interface added Part Revision changed to Rev1B	KL
5	06/23/2025	Updated Pin Description	KL

Mechanical Drawing

VIEWING DIRECTION
↓

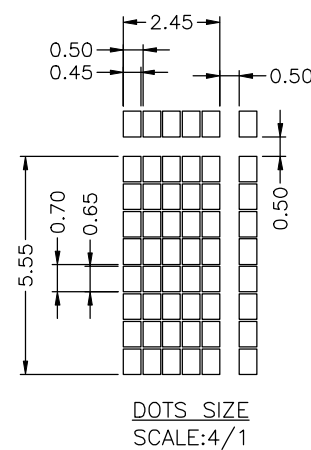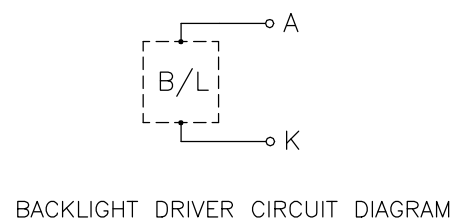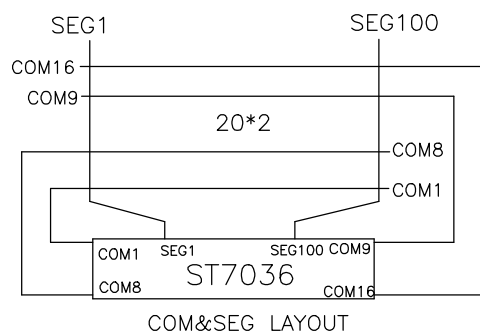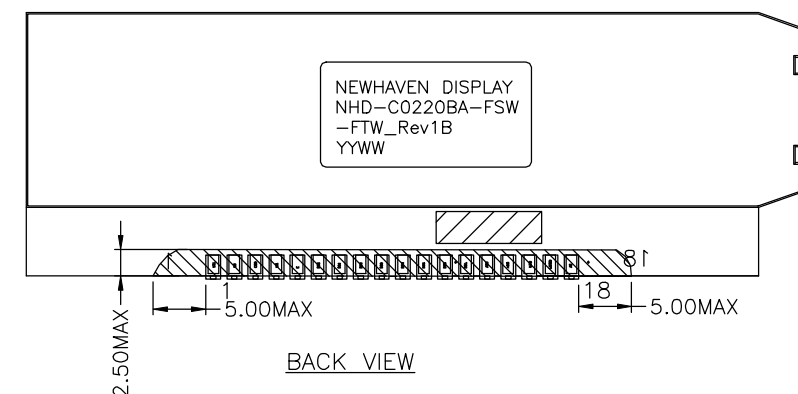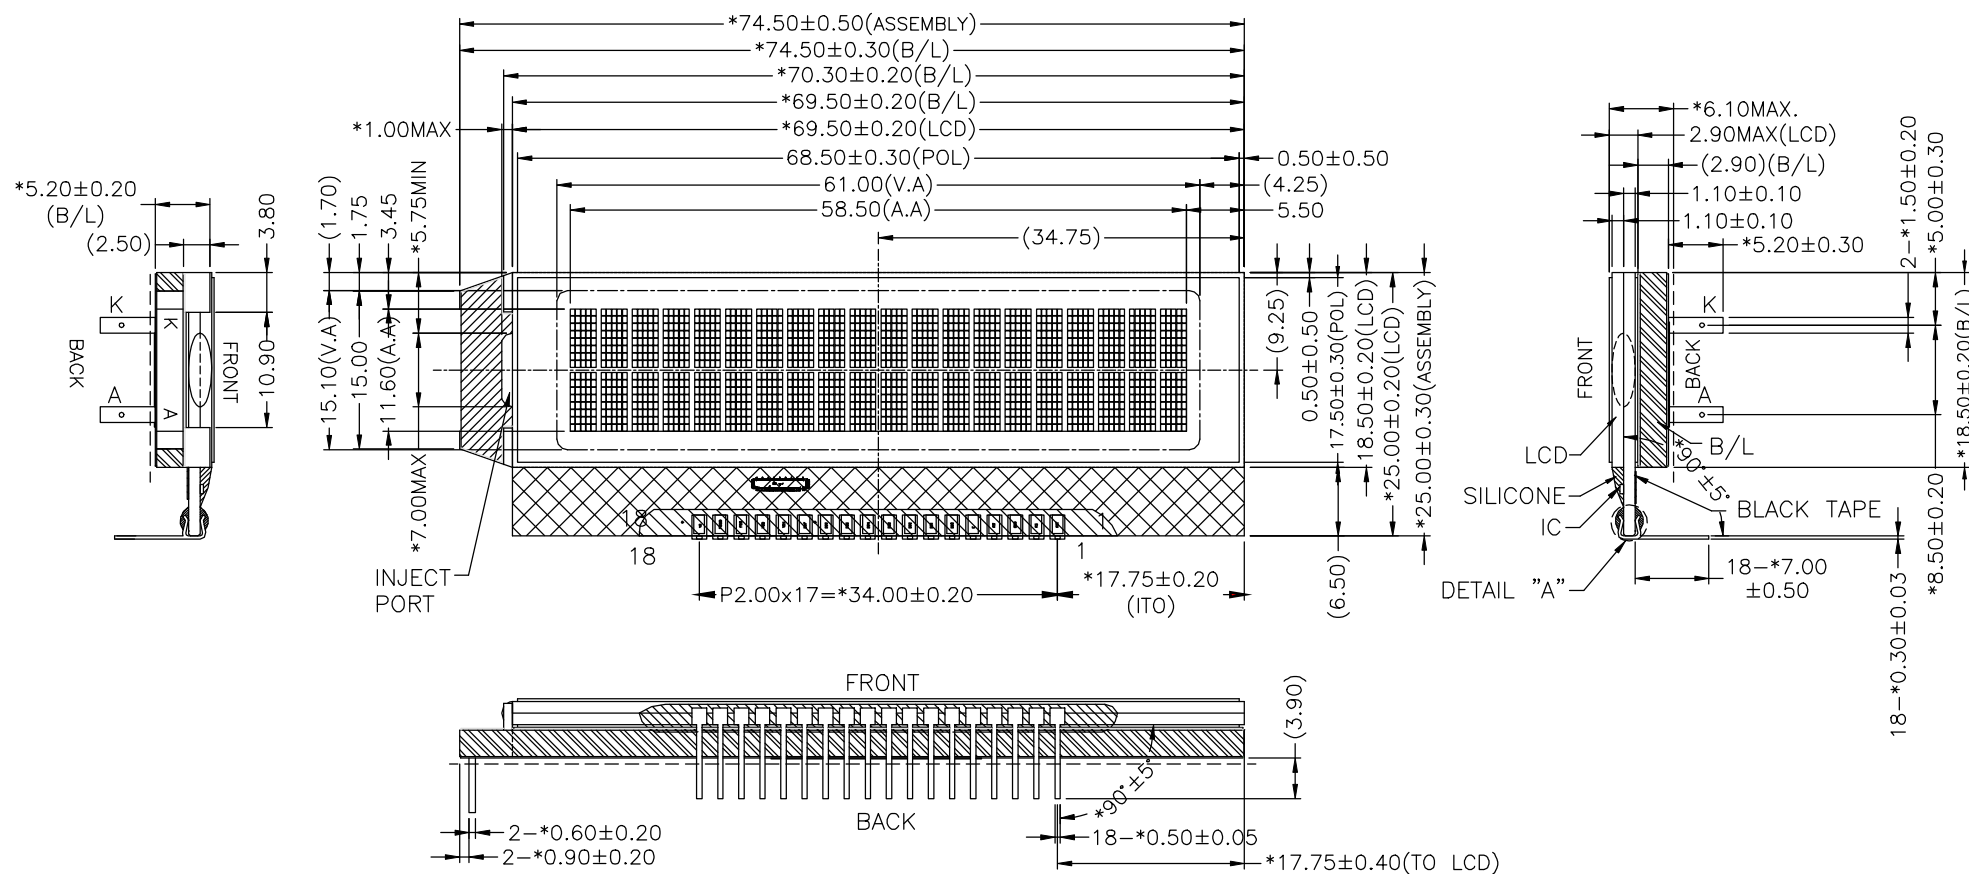


PIN INTERFACE:

PIN	1	2	3	4	5	6	7	8	9
CONNECTION	RST	RS	CSB	RW	E	DB0	DB1	DB2	DB3
PIN	10	11	12	13	14	15	16	17	18
CONNECTION	DB4	DB5	DB6	DB7	VSS	VDD	PSB	PSI2B	V0

Product Description 2x20 Character LCD

1. Driver IC: ST7036
2. Driving Mode: 1/16 Duty, 1/5 Bias
3. Interface: 4/8-bit 6800 Parallel, SPI
4. Power Requirement: 5.0V LCD, 3.0V/30mA Backlight
5. Optical Features: FSTN (+), Transflective, 12:00 View, White Backlight

Standard Tolerance: (Unless otherwise specified) Linear: ±0.3mm	 NEWHAVEN DISPLAY INTERNATIONAL	
	Drawing/Part Number: NHD-C0220BA-FSW-FTW	Revision: 1B
Unless otherwise specified: • Dimensions are in Millimeters • Third Angle Projection	Drawn By: K. Lewis Drawn Date: 06/23/2025	Approved By: K. Lewis Approved Date: 06/23/2025
	This drawing is solely the property of Newhaven Display International, Inc. The information it contains is not to be disclosed, reproduced or copied in whole or part without written approval from Newhaven Display.	

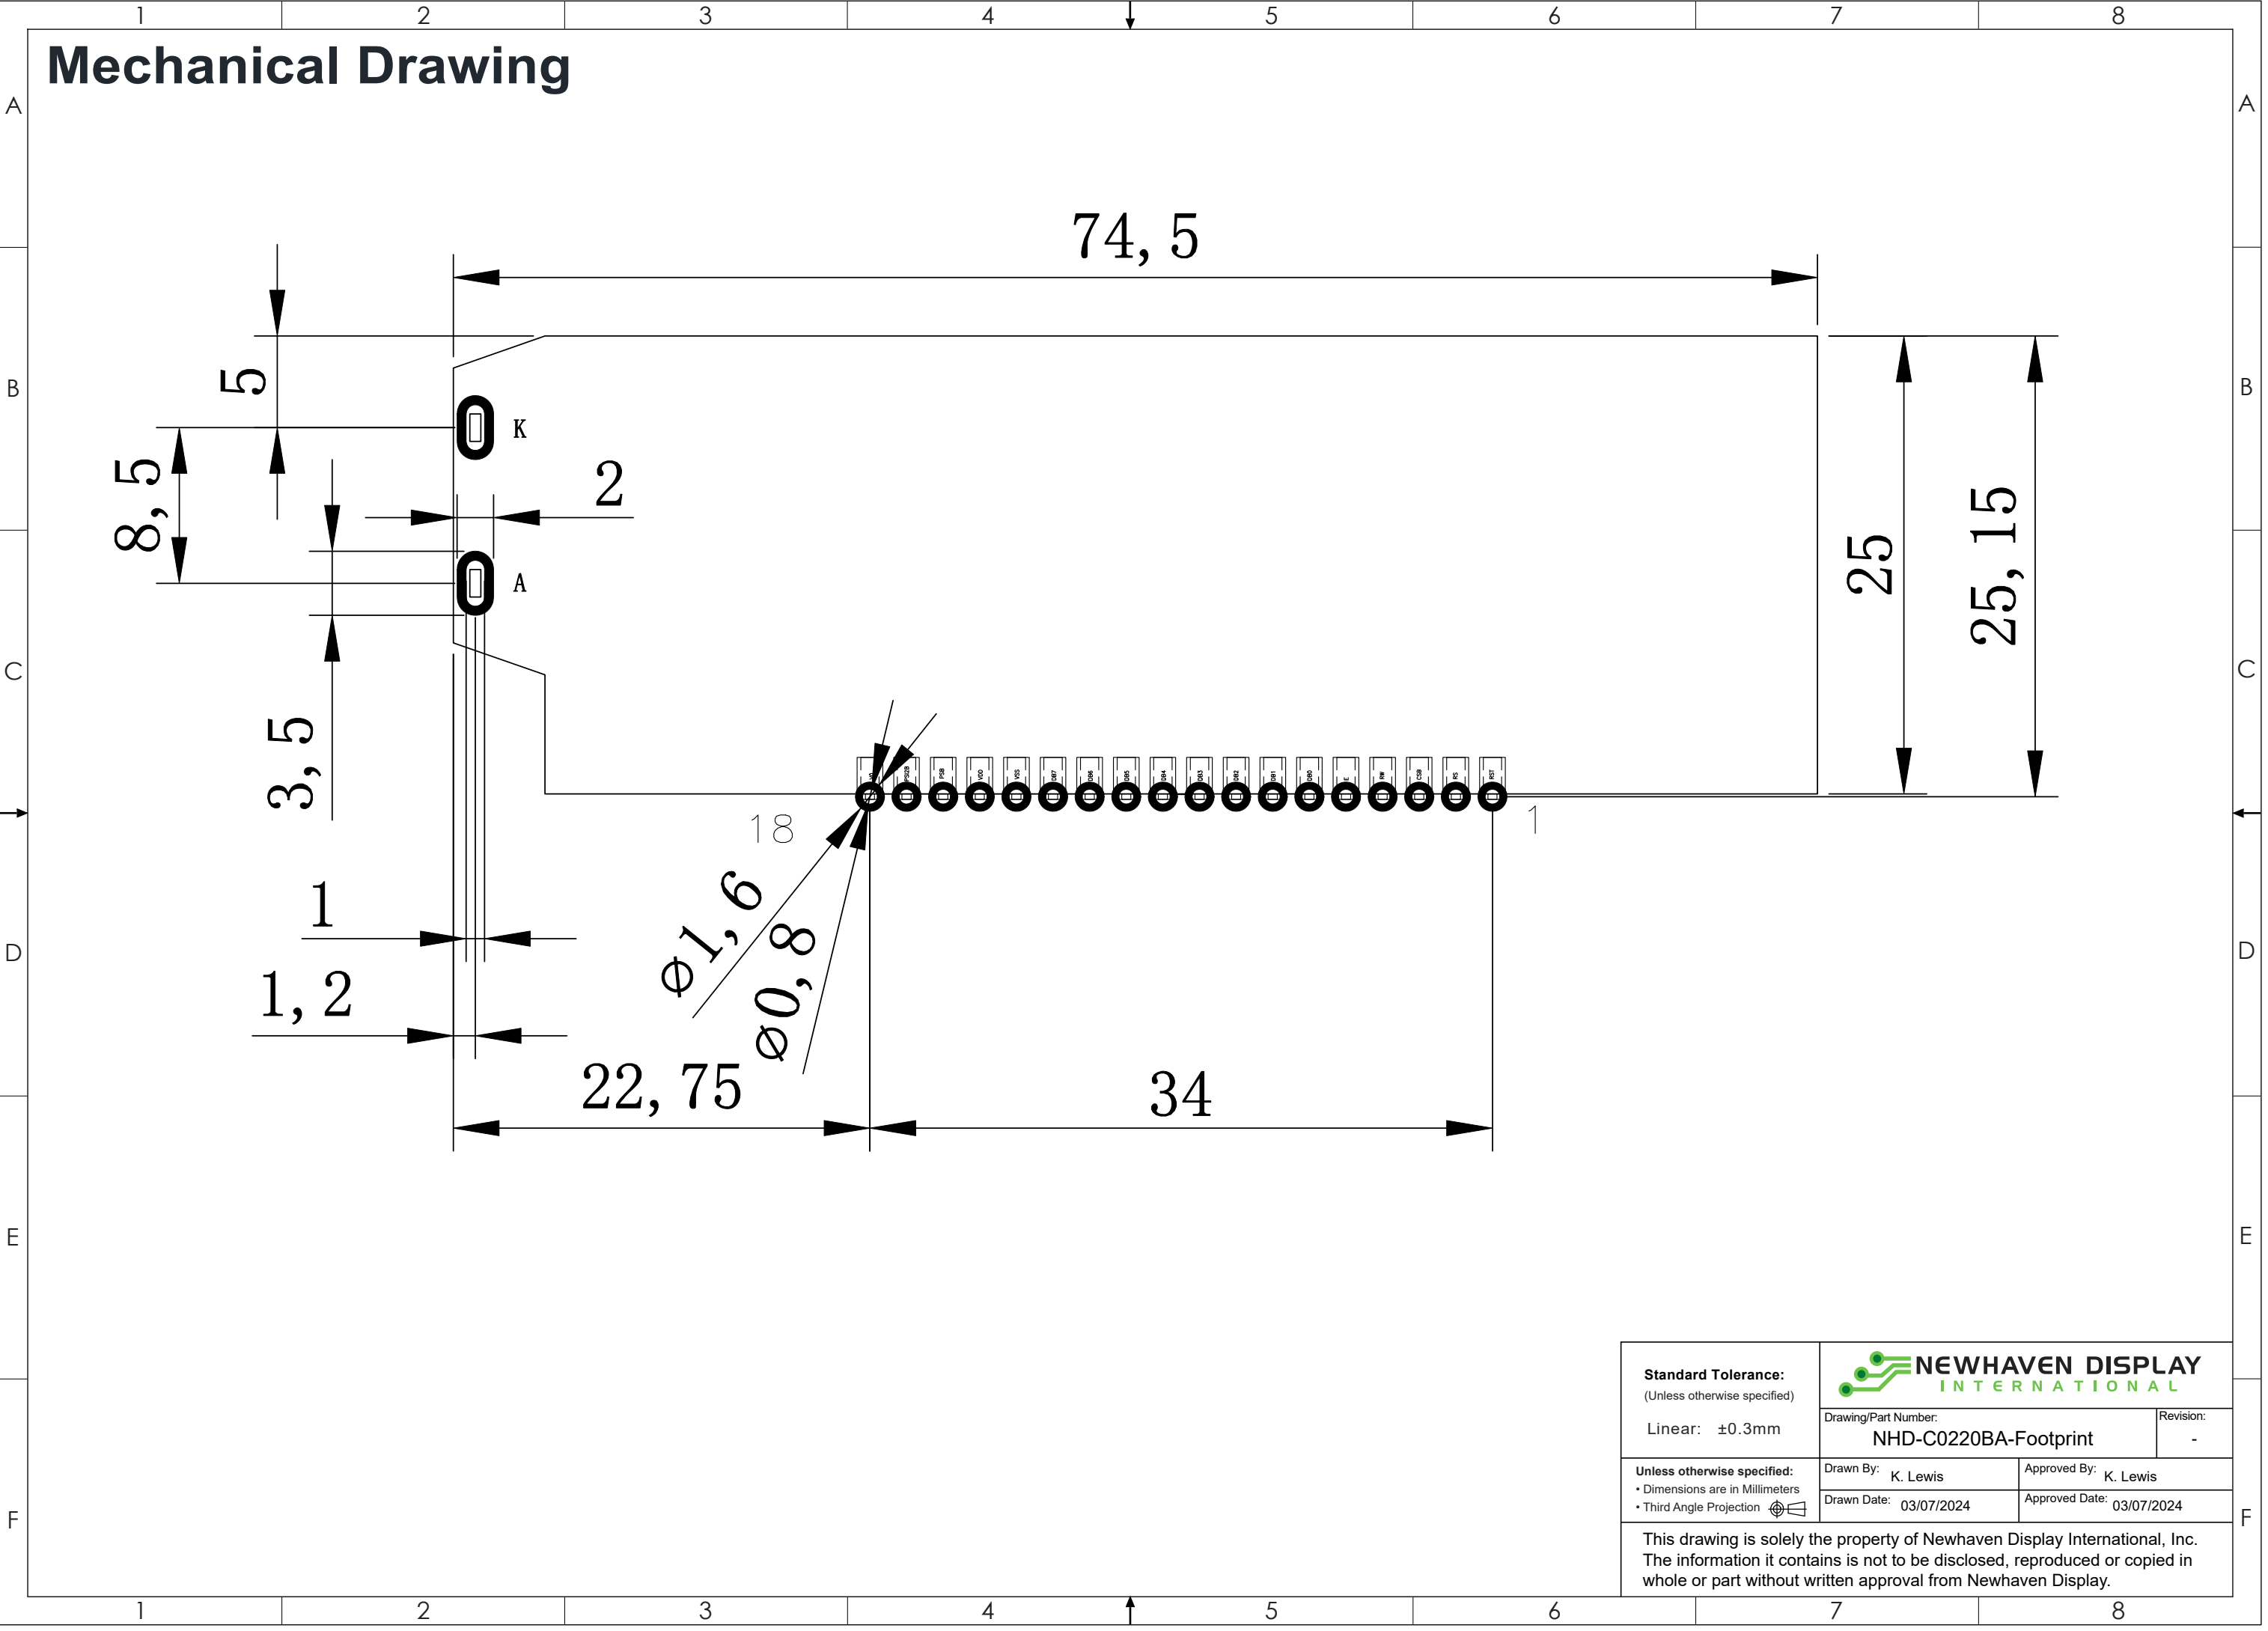

Standard Tolerance: (Unless otherwise specified) Linear: ±0.3mm	 NEWHAVEN DISPLAY INTERNATIONAL	
	Drawing/Part Number: NHD-C0220BA-Footprint	Revision: -
Unless otherwise specified: • Dimensions are in Millimeters • Third Angle Projection 	Drawn By: K. Lewis	Approved By: K. Lewis
	Drawn Date: 03/07/2024	Approved Date: 03/07/2024
This drawing is solely the property of Newhaven Display International, Inc. The information it contains is not to be disclosed, reproduced or copied in whole or part without written approval from Newhaven Display.		

Pin Description

Pin No.	Symbol	External Connection	Function Description
1	/RST	MPU	Active LOW Reset signal
2	RS	MPU	Register Select: 0=Instruction, 1=Data
3	CSB	MPU	Active LOW Chip select
4	R/W	MPU	Read / Write select: 0=Write, 1=Read
5	E	MPU	Parallel Interface: Operation Enable Signal Serial Interface: Connect to VDD
6-9	DB0 – DB3	MPU	Parallel Interface: Four low order bi-directional three-state data bus lines. These four are not used during 4-bit operation.
10-13	DB4 – DB7	MPU	Parallel Interface: Four high order bi-directional three-state data bus lines. Serial Interface: DB6 – Serial Clock DB7 – Serial Input Data
14	Vss	Power Supply	Ground
15	VDD	Power Supply	Supply Voltage for LCD and Logic (5.0V)
16	PSB	MPU	Interface select signal
17	PSI2B	MPU	Interface select signal
18	V0	Adj. Power Supply	Variable Supply Voltage for Contrast (approx. 4.4V)
A	LED +	Power Supply	Backlight Anode (30 mA @ 3V)
K	LED -	Power Supply	Backlight Cathode (Ground)

Recommended LCD connector: 2.0mm Pitch 18pins Soldered to PCB


Backlight connector: A and K Pins

Mates With: PCB Thru-Hole

Interface Selection

Pin Name	Parallel	4-wire SPI
PSB	1	0
PSI2B	1	1

Wiring Diagram

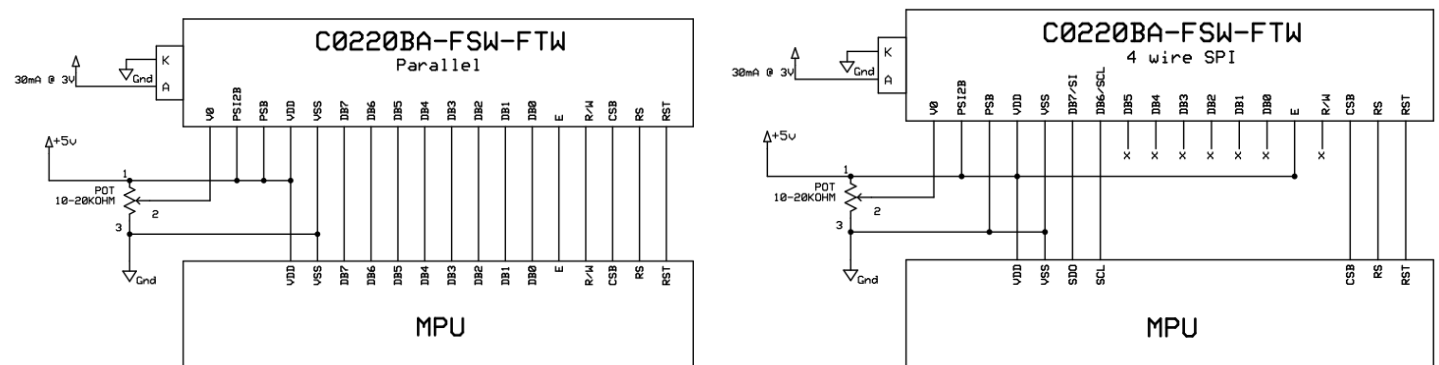

Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Temperature Range	T _{OP}	Absolute Max	-20	25	+70	°C
Storage Temperature Range	T _{ST}	Absolute Max	-30	25	+80	°C
Supply Voltage	V _{DD}	-	4.5	5.0	5.5	V
Supply Current	I _{DD}	V _{DD} = 5.0V	0.05	0.4	2.5	mA
Supply for LCD (Contrast)	V _{LCD}	T _{OP} = 25°C	4.2	4.4	4.6	V
"H" Level input	V _{IH}	-	0.7 * V _{DD}	-	V _{DD}	V
"L" Level input	V _{IL}	-	-0.3	-	0.8	V
"H" Level output	V _{OH}	-	0.7 * V _{DD}	-	V _{DD}	V
"L" Level output	V _{OL}	-	V _{SS}	-	0.8	V
Backlight Supply Current	V _{LED}	-	-	30	36	mA
Backlight Supply Voltage*	I _{LED}	I _{LED} = 30 mA	2.9	3.0	3.2	V

*The LED of the backlight is driven by current drain; drive voltage is for reference only. Drive voltage must be selected to ensure backlight current drain is below MAX level stated.

Optical Characteristics

Controller Information:

Built-in ST7036 Controller: <https://support.newhavendisplay.com/hc/en-us/articles/4414860535575-ST7036>

DDRAM Address

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	10	11	12	13
40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F	50	51	52	53


Table of Commands

Instruction	Instruction Code										Description	Execution Time
	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0		
Clear Display	0	0	0	0	0	0	0	0	0	1	Clears entire display. Does not change DDRAM address.	0.76ms
Return Home	0	0	0	0	0	0	0	0	1	X	Sets DDRAM Address to 0x00. Returns shifted display to original position.	0.76ms
Entry Mode Set	0	0	0	0	0	0	0	1	I/D	S	Sets cursor to auto Increment or Decrement, and sets display shift.	18.5us
Display ON/OFF control	0	0	0	0	0	0	1	D	C	B	Sets Display (D) ON/OFF. Sets Cursor (C) ON/OFF. Sets Blinking (B) of cursor ON/OFF.	18.5us
Cursor/ Display Shift	0	0	0	0	0	1	S/C	R/L	X	X	Moves cursor & shifts display without changing DDRAM contents.	18.5us
Function Set	0	0	0	0	1	DL	N	X	X	X	Set interface data length. DL = 8/4-bit Interface N = 2/1 Line Mode	18.5us
Set CGRAM address	0	0	0	1	ACG5	ACG4	ACG3	ACG2	ACG1	ACG0	Move to CGRAM address.	18.5us
Set DDRAM address	0	0	1	ADD6	ADD5	ADD4	ADD3	ADD2	ADD1	ADD0	Move to DDRAM address.	18.5us
Read Busy Flag & Address	0	1	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Read Busy Flag (BF) and Address Counter.	-
Write data to CGRAM or DDRAM	1	0	Write Data								Write data to CGRAM or DDRAM	18.5us
Read data from CGRAM or DDRAM	1	1	Read Data								Read data from CGRAM or DDRAM	18.5us

Timing Characteristics

6800 Parallel Interface


Write from MPU to ST7036

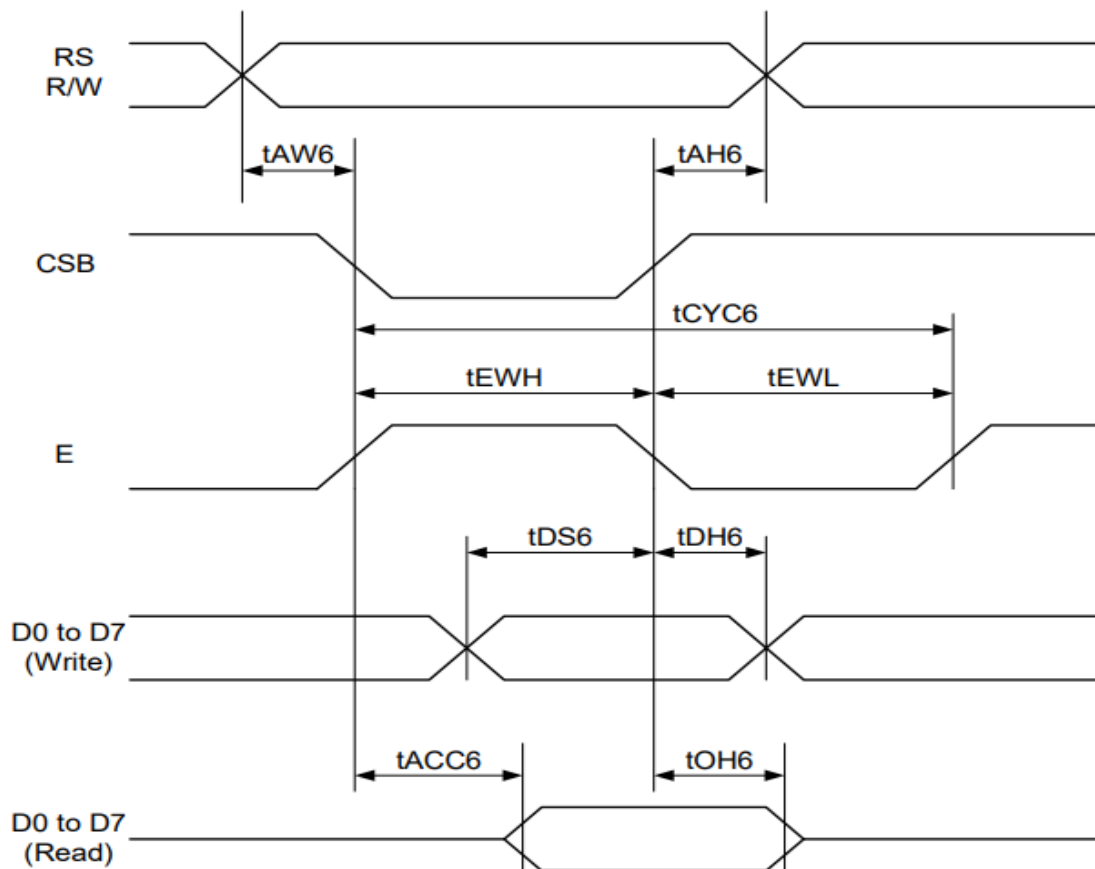

Item	Signal	Symbol	Condition	VDD=2.7 to 4.5V Rating		VDD=4.5 to 5.5V Rating		Units
				Min.	Max.	Min.	Max.	
Address hold time	RS	tAH6	—	20	-	20	-	ns
Address setup time	RS	tAW6		20	-	20	-	
System cycle time	RS	tCYC6	—	400	-	280	-	ns
Data setup time	D0 to D7	tDS6	—	100	-	80	-	ns
Data hold time	D0 to D7	tDH6		40	-	20	-	
Access time	D0 to D7	tACC6	CL = 100 pF	-	500	-	400	ns
Output disable time	D0 to D7	tOH6		300	-	150	-	
Enable H pulse time	E	tEWH	—	200	-	120	-	ns
Enable L pulse time	E	tEWL	—	150	-	130	-	ns



Read from MPU to ST7036

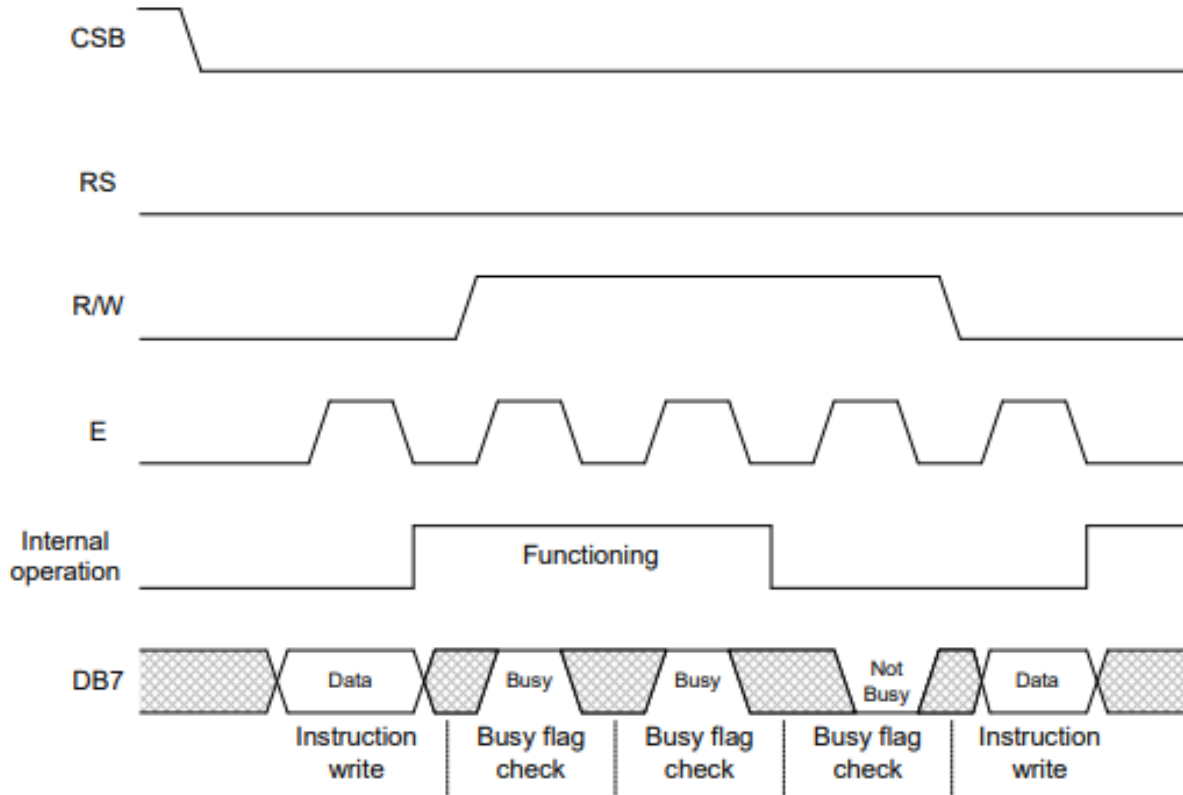


Busy Flag:

When BF = "HIGH", it indicates that the internal operation is being processed. So during this time the next instruction cannot be accepted. BF can be read when RS = "LOW" and R/W = "HIGH" (Read Instruction Operation), through DB7 Port. Before executing the next instruction, be sure that BF is not "HIGH".

RS	R/W	Operation
L	L	Instruction Write operation (MPU writes Instruction code into IR)
L	H	Read Busy Flag(DB7) and address counter (DB0 ~ DB6)
H	L	Data Write operation (MPU writes data into DR)
H	H	Data Read operation (MPU reads data from DR)

Instruction	Instruction Code										Description	Execution Time
	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0		
Read Busy Flag & Address	0	1	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Read Busy Flag (BF) and Address Counter.	-
Read data from CGRAM or DDRAM	1	1	Read Data								Read data from CGRAM or DDRAM	18.5us

Serial Interface

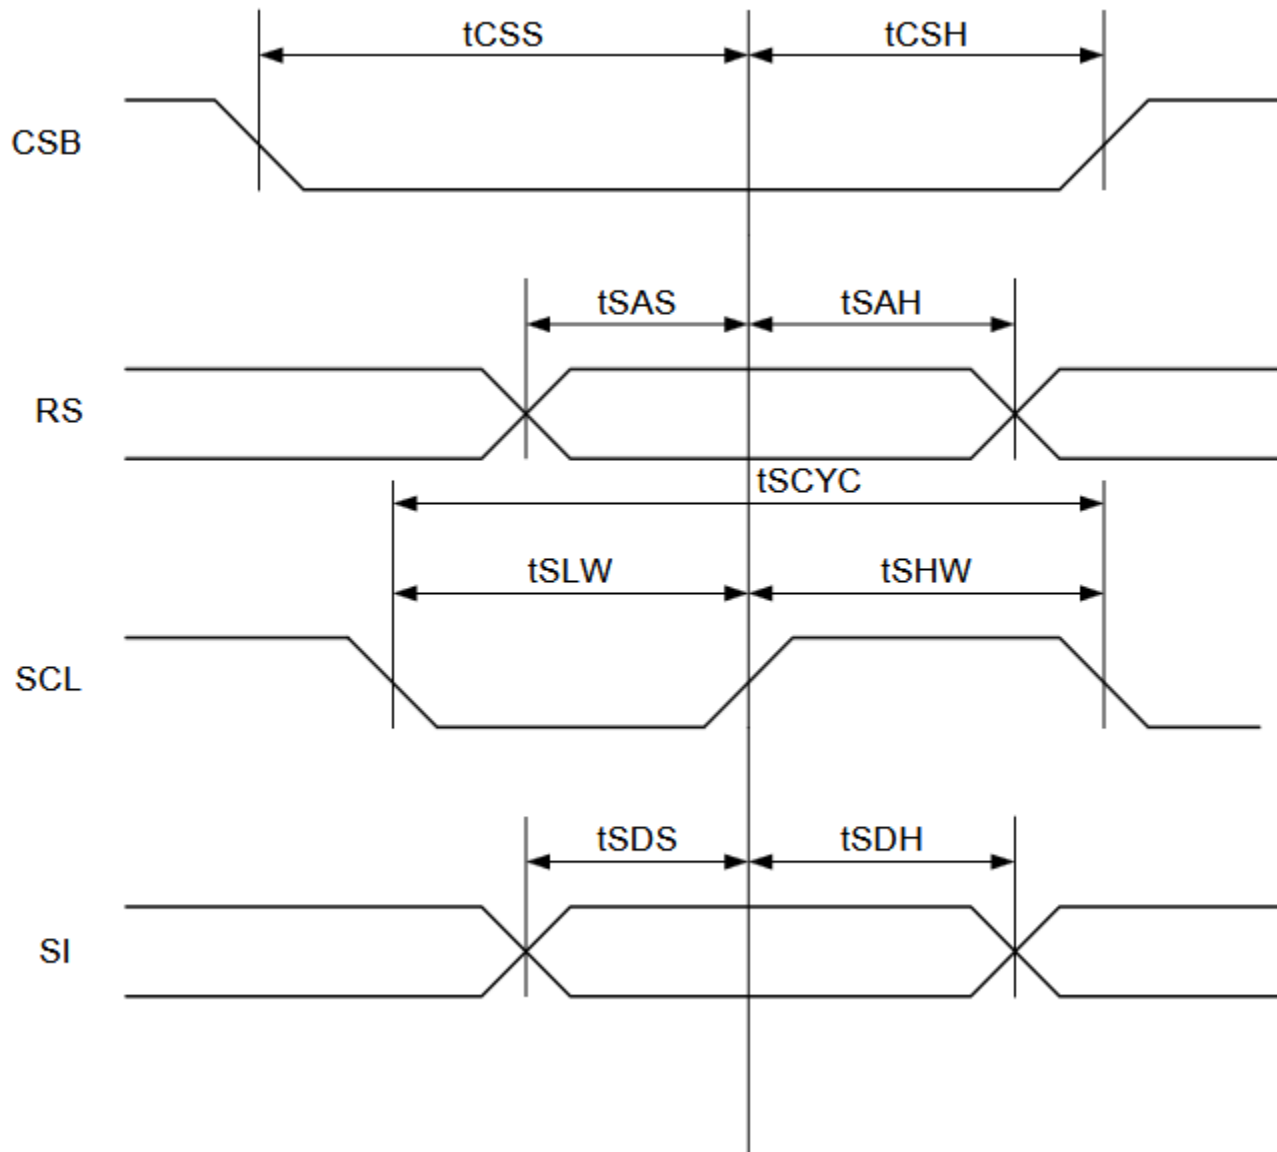

Item	Signal	Symbol	Condition	VDD=2.7 to 4.5V Rating		VDD=4.5 to 5.5V Rating		Units
				Min.	Max.	Min.	Max.	
Serial Clock Period	SCL	tSCYC	—	200	-	100	-	ns
SCL "H" pulse width		tSHW		20	-	20	-	
SCL "L" pulse width		tslw		160	-	120	-	
Address setup time	RS	tsAS	—	10	-	10	-	ns
Address hold time		tsAH		250	-	150	-	
Data setup time	SI	tSDS	—	10	-	10	-	ns
Data hold time		tSDH		10	-	20	-	
CS-SCL time	CS	tCSS	—	20	-	20	-	ns
		tCSH		350	-	200	-	

Built-In Font Table (OPR = 0, OPR2 = 0)

h7-h6 h5-h0	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0000		À	Á	Â	Ã	Ä	Å	Æ	Ç	È	É	Ê	Ë	Ì	Í	Î
0001		Ï	Ð	Ñ	Ò	Ó	Ô	Õ	Ö	×	Ø	Ù	Ú	Û	Ü	Ý
0010		à	á	â	ã	ä	å	æ	ç	è	é	ê	ë	ì	í	î
0011		ï	ð	ñ	ò	ó	ô	õ	ö	×	ø	ù	ú	û	ü	ý
0100		ÿ	£	¤	¥	¦	§	¨	©	ª	«	¬	®	¯	°	±
0101		²	³	´	µ	¶	·	¸	¹	º	»	¼	½	¾	¿	À
0110		Á	Â	Ã	Ä	Å	Æ	Ç	È	É	Ê	Ë	Ì	Í	Î	Ï
0111		Ð	Ñ	Ò	Ó	Ô	Õ	Ö	×	Ø	Ù	Ú	Û	Ü	Ý	Þ
1000		ß	à	á	â	ã	ä	å	æ	ç	è	é	ê	ë	ì	í
1001		î	ï	ð	ñ	ò	ó	ô	õ	ö	÷	ø	ù	ú	û	ü
1010		ý	þ	ÿ	À	Á	Â	Ã	Ä	Å	Æ	Ç	È	É	Ê	Ë
1011		Ì	Í	Î	Ï	Ð	Ñ	Ò	Ó	Ô	Õ	Ö	×	Ø	Ù	Ú
1100		Û	Ü	Ý	Þ	ß	à	á	â	ã	ä	å	æ	ç	è	é
1101		ê	ë	ì	í	î	ï	ð	ñ	ò	ó	ô	õ	ö	÷	ø
1110		ù	ú	û	ü	ý	þ	ÿ	À	Á	Â	Ã	Ä	Å	Æ	Ç
1111		È	É	Ê	Ë	Ì	Í	Î	Ï	Ð	Ñ	Ò	Ó	Ô	Õ	Ö

Example Initialization Program

```

/*****
*           8-bit 6800 Parallel Interface           *
*****/

```

```

void command(char i)
{
    PORTD = i;
    digitalWrite(RS, LOW);      //RS = 0
    digitalWrite(RW, LOW);      //RW = 0
    digitalWrite(E, HIGH);      // E = 1
    delay(1);                   //delay of 1 Millisecond
    digitalWrite(E, LOW);       // E = 0
    delay(1);                   //delay of 1 Millisecond
}

```

```

void data(char i)
{
    PORTD = i;
    digitalWrite(RS, HIGH);     //RS = 1
    digitalWrite(RW, LOW);      //RW = 0
    digitalWrite(E, HIGH);      // E = 1
    delay(1);                   //delay of 1 Millisecond
    digitalWrite(E, LOW);       // E = 0
    delay(1);                   //delay of 1 Millisecond
}

```

```

/*****
*           Initialization Routine           *
*****/

```

```

void init1()
{
    delay(40);      // Delay of 40 Milliseconds
    command(0x39);  // Function Set
    command(0x39);  // Function Set
    command(0x14);  // Bias Set
    command(0x70);  // Contrast Set
    command(0x5E);  // Power/Icon/Contrast Control
    command(0x6A);  // Follower Control
    command(0x0C);  // Display On/OFF
    command(0x01);  // Clear Display
    command(0x06);  // Entry Mode Set
}

```



Quality Information

Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	+80°C , 240 Hrs.	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C , 240 Hrs.	1,2
High Temperature Operation	Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.	+70°C , 240 Hrs.	2
Low Temperature Operation	Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.	-20°C , 240 Hrs.	1,2
High Temperature / Humidity Storage	Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time.	+60°C , 90% RH , 240 Hrs.	1,2
Thermal Shock resistance	Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.	-30°C,30min -> 25°C,5min -> 80°C,30min = 1 cycle For 10 cycles	
Vibration test	Endurance test applying vibration to simulate transportation and use.	Frequency: 250 times/minute 1 inch distance For 45 minutes	3
Static electricity test	Endurance test applying electric static discharge.	Air Discharge= ±8kV, 5 times Contact Discharge = ±4kV, 5 times	

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.