

Connection distributor - PSM PTK-4 - 2799364

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Passive RS-485 T-distributor, fitted with one 9-pin D-SUB pin strip and five 9-pin D-SUB socket strips



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 074050
Weight per Piece (excluding packing)	154.2 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Dimensions

Width	89.8 mm
Height	89.6 mm
Length	39 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 70 °C
---------------------------------	------------------

General

Nominal voltage U_N	60 V AC/DC
Nominal current I_N	1 A
Bus system	RS-485
Shielding	D-SUB frame
Test voltage	500 V AC (50 Hz, 1 min, rms)

Connection distributor - PSM PTK-4 - 2799364

Technical data

General

Housing material	PVC
Flammability rating according to UL 94	V0
Pin assignment	all 1:1

Connection data

Connection	Incoming
Number of positions	9
Connection method	D-SUB-9 plug
Connection	Outgoing
Number of positions	9
Connection method	D-SUB-9 female connector
Connection	Branching
Number of positions	9
Connection method	4 x D-SUB-9 socket

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Classifications

eCl@ss

eCl@ss 4.0	27230207
eCl@ss 4.1	27230207
eCl@ss 5.0	27230207
eCl@ss 5.1	27230207
eCl@ss 6.0	27230207
eCl@ss 7.0	27230207
eCl@ss 8.0	27242208

ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC001423
ETIM 5.0	EC001423

UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008

Connection distributor - PSM PTK-4 - 2799364

Classifications

UNSPSC

UNSPSC 12.01	39121008
UNSPSC 13.2	39121008

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approvals submitted


Approval details

EAC

EAC

Drawings

Circuit diagram

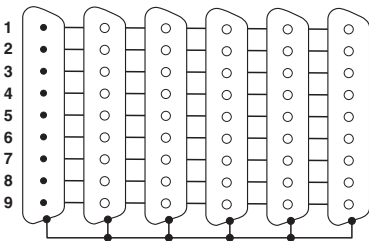

Connection distributor - PSM PTK-4 - 2799364

Dimensional drawing

