

Panel mounting frames - VS-PPC-F1-SCRJ-MNNA-1RP



1608061

<https://www.phoenixcontact.com/in/products/1608061>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



SC-RJ panel mounting frame, IP67, for push-pull interlocking, metal, for transceiver, for square panel cutout, with grommet, without mounting screws

Panel mounting frames - VS-PPC-F1-SCRJ-MNNA-1RP



1608061

<https://www.phoenixcontact.com/in/products/1608061>

Commercial Data

Item number	1608061
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	ABN
Product Key	ABNECF
Catalog Page	Page 356 (C-4-2015)
GTIN	4046356131735
Weight per Piece (including packing)	15.4 g
Weight per Piece (excluding packing)	14.5 g
Customs tariff number	85389099
Country of origin	DE

Panel mounting frames - VS-PPC-F1-SCRJ-MNNA-1RP



1608061

<https://www.phoenixcontact.com/in/products/1608061>

Technical Data

Notes

General	This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 8.4 Connectors for outside environment (optical fibre) and chapter 13 Application specific Cabling and Interconnection Technology (AIDA)
---------	---

Product properties

Type	SCRJ, IP65/67, version 14
Product type	Panel mounting frame
Number of positions	2
Application	SCRJ PCB connection
Cable outlet	straight

Insulation characteristics


Degree of pollution	2
---------------------	---

Connection data

Connection technology

Connection method	Push-Pull
-------------------	-----------

Dimensions

Dimensional drawing	
Width	22.2 mm
Height	42 mm

Mechanical characteristics

Ferrule diameter	2.50 mm
------------------	---------

Material specifications

Color	silver
Material	Metal
Flammability rating according to UL 94	V0
Sealing material	NBR
Housing surface material	Nickel-plated
Housing material	Zinc die-cast

Connector

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Panel mounting frames - VS-PPC-F1-SCRJ-MNNA-1RP



1608061

<https://www.phoenixcontact.com/in/products/1608061>

Cable / line

Ambient conditions

Resistance to oil	yes
Flame resistance	yes

FO cable

Number of fibers	2
Fiber	POF, PCF, GOF
Fiber type	GOF, PCF, POF
Transmission medium	FO

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65/IP67
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	0 °C ... 50 °C
Resistance to oil	yes

Standards and regulations

Flame resistance	yes
Resistance to oil	yes

Mounting

Mounting type	Wall mounting
---------------	---------------


Panel mounting frames - VS-PPC-F1-SCRJ-MNNA-1RP

1608061

<https://www.phoenixcontact.com/in/products/1608061>


Drawings

Drilling plan/solder pad geometry

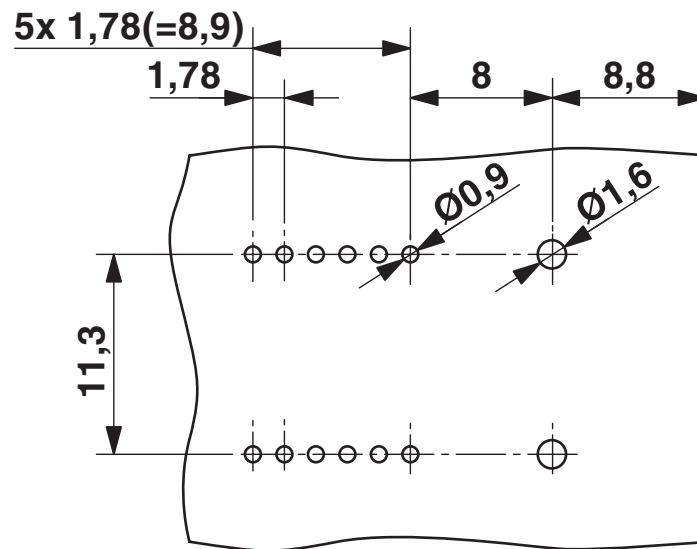

Drilling diagram

Dimensional drawing

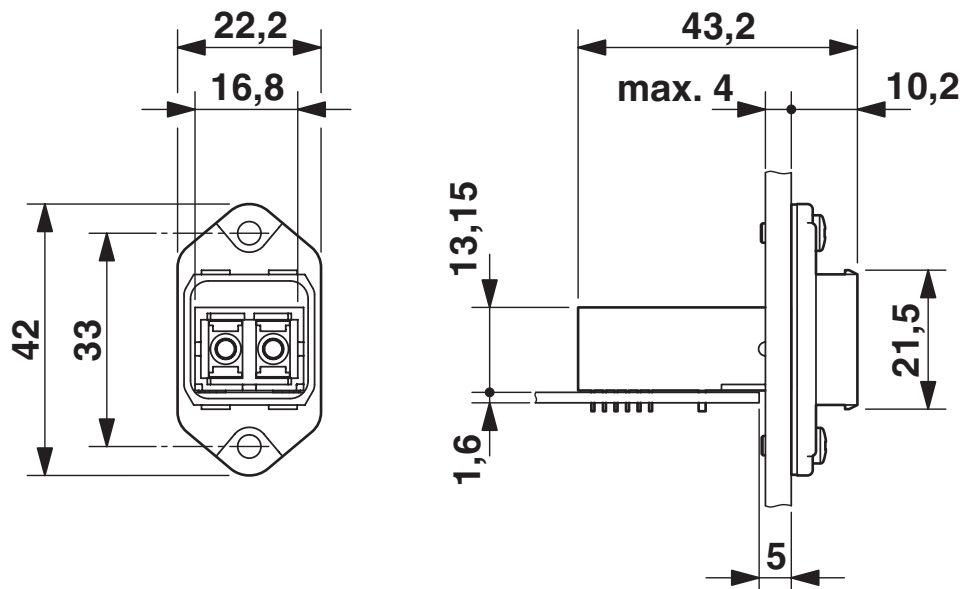


Push-Pull SC-RJ panel mounting frame

Panel mounting frames - VS-PPC-F1-SCRJ-MNNA-1RP

1608061


<https://www.phoenixcontact.com/in/products/1608061>

Dimensional drawing

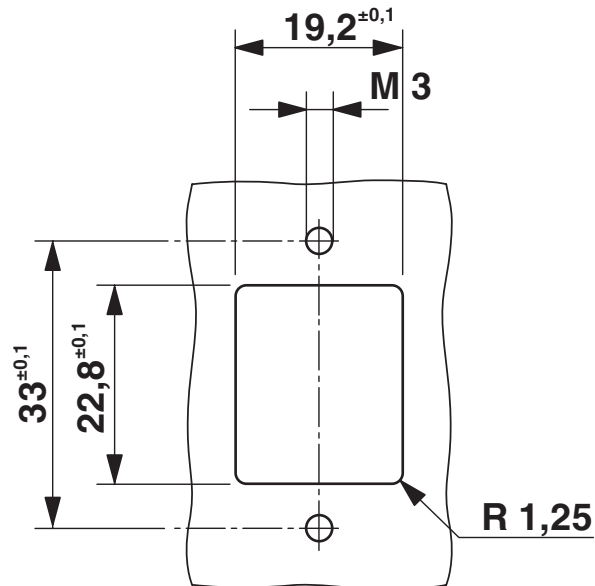

Mounting cutout

Dimensional drawing

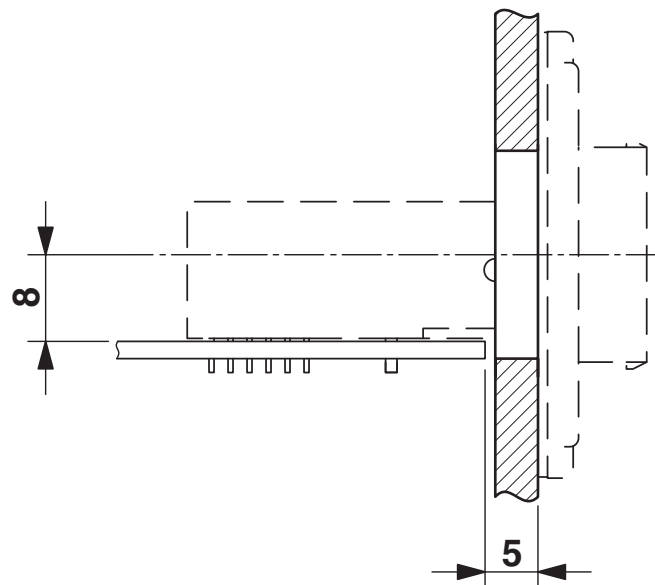

Panel mounting frames - VS-PPC-F1-SCRJ-MNNA-1RP



1608061

<https://www.phoenixcontact.com/in/products/1608061>

Approvals



EAC

Approval ID: 7500651.22.01.00246

Panel mounting frames - VS-PPC-F1-SCRJ-MNNA-1RP



1608061

<https://www.phoenixcontact.com/in/products/1608061>

Classifications

ECLASS

ECLASS-9.0	27440210
ECLASS-10.0.1	27440210
ECLASS-11.0	27440210

ETIM

ETIM 8.0	EC002310
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in