

D-SUB panel mounting frames - VS-15-A-GC-BU/BU



1689718

<https://www.phoenixcontact.com/de/produkte/1689718>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

D-SUB panel mounting frame, shell size 2, with 15 signal contacts, socket, gender changer, shielded, IP67 degree of protection



Commercial Data

Item number	1689718
Packing unit	5 pc
Minimum order quantity	5 pc
Sales Key	D1 - Steckverbinder
Product Key	ABNFAC
Catalog Page	Page 221 (C-2-2013)
GTIN	4017918934125
Weight per Piece (including packing)	23,23 g
Weight per Piece (excluding packing)	23,18 g
Customs tariff number	85366990
Country of origin	DE

Technical Data

Notes

Safety note

Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- **WARNING:** Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.

- **WARNING:** Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.

- The products are suitable for applications in plant, controller, and electrical device engineering.

- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.

- Assembled products may not be manipulated or improperly opened.

- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)).

- When using the product in direct connection with third-party manufacturers, the user is responsible.

- For operating voltages > 50 V AC, conductive connector housings must be grounded

- Only use tools recommended by Phoenix Contact

- The installation notes/Design In documents online on the download page at [phoenixcontact.com/products](https://www.phoenixcontact.com/products) must be observed for this product.

- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)

- Operate the connector only when it is fully plugged in and interlocked.

- Operate the connector only when it is fully plugged in.

- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.

- Observe the minimum bending radius of the cable. Lay the cable without twisting it.

- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector

Product properties

D-SUB panel mounting frames - VS-15-A-GC-BU/BU



1689718

<https://www.phoenixcontact.com/de/produkte/1689718>

Type	Shell size 2
Product type	Panel mounting frame
Number of positions	15
Connection profile	D-SUB
Application	Gender changer
Type	Female/Female


Insulation characteristics

Overvoltage category	III
Degree of pollution	2

Electrical properties

Rated voltage (III/3)	125 V
Rated current	5 A
Transmission medium	Copper

Dimensions

Dimensional drawing	
Width	24 mm
Height	27.9 mm
Length	62.3 mm

Material specifications

Color	gray
Material	Plastic
Flammability rating according to UL 94	V0
Sealing material	Flat gasket: NBR; profile gasket: EPDM
Housing surface material	PA, light gray
Contact material	Copper alloy
Contact surface material	Au/Ni
Contact carrier material	Polyester GF
Housing material	Plastic

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 200
-----------------------------	-------

Environmental and real-life conditions

D-SUB panel mounting frames - VS-15-A-GC-BU/BU



1689718

<https://www.phoenixcontact.com/de/produkte/1689718>


Ambient conditions

Degree of protection	IP65/IP67
Ambient temperature (operation)	-40 °C ... 80 °C

Mounting

Mounting type	Front mounting
---------------	----------------


Drawings

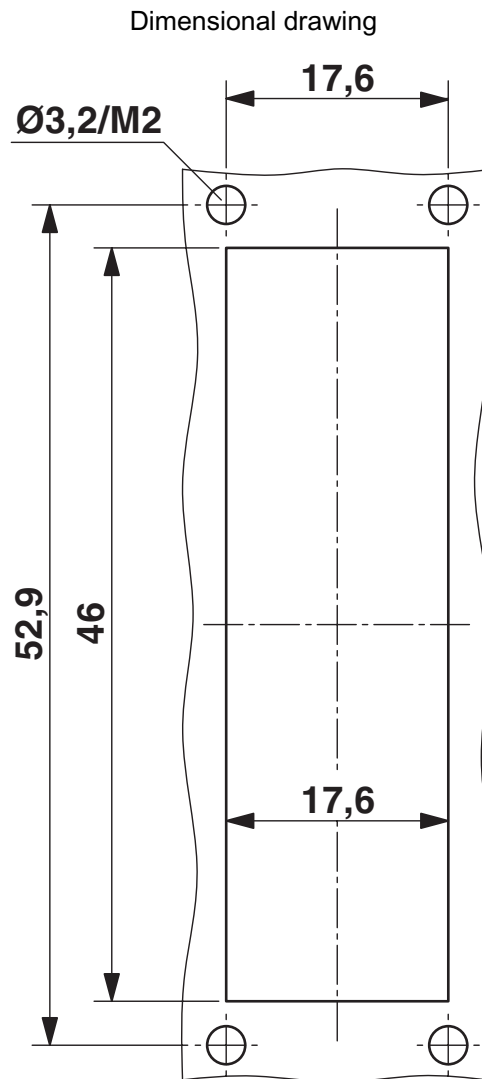

Mounting cutout: VS-15-A...

1689718

<https://www.phoenixcontact.com/de/produkte/1689718>

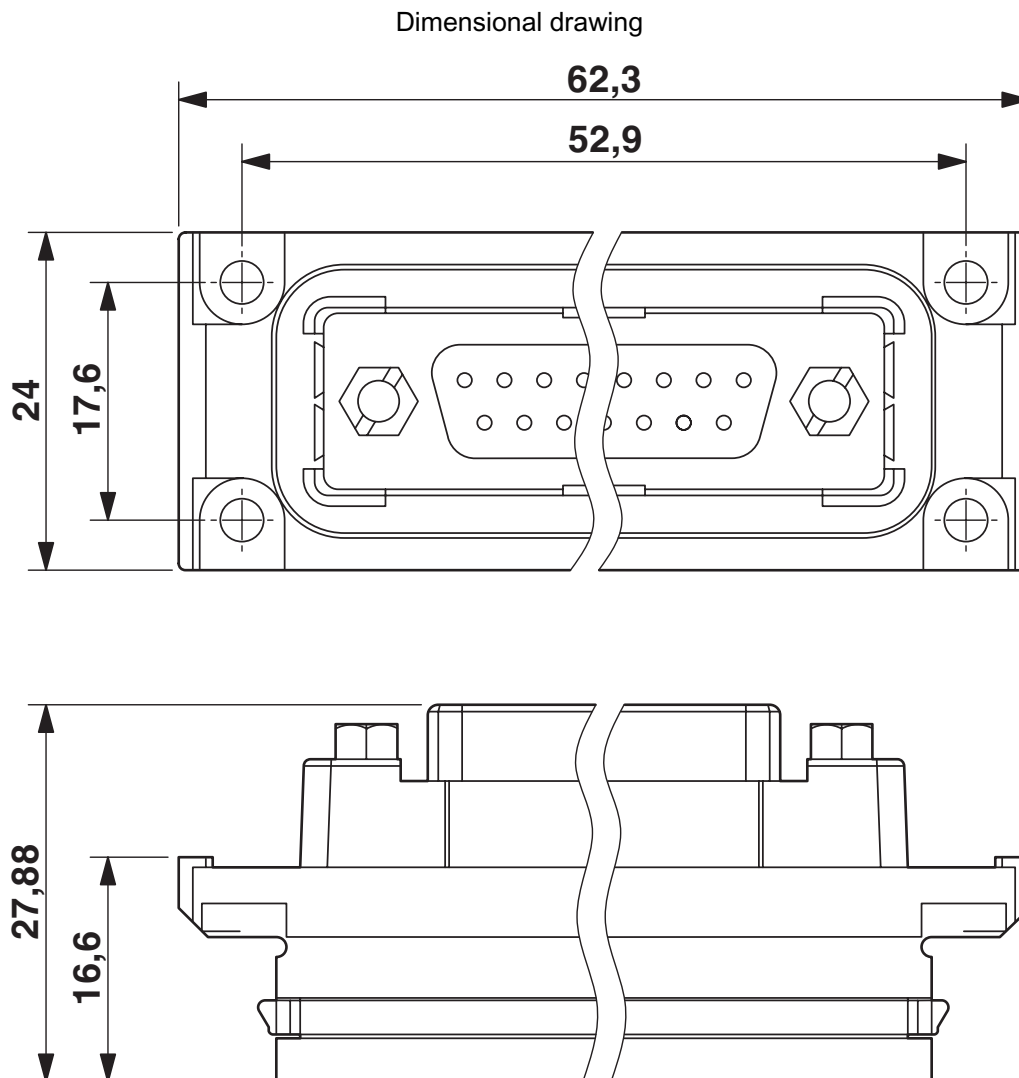

D-SUB panel mounting frame

D-SUB panel mounting frames - VS-15-A-GC-BU/BU



1689718

<https://www.phoenixcontact.com/de/produkte/1689718>

Approvals



EAC

Approval ID: B.01687

D-SUB panel mounting frames - VS-15-A-GC-BU/BU



1689718

<https://www.phoenixcontact.com/de/produkte/1689718>

Classifications

ECLASS

ECLASS-10.0.1	27440214
ECLASS-9.0	27440214
ECLASS-11.0	27440214

ETIM

ETIM 8.0	EC001136
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

D-SUB panel mounting frames - VS-15-A-GC-BU/BU



1689718

<https://www.phoenixcontact.com/de/produkte/1689718>

Accessories

D-SUB protective cover

D-SUB protective cover - VS-15-SD - 1887099

<https://www.phoenixcontact.com/de/produkte/1887099>

D-SUB protective cover, shell size 2, IP54 degree of protection, for panel mounting frame and sleeve housing VS-15-...



Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH
Flachmarktstraße 8
D-32825 Blomberg
+49 52 35/3-1 20 00
info@phoenixcontact.de