


Device connector, rear mounting - SACC-DSI-M 8MS-3CON-M 8/0,5



1453478

<https://www.phoenixcontact.com/de/produkte/1453478>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Device connector, rear mounting, 3-position, Plug, straight, M8, Rear mounting, M8 x 1, Individual wires, cable length: 0.5 m, 0.25 mm², PVC litz wire

Your advantages

- Pre-assembled with litz wires for immediate use
- Customer-specific assemblies and litz wire lengths available
- Sealed on the litz wire side for optimum leak-tightness
- Standard pin assignments and codings for signal transmission with a uniform design-in design

Commercial Data

Item number	1453478
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	C1 - Sensor-Aktor-Kabel
Product Key	ABQBBC
Catalog Page	Page 34 (C-2-2019)
GTIN	4046356554381
Weight per Piece (including packing)	11,925 g
Weight per Piece (excluding packing)	10,6 g
Customs tariff number	85444290
Country of origin	DE

Device connector, rear mounting - SACC-DSI-M 8MS-3CON-M 8/0,5



1453478

<https://www.phoenixcontact.com/de/produkte/1453478>

Technical Data

Mounting

Mounting type	Rear mounting M8 x 1 With flat nut
Assembly instructions	With flat nut

Product properties

Product type	Circular connectors (device side)
Number of positions	3
No. of cable outlets	1
Shielded	no
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	HB
Seal material	FKM
Contact material	Cu alloy
Contact surface material	Au
Contact carrier material	PUR / PA 6.6
Material for screw connection	Nickel-plated brass

Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	48 V AC
	60 V DC
Nominal current I_N	4 A

Connection data

Conductor connection

Connection method	Individual wires
Tightening torque	1 Nm
	1.5 Nm

Connector

Connection 1

Head design	Plug
-------------	------

Device connector, rear mounting - SACC-DSI-M 8MS-3CON-M 8/0,5



1453478

<https://www.phoenixcontact.com/de/produkte/1453478>

Head cable outlet	straight
Head thread type	M8

Cable/line

Cable length	0.5 m
Cable type	PVC litz wire
Wire diameter incl. insulation	1.5 mm $\pm$ 0.1 mm
Single wire, color	brown, blue, black
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	7x 0.20 mm
AWG signal line	24
Material wire insulation	PVC / UL
Thickness, insulation	0.21 mm
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Cable resistance	$\geq 80 \Omega/\text{km}$
Cable insulation resistance	$\geq 20 \text{ M}\Omega \cdot \text{km}$
Ambient temperature (operation)	-40 °C ... 105 °C (cable, fixed installation)
	-10 °C ... 105 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug)
	-40 °C ... 105 °C (cable, fixed installation)
	-10 °C ... 105 °C (Cable, flexible installation)

Standards and regulations

M8

Standards/specifications	IEC 61076-2-104
--------------------------	-----------------


Device connector, rear mounting - SACC-DSI-M 8MS-3CON-M 8/0,5

1453478

<https://www.phoenixcontact.com/de/produkte/1453478>


Drawings

Schematic diagram

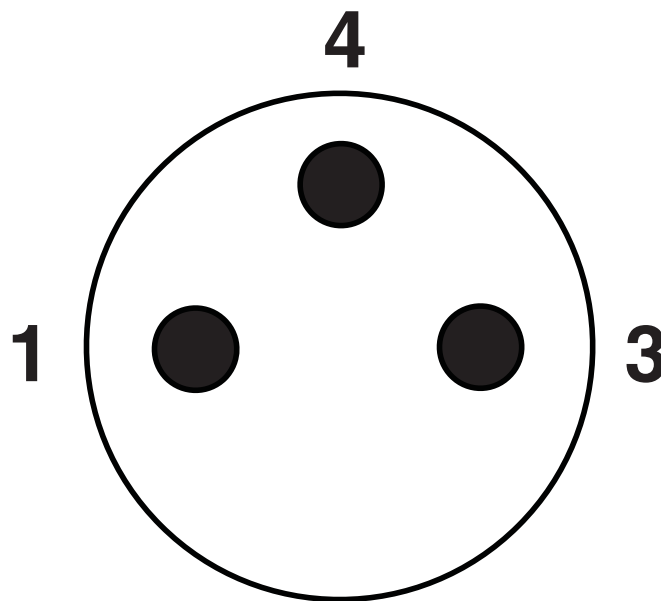

Pin assignment M8 plug, 3-pos., view male side

Dimensional drawing

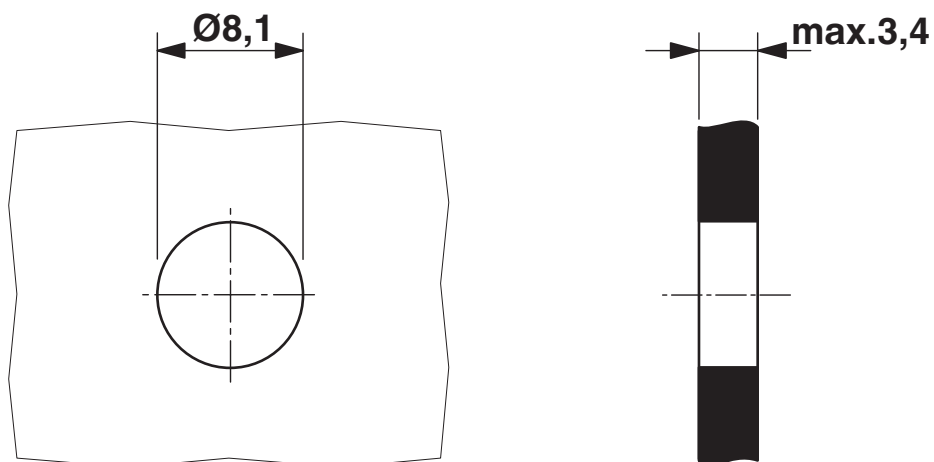


Housing cutout for M8 flush-type connector, connector, one-section

Device connector, rear mounting - SACC-DSI-M 8MS-3CON-M 8/0,5

1453478

<https://www.phoenixcontact.com/de/produkte/1453478>

Dimensional drawing

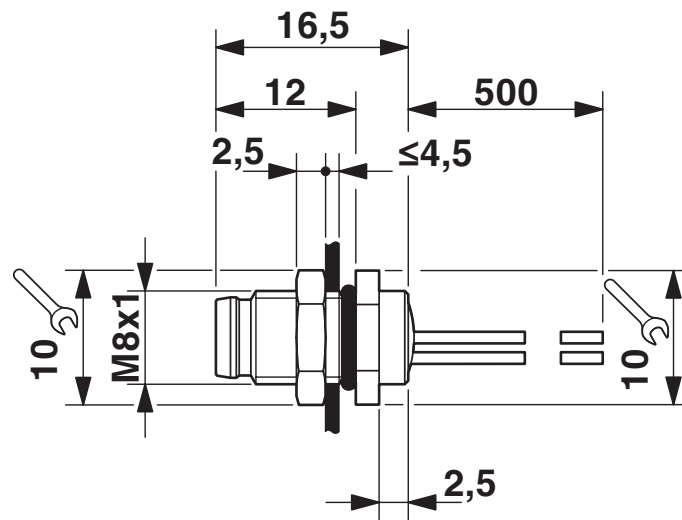

M8 flush-type plug

Device connector, rear mounting - SACC-DSI-M 8MS-3CON-M 8/0,5



1453478

<https://www.phoenixcontact.com/de/produkte/1453478>

Approvals

	cUL Recognized			
	Approval ID: FILE E 221474			
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	30 V	4 A	-	-

	UL Recognized			
	Approval ID: FILE E 221474			
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	30 V	4 A	-	-

	EAC			
	Approval ID: B.01687			

cULus Recognized				
-------------------------	--	--	--	--

Device connector, rear mounting - SACC-DSI-M 8MS-3CON-M 8/0,5



1453478

<https://www.phoenixcontact.com/de/produkte/1453478>

Classifications

ECLASS

ECLASS-9.0	27440102
ECLASS-10.0.1	27440102
ECLASS-11.0	27440102

ETIM

ETIM 8.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Device connector, rear mounting - SACC-DSI-M 8MS-3CON-M 8/0,5



1453478
<https://www.phoenixcontact.com/de/produkte/1453478>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH
Flachmarktstraße 8
D-32825 Blomberg
+49 52 35/3-1 20 00
info@phoenixcontact.de