

Device connector, rear mounting - SACC-DSI-FS-8CON-PG 9/0,5 SCO



1542732

<https://www.phoenixcontact.com/de/produkte/1542732>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Device connector, rear mounting, Universal, 8-position, Flush-type female connector, straight, M12-SPEEDCON, coding: A , on free cable end, Rear mounting, Pg9, Individual wires, cable length: 0.5 m, 0.25 mm², TPE litz wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1239959

Your advantages

- Pre-assembled with litz wires for immediate use
- Customer-specific assemblies and litz wire lengths available
- Sealed on the litz wire side for optimum leak-tightness
- All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- For high transmission safety: shield connection to the housing with optional EMC nut
- SPEEDCON fast locking system reduces cabling times

Commercial Data

Item number	1542732
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	C1 - Sensor-Aktor-Kabel
Product Key	ABQCDH
Catalog Page	Page 46 (C-2-2019)
GTIN	4046356097741
Weight per Piece (including packing)	27,9 g
Weight per Piece (excluding packing)	27,62 g
Customs tariff number	85444290
Country of origin	DE

Device connector, rear mounting - SACC-DSI-FS-8CON-PG 9/0,5 SCO



1542732

<https://www.phoenixcontact.com/de/produkte/1542732>

Technical Data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

Mounting

Mounting type	Rear mounting
Assembly instructions	With locking nut

Product properties

Product type	Circular connectors (device side)
Number of positions	8
No. of cable outlets	1
Shielded	no
Coding	A
Thread type	M12

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	30 V (AC)
	30 V (DC)
Nominal current I_N	2 A

Connection data

Conductor connection

Device connector, rear mounting - SACC-DSI-FS-8CON-PG 9/0,5 SCO



1542732

<https://www.phoenixcontact.com/de/produkte/1542732>

Connection method	Individual wires
Type of contact	Crimp contacts
Conductor cross section	0.25 mm²
Tightening torque	2 Nm
	3 Nm

Connector

Connection 1

Head design	Flush-type female connector
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	A

Connection 2

Head design	free cable end
-------------	----------------

Cable/line

Cable length	0.5 m
Cable type	TPE litz wire
Signal type/category	Universal
Wire diameter incl. insulation	1.15 mm ±0.07 mm
Single wire, color	Brown, blue, white, gray, pink, green, yellow, red
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	14x 0.15 mm
AWG signal line	24
Material wire insulation	TPE
Thickness, insulation	0.21 mm
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Cable resistance	≤ 80 mΩ/m
Cable insulation resistance	≥ 20 MΩ*km
Ambient temperature (operation)	-40 °C ... 85 °C (cable, fixed installation)
	-25 °C ... 85 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67 (When plugged in)
	IP65 (When plugged in)
	IP65/IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)

Device connector, rear mounting - SACC-DSI-FS-
8CON-PG 9/0,5 SCO



1542732
<https://www.phoenixcontact.com/de/produkte/1542732>

	-25 °C ... 85 °C (Cable, flexible installation)
	-40 °C ... 85 °C (cable, fixed installation)

Standards and regulations

M12	
Standards/specifications	IEC 61076-2-101


Device connector, rear mounting - SACC-DSI-FS-8CON-PG 9/0,5 SCO

1542732

<https://www.phoenixcontact.com/de/produkte/1542732>


Drawings

Schematic diagram

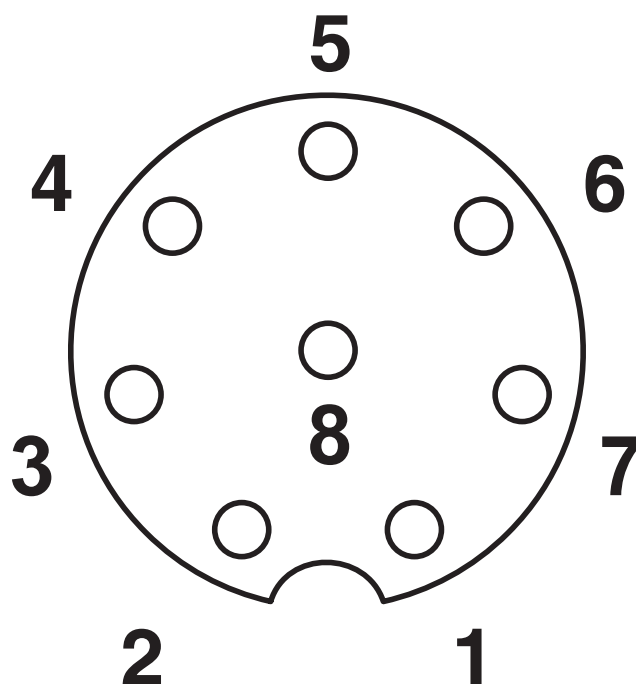

Pin assignment M12 socket, 8-pos., A-coded, view female side

Dimensional drawing

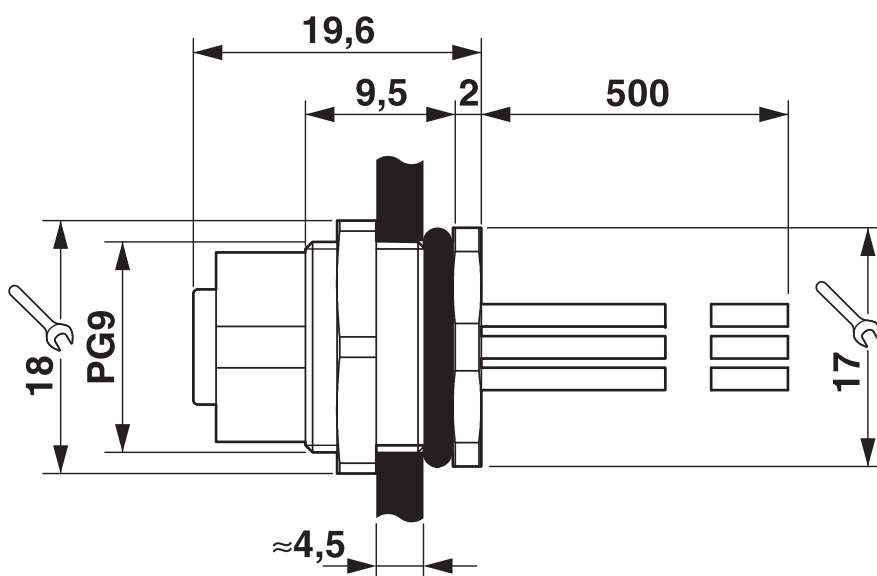

M12 flush-type connector


Device connector, rear mounting - SACC-DSI-FS-8CON-PG 9/0,5 SCO



1542732

<https://www.phoenixcontact.com/de/produkte/1542732>

Circuit diagram

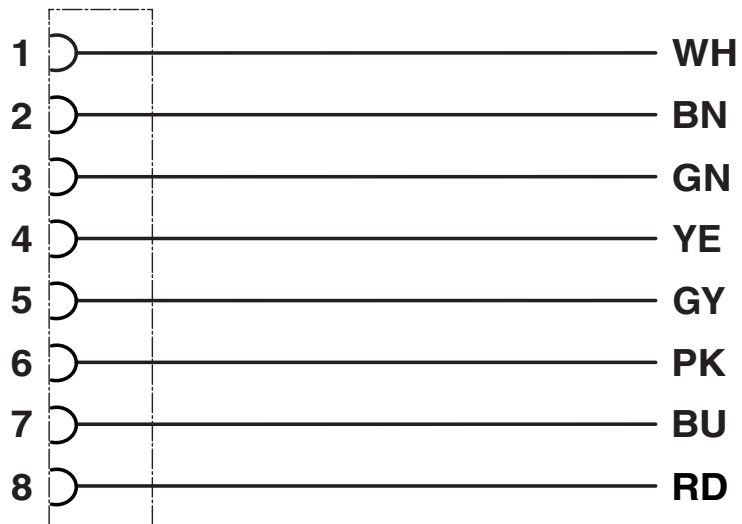


Device connector, rear mounting - SACC-DSI-FS-
8CON-PG 9/0,5 SCO

1542732

<https://www.phoenixcontact.com/de/produkte/1542732>

Dimensional drawing

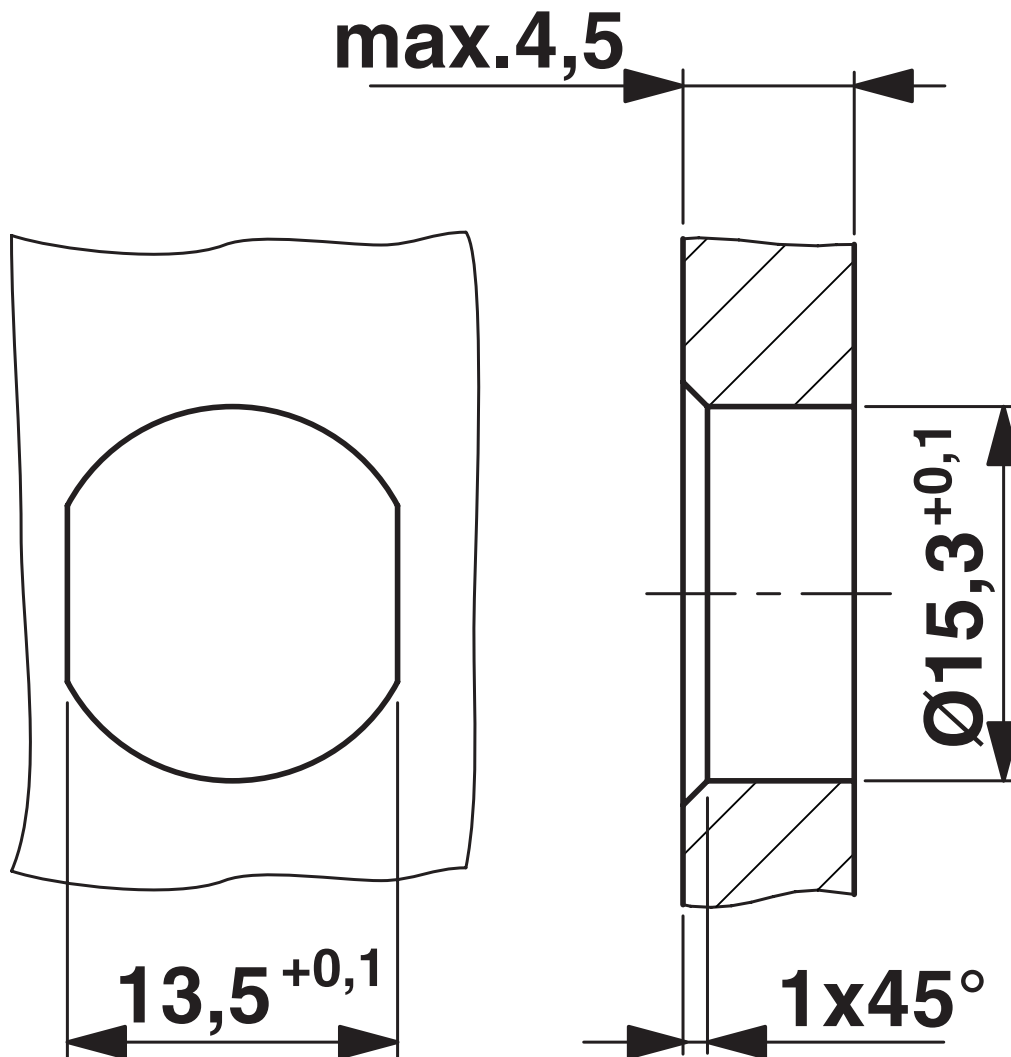


Housing cutout for Pg9 fastening thread, mounting panel with feed-through hole (alternatively with surface as protection against rotation)

Device connector, rear mounting - SACC-DSI-FS-8CON-PG 9/0,5 SCO

1542732

<https://www.phoenixcontact.com/de/produkte/1542732>

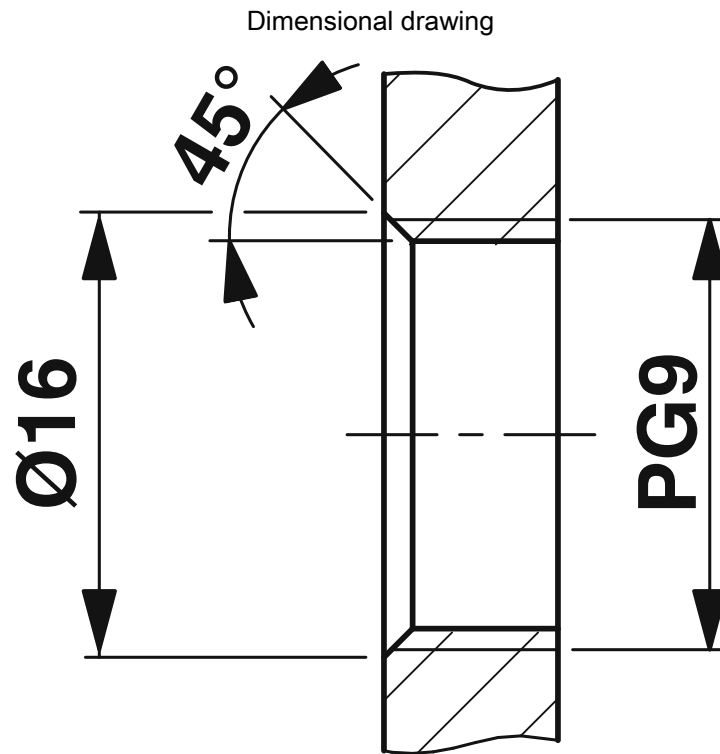

Housing cutout for Pg9 fastening thread, mounting panel with thread

Device connector, rear mounting - SACC-DSI-FS-8CON-PG 9/0,5 SCO



1542732

<https://www.phoenixcontact.com/de/produkte/1542732>

Approvals



UL Recognized

Approval ID: FILE E 118976

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	30 V	2 A	- 24	-



EAC

Approval ID: B.01687



cULus Recognized

Approval ID: E221474-20140616

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	30 V	2 A	24 - 22	-

Device connector, rear mounting - SACC-DSI-FS-8CON-PG 9/0,5 SCO



1542732

<https://www.phoenixcontact.com/de/produkte/1542732>

Classifications

ECLASS

ECLASS-9.0	27440102
ECLASS-10.0.1	27440102
ECLASS-11.0	27440102

ETIM

ETIM 8.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Device connector, rear mounting - SACC-DSI-FS-8CON-PG 9/0,5 SCO



1542732
<https://www.phoenixcontact.com/de/produkte/1542732>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH
Flachmarktstraße 8
D-32825 Blomberg
+49 52 35/3-1 20 00
info@phoenixcontact.de