


# MC 1,5/ 3-STF-3,81 - PCB connector



1827716

<https://www.phoenixcontact.com/pc/products/1827716>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



PCB connector, nominal cross section: 1.5 mm<sup>2</sup>, color: green, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Socket, number of potentials: 3, number of rows: 1, number of positions: 3, number of connections: 3, product range: MC 1,5/-STF, pitch: 3.81 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, plug-in system: COMBICON MC 1,5, locking: Screw locking, mounting: Screw flange, type of packaging: packed in cardboard

## Your advantages

- Well-known connection principle allows worldwide use
- Low temperature rise, thanks to maximum contact force
- Allows connection of two conductors
- Screwable flange for superior mechanical stability

## Commercial Data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1827716             |
| Packing unit                         | 250 pc              |
| Minimum order quantity               | 250 pc              |
| Product Key                          | AABABB              |
| Catalog Page                         | Page 191 (C-1-2013) |
| GTIN                                 | 4017918050177       |
| Weight per Piece (including packing) | 3.093 g             |
| Weight per Piece (excluding packing) | 3.024 g             |
| Customs tariff number                | 85366990            |
| Country of origin                    | DE                  |

# MC 1,5/ 3-STF-3,81 - PCB connector



1827716

<https://www.phoenixcontact.com/pc/products/1827716>

## Technical Data

### Product properties

|                       |                       |
|-----------------------|-----------------------|
| Type                  | Standard              |
| Product line          | COMBICON Connectors S |
| Product type          | PCB connector         |
| Product family        | MC 1,5/...-STF        |
| Number of positions   | 3                     |
| Pitch                 | 3.81 mm               |
| Number of connections | 3                     |
| Number of rows        | 1                     |
| Mounting flange       | Screw flange          |
| Number of potentials  | 3                     |

### Electrical properties

|                             |        |
|-----------------------------|--------|
| Nominal current $I_N$       | 8 A    |
| Nominal voltage $U_N$       | 160 V  |
| Degree of pollution         | 3      |
| Contact resistance          | 1.3 mΩ |
| Rated voltage (III/3)       | 160 V  |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated voltage (III/2)       | 160 V  |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated voltage (II/2)        | 320 V  |
| Rated surge voltage (II/2)  | 2.5 kV |

### Connection data

#### Connection technology

|                       |                     |
|-----------------------|---------------------|
| Type                  | Standard            |
| Connector system      | COMBICON MC 1,5     |
| Nominal cross section | 1.5 mm <sup>2</sup> |
| Type of contact       | Socket              |

#### Interlock

|                   |               |
|-------------------|---------------|
| Locking type      | Screw locking |
| Mounting flange   | Screw flange  |
| Tightening torque | 0.3 Nm        |

#### Conductor connection

|                                    |                                              |
|------------------------------------|----------------------------------------------|
| Connection method                  | Screw connection with tension sleeve         |
| Conductor/PCB connection direction | 0 °                                          |
| Conductor cross section rigid      | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section flexible   | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section AWG        | 28 ... 16                                    |

# MC 1,5/ 3-STF-3,81 - PCB connector



1827716

<https://www.phoenixcontact.com/pc/products/1827716>

|                                                                                           |                                               |
|-------------------------------------------------------------------------------------------|-----------------------------------------------|
| Conductor cross section flexible, with ferrule without plastic sleeve                     | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Conductor cross section, flexible, with ferrule, with plastic sleeve                      | 0.25 mm <sup>2</sup> ... 0.75 mm <sup>2</sup> |
| 2 conductors with same cross section, solid                                               | 0.08 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, flexible                                            | 0.08 mm <sup>2</sup> ... 0.75 mm <sup>2</sup> |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm <sup>2</sup> ... 0.34 mm <sup>2</sup> |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>   |
| Cylindrical gauge a x b / diameter                                                        | 2.4 mm x 1.5 mm / 1.6 mm                      |
| Stripping length                                                                          | 7 mm                                          |
| Tightening torque                                                                         | 0.22 Nm ... 0.25 Nm                           |

## Material specifications


### Material data - contact

|                                          |                                                                                  |
|------------------------------------------|----------------------------------------------------------------------------------|
| Note                                     | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                         | Cu alloy                                                                         |
| Surface characteristics                  | hot-dip tin-plated                                                               |
| Metal surface terminal point (top layer) | Tin (4 - 8 µm Sn)                                                                |
| Metal surface contact area (top layer)   | Tin (4 - 8 µm Sn)                                                                |

### Material data - housing

|                                                                   |              |
|-------------------------------------------------------------------|--------------|
| Color (Housing)                                                   | green (6021) |
| Insulating material                                               | PA           |
| Insulating material group                                         | I            |
| CTI according to IEC 60112                                        | 600          |
| Flammability rating according to UL 94                            | V0           |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850          |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775          |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C       |

## Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Pitch               | 3.81 mm                                                                              |
| Width [w]           | 21.82 mm                                                                             |
| Height [h]          | 11.1 mm                                                                              |
| Length [l]          | 16.1 mm                                                                              |

# MC 1,5/ 3-STF-3,81 - PCB connector



1827716

<https://www.phoenixcontact.com/pc/products/1827716>

## Mounting

|                       |                                      |
|-----------------------|--------------------------------------|
| Drive form screw head | Slotted (L)                          |
| Connection method     | Screw connection with tension sleeve |
| Drive form screw head | Slotted (L)                          |

## Flange

|                   |        |
|-------------------|--------|
| Tightening torque | 0.3 Nm |
|-------------------|--------|

## Mechanical tests

### Test for conductor damage and slackening

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

### Pull-out test

|                                                                             |                                         |
|-----------------------------------------------------------------------------|-----------------------------------------|
| Specification                                                               | IEC 60999-1:1999-11                     |
| Conductor cross section/conductor type/tractive force setpoint/actual value | 0.14 mm <sup>2</sup> / solid / > 7 N    |
|                                                                             | 0.14 mm <sup>2</sup> / flexible / > 7 N |
|                                                                             | 1.5 mm <sup>2</sup> / solid / > 40 N    |
|                                                                             | 1.5 mm <sup>2</sup> / flexible / > 40 N |

### Insertion and withdrawal forces

|                                     |             |
|-------------------------------------|-------------|
| Result                              | Test passed |
| No. of cycles                       | 25          |
| Insertion strength per pos. approx. | 6 N         |
| Withdraw strength per pos. approx.  | 4 N         |

### Torque test

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
|---------------|---------------------|

### Resistance of inscriptions

|               |                        |
|---------------|------------------------|
| Specification | IEC 60068-2-70:1995-12 |
| Result        | Test passed            |

### Polarization and coding

|               |                        |
|---------------|------------------------|
| Specification | IEC 60512-13-5:2006-02 |
| Result        | Test passed            |

### Visual inspection

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-1:2002-02 |
| Result        | Test passed           |

### Dimension check

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-2:2002-02 |
| Result        | Test passed           |

## Environmental and real-life conditions

# MC 1,5/ 3-STF-3,81 - PCB connector



1827716

<https://www.phoenixcontact.com/pc/products/1827716>

## Vibration test

|                        |                             |
|------------------------|-----------------------------|
| Specification          | IEC 60068-2-6:2007-12       |
| Frequency              | 10 - 150 - 10 Hz            |
| Sweep speed            | 1 octave/min                |
| Amplitude              | 0.35 mm (10 Hz ... 60.1 Hz) |
| Sweep speed            | 5g (60.1 Hz ... 150 Hz)     |
| Test duration per axis | 2.5 h                       |

## Durability test

|                                              |                       |
|----------------------------------------------|-----------------------|
| Specification                                | IEC 60512-9-1:2010-03 |
| Impulse withstand voltage at sea level       | 2.95 kV               |
| Contact resistance R <sub>1</sub>            | 1.3 mΩ                |
| Contact resistance R <sub>2</sub>            | 1.5 mΩ                |
| Insertion/withdrawal cycles                  | 25                    |
| Insulation resistance, neighboring positions | > 5 MΩ                |

## Climatic test

|                                   |                                                                           |
|-----------------------------------|---------------------------------------------------------------------------|
| Specification                     | ISO 6988:1985-02                                                          |
| Corrosive stress                  | 0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> /40 °C/1 cycle |
| Thermal stress                    | 100 °C/168 h                                                              |
| Power-frequency withstand voltage | 1.39 kV                                                                   |

## Shocks

|                 |                                   |
|-----------------|-----------------------------------|
| Specification   | IEC 60068-2-27:2008-02            |
| Pulse shape     | Semi-sinusoidal                   |
| Acceleration    | 30g                               |
| Shock duration  | 18 ms                             |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |

## Ambient conditions

|                                         |                                                     |
|-----------------------------------------|-----------------------------------------------------|
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Relative humidity (storage/transport)   | 30 % ... 70 %                                       |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |

## Electrical tests

### Thermal test | Test group C

|                            |                       |
|----------------------------|-----------------------|
| Specification              | IEC 60512-5-1:2002-02 |
| Tested number of positions | 20                    |

### Insulation resistance

|                                              |                       |
|----------------------------------------------|-----------------------|
| Specification                                | IEC 60512-3-1:2002-02 |
| Insulation resistance, neighboring positions | > 5 MΩ                |

### Air clearances and creepage distances |

|               |                     |
|---------------|---------------------|
| Specification | IEC 60664-1:2007-04 |
|---------------|---------------------|

# MC 1,5/ 3-STF-3,81 - PCB connector



1827716

<https://www.phoenixcontact.com/pc/products/1827716>

|                                                        |                                                       |
|--------------------------------------------------------|-------------------------------------------------------|
| Insulating material group                              | I                                                     |
| Comparative tracking index (IEC 60112)                 | CTI 600                                               |
| Rated insulation voltage (III/3)                       | 160 V                                                 |
| Rated surge voltage (III/3)                            | 2.5 kV                                                |
| minimum clearance value - non-homogenous field (III/3) | 1.5 mm                                                |
| minimum creepage distance (III/3)                      | 2 mm                                                  |
| Note on connection cross section                       | With connected conductor 1.5 mm <sup>2</sup> (solid). |
| Rated insulation voltage (III/2)                       | 160 V                                                 |
| Rated surge voltage (III/2)                            | 2.5 kV                                                |
| minimum clearance value - non-homogenous field (III/2) | 1.5 mm                                                |
| minimum creepage distance (III/2)                      | 1.5 mm                                                |
| Rated insulation voltage (II/2)                        | 320 V                                                 |
| Rated surge voltage (II/2)                             | 2.5 kV                                                |
| minimum clearance value - non-homogenous field (II/2)  | 1.5 mm                                                |
| minimum creepage distance (II/2)                       | 1.6 mm                                                |


# MC 1,5/ 3-STF-3,81 - PCB connector

1827716


<https://www.phoenixcontact.com/pc/products/1827716>



## Drawings

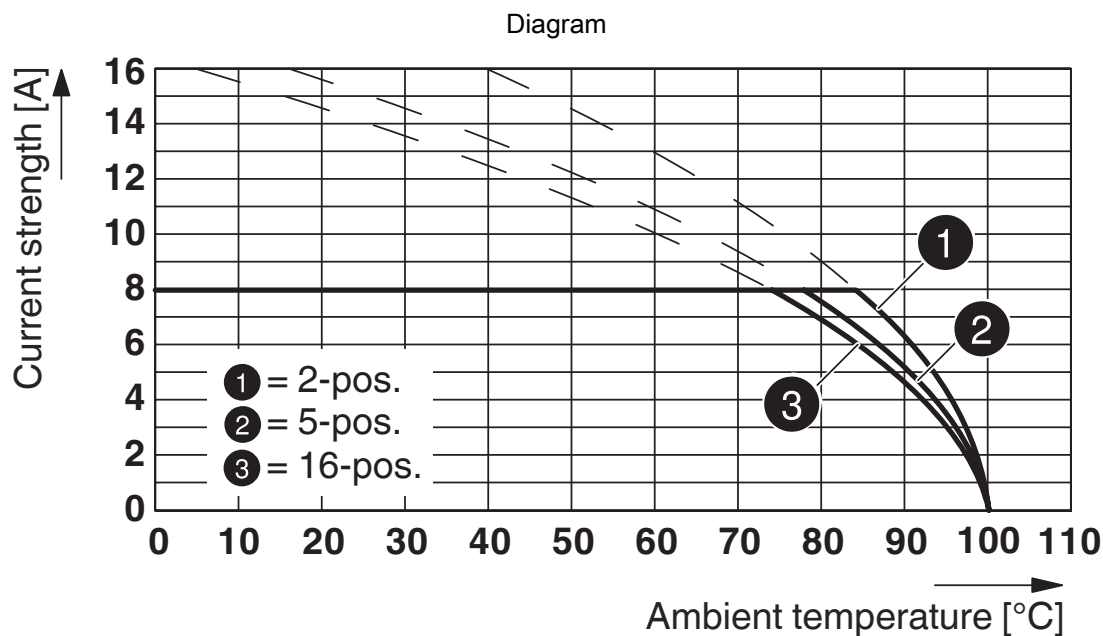

Type: MC 1,5/...-STF-3,81 with DFK-MC 1,5/...-GF-3,81 (with solder connection)

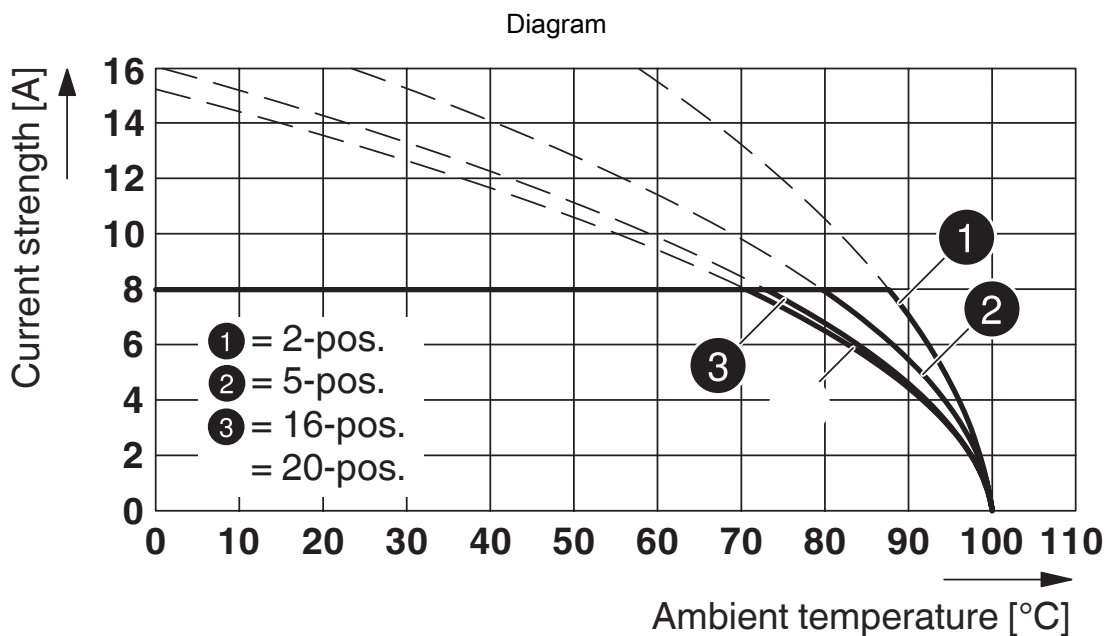


Type: MC 1,5/...-STF-3,81 with MC 1,5/...-GF-3,81 P26THR

# MC 1,5/ 3-STF-3,81 - PCB connector




1827716

<https://www.phoenixcontact.com/pc/products/1827716>

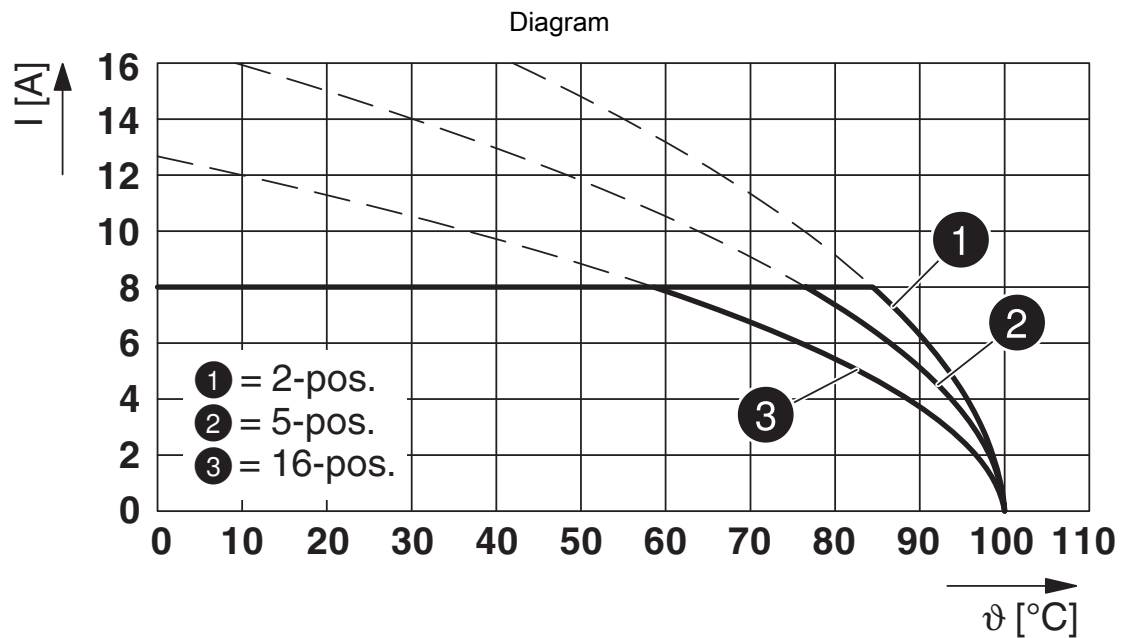

Type: MC 1,5/...-STF-3,81 with MCDV 1,5/...-GF-3,81

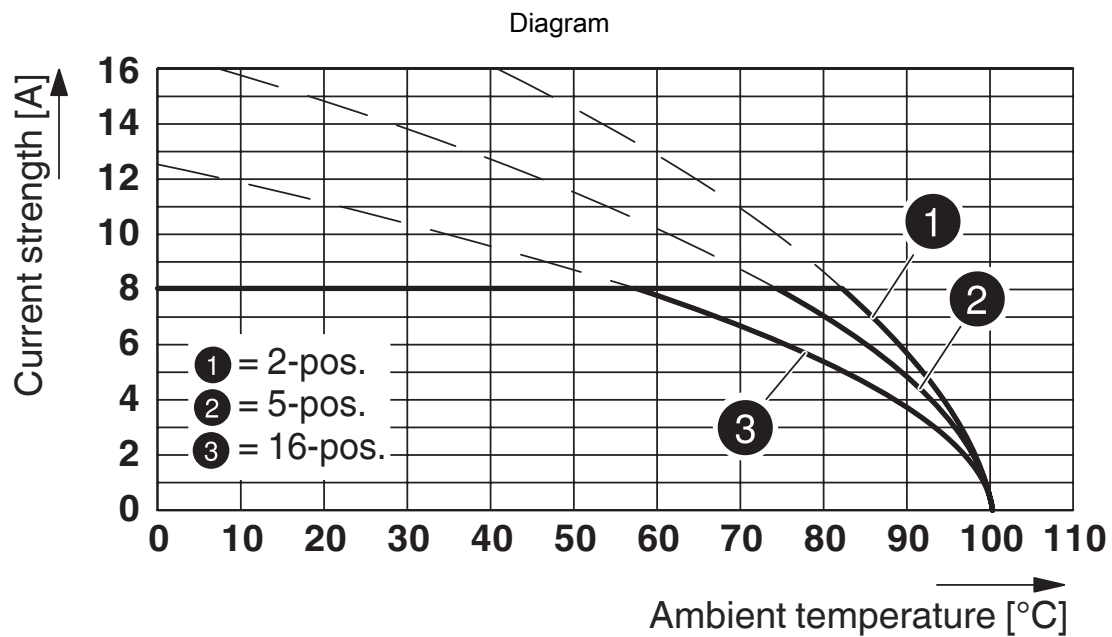


Type: MC 1,5/...-STF-3,81 with MCD 1,5/...-G1F-3,81

# MC 1,5/ 3-STF-3,81 - PCB connector




1827716

<https://www.phoenixcontact.com/pc/products/1827716>

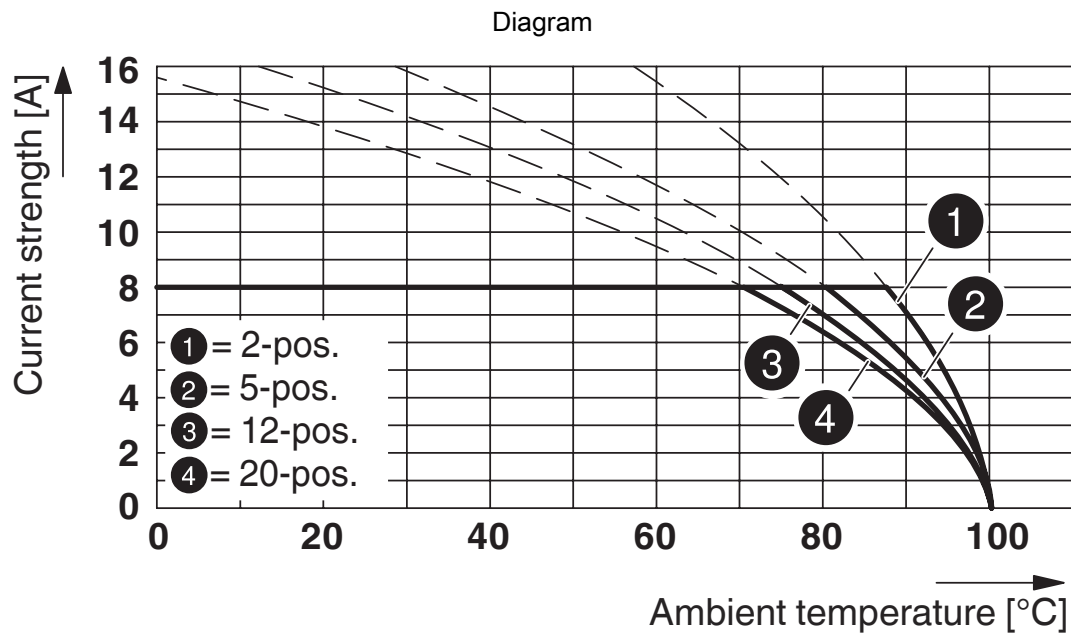

Type: MC 1,5/...-STF-3,81 with MC 1,5/...-GF-3,81

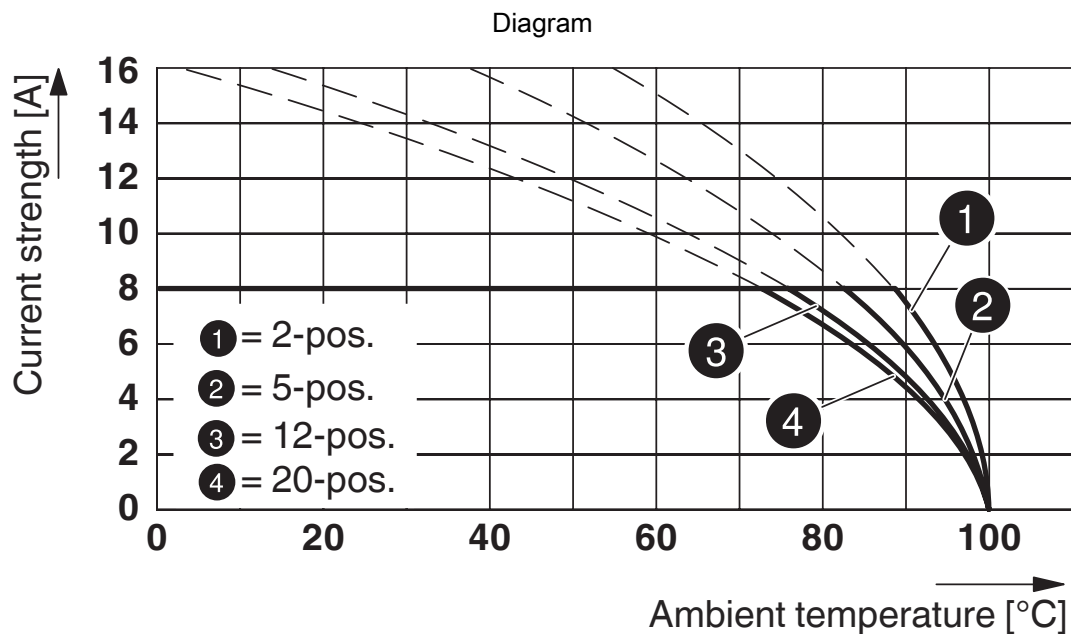


Type: MC 1,5/...-STF-3,81 with MCV 1,5/...-GF-3,81

# MC 1,5/ 3-STF-3,81 - PCB connector

1827716


<https://www.phoenixcontact.com/pc/products/1827716>

Diagram

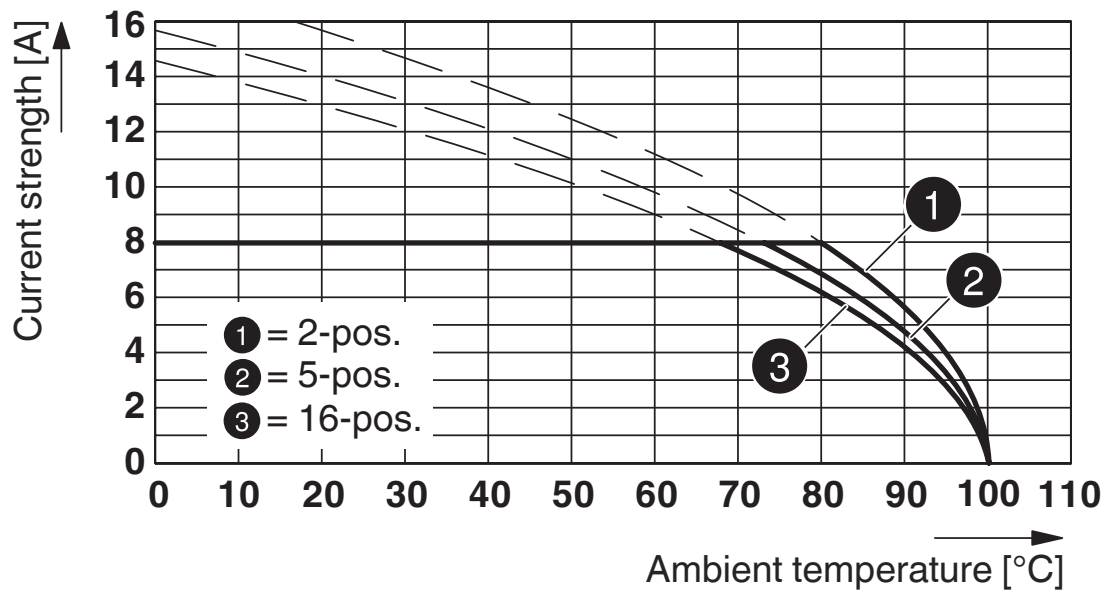

Type: MC 1,5/...-STF-3,81 with DFK-MC 1,5/...-GF-3,81 (with flat plug)

Dimensional drawing

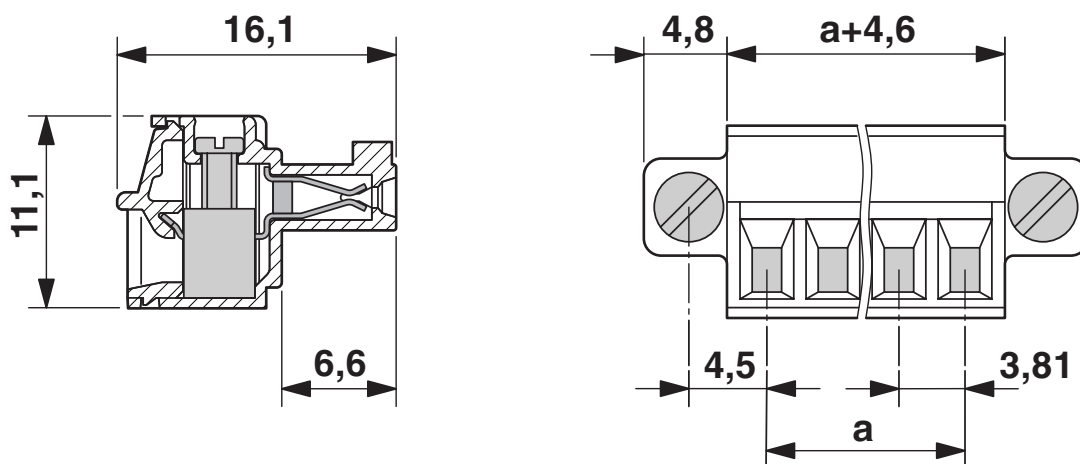


# MC 1,5/ 3-STF-3,81 - PCB connector




1827716

<https://www.phoenixcontact.com/pc/products/1827716>

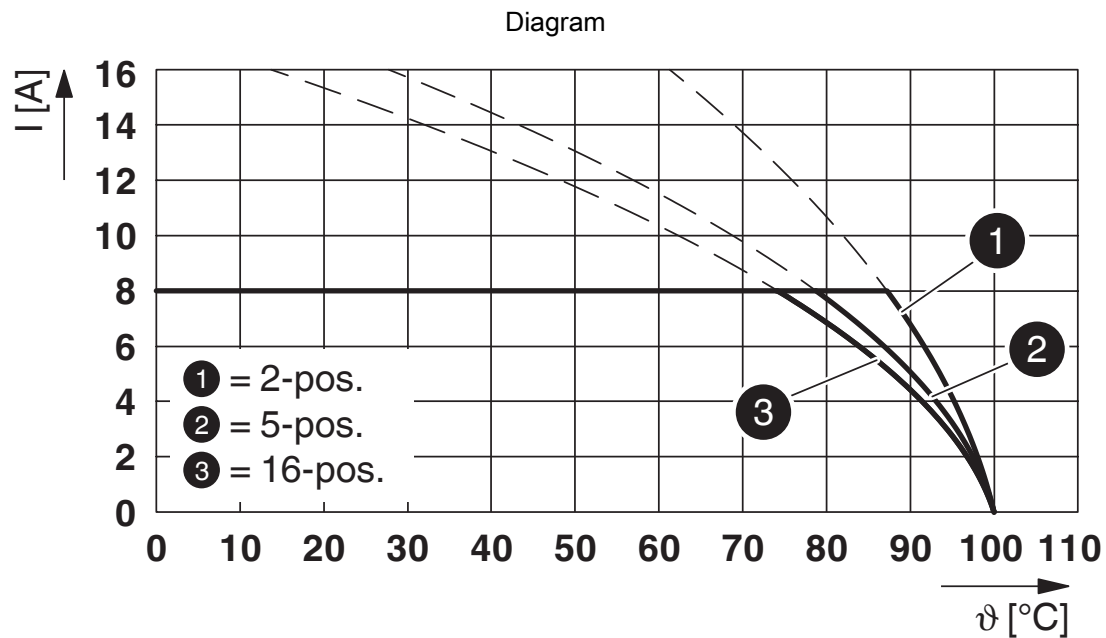

Type: MC 1,5/...-STF-3,81 with SMC 1,5/...-GF-3,81

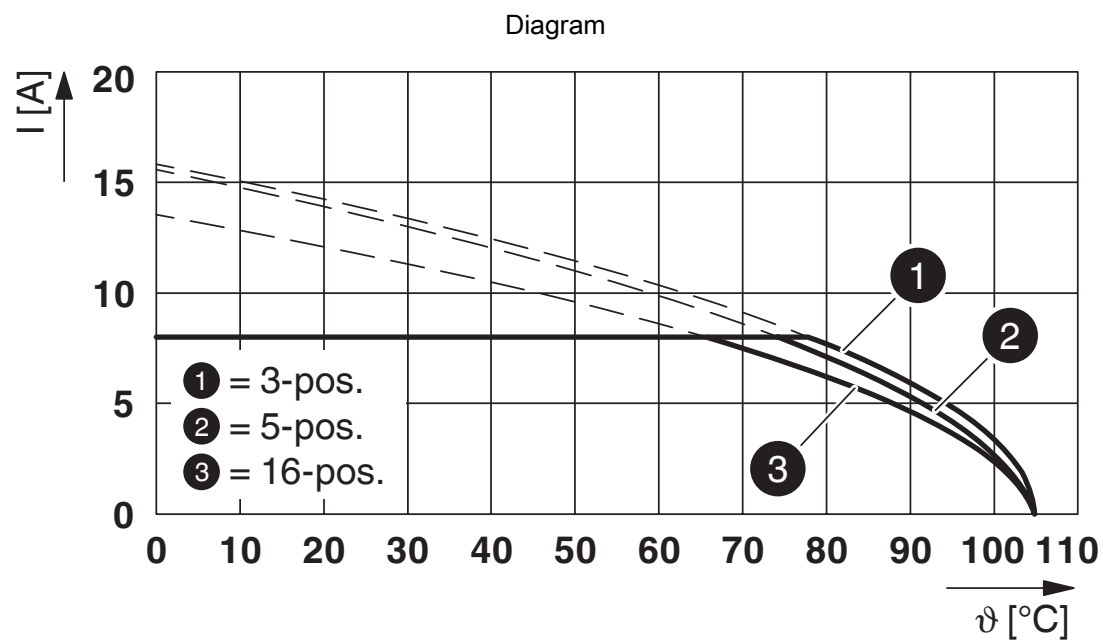


Type: MC 1,5/...-STF-3,81 with MCVK 1,5/...-GF-3,81


# MC 1,5/ 3-STF-3,81 - PCB connector

1827716

<https://www.phoenixcontact.com/pc/products/1827716>

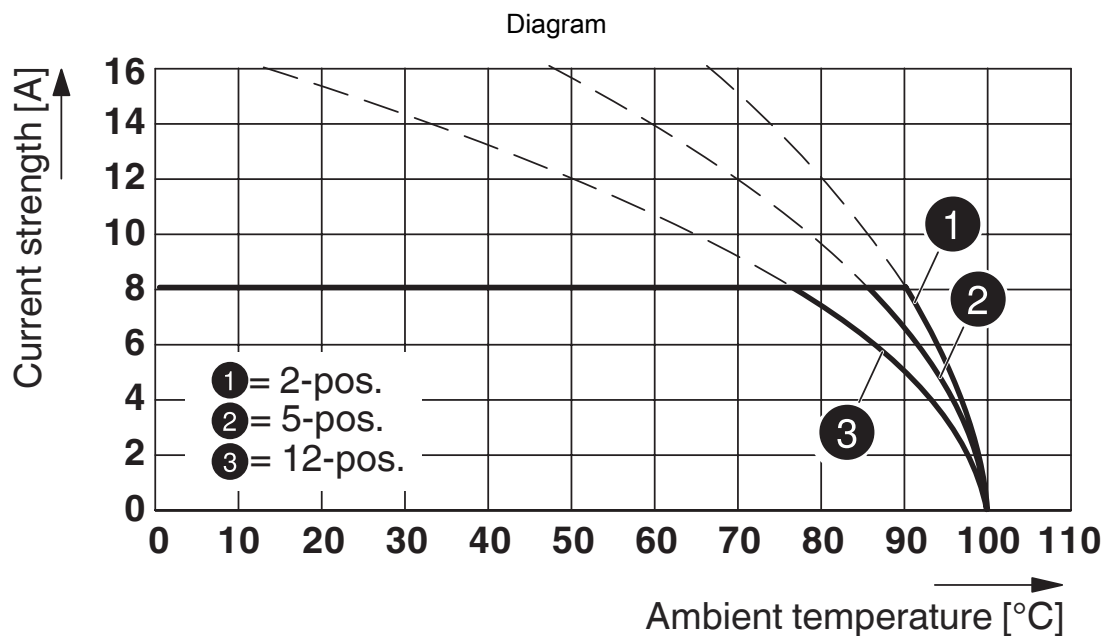

Type: MC 1,5/...-STF-3,81 with MCV 1,5/...-GF-3,81 P26 THR

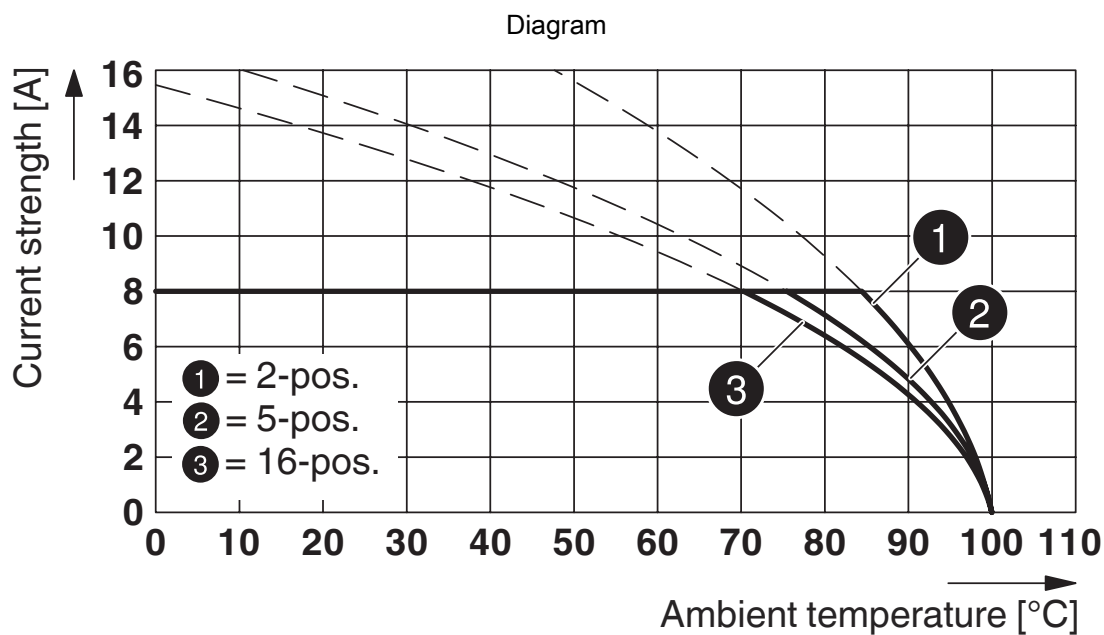


Type: MC 1,5/...-STF-3,81 with IMC 1,5/...-STGF-3,81

# MC 1,5/ 3-STF-3,81 - PCB connector




1827716

<https://www.phoenixcontact.com/pc/products/1827716>

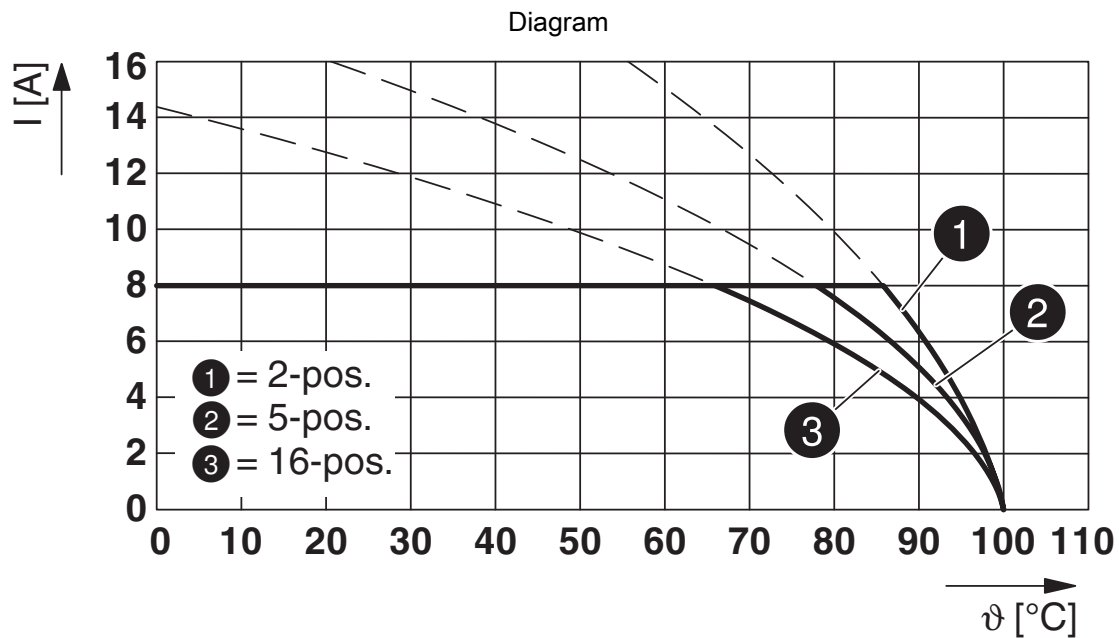

Type: MC 1,5/...-STF-3,81 with MCDV 1,5/...-G1F-3,81

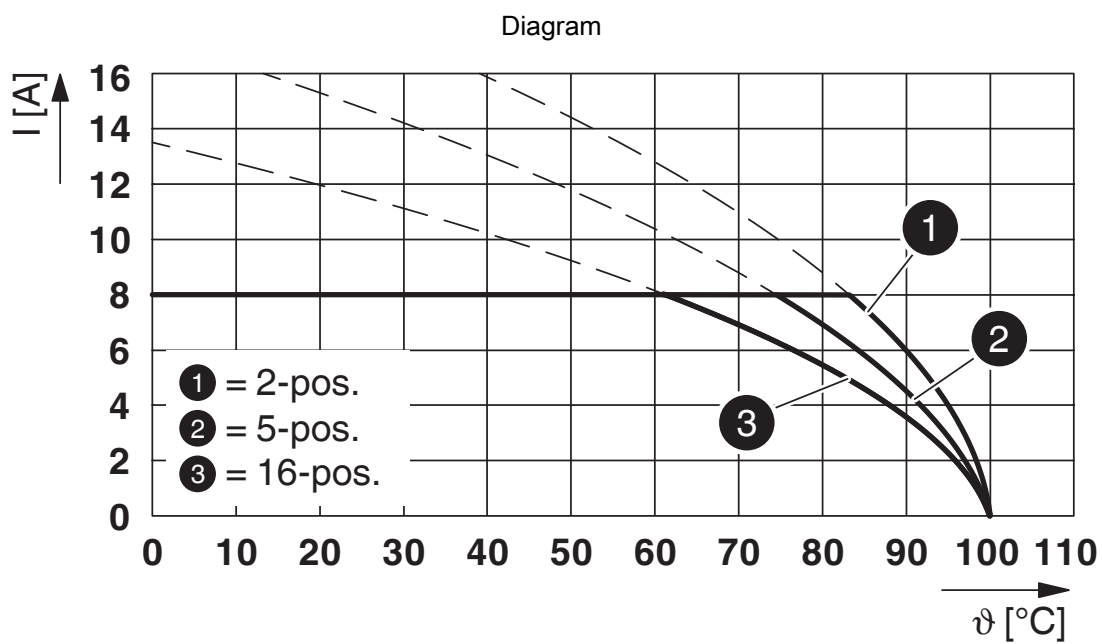

Type: MC 1,5/...-STF-3,81 with MCD 1,5/...-GF-3,81

# MC 1,5/ 3-STF-3,81 - PCB connector



1827716

<https://www.phoenixcontact.com/pc/products/1827716>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1827716>

| CSA<br>Approval ID: 13631 |                       |                       |                   |                             |
|---------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                           | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
| Use group B               | 300 V                 | 8 A                   | 28 - 16           | -                           |
| Use group D               | 300 V                 | 8 A                   | 28 - 16           | -                           |

| CB<br>IECEE CB Scheme<br>Approval ID: DE1-60987-B1B2 |                       |                       |                   |                             |
|------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                      | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
|                                                      | 160 V                 | 8 A                   | -                 | 0.2 - 1.5                   |

| EAC<br>Approval ID: B.01687 |  |  |  |  |
|-----------------------------|--|--|--|--|
|-----------------------------|--|--|--|--|

| cULus<br>cULus Recognized<br>Approval ID: E60425-20110128 |                       |                       |                   |                             |
|-----------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                           | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
| Use group B                                               | 300 V                 | 8 A                   | 30 - 14           | -                           |
| Use group D                                               | 300 V                 | 8 A                   | 30 - 14           | -                           |

| VDE<br>VDE Zeichengenehmigung<br>Approval ID: 40011723 |                       |                       |                   |                             |
|--------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                        | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
|                                                        | 160 V                 | 8 A                   | -                 | -                           |

# MC 1,5/ 3-STF-3,81 - PCB connector



1827716

<https://www.phoenixcontact.com/pc/products/1827716>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27460202 |
| ECLASS-12.0 | 27460202 |
| ECLASS-13.0 | 27460202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002638 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# MC 1,5/ 3-STF-3,81 - PCB connector

1827716

<https://www.phoenixcontact.com/pc/products/1827716>



## Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# MC 1,5/ 3-STF-3,81 - PCB connector

1827716

<https://www.phoenixcontact.com/pc/products/1827716>




## Accessories

### SK 3,81/2,8:FORTL.ZAHLEN - Marker card

0804109

<https://www.phoenixcontact.com/pc/products/0804109>



Marker card, white, labeled, horizontal: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... (99)100, mounting type: adhesive, for terminal block width: 3.81 mm, lettering field size: 3.81 x 2.8 mm

---

### SZS 0,4X2,5 VDE - Screwdriver

1205037

<https://www.phoenixcontact.com/pc/products/1205037>



Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip

## MC 1,5/ 3-STF-3,81 - PCB connector

1827716


<https://www.phoenixcontact.com/pc/products/1827716>



## KGG-MC 1,5/ 3 - Cable housing

1834356

<https://www.phoenixcontact.com/pc/products/1834356>



Cable housing, pitch: 3.81 mm, number of positions: 3, dimension a: 13.82 mm, color: green

---

## SK U/2,8 WH:UNBEDRUCKT - Marker card

0803883

<https://www.phoenixcontact.com/pc/products/0803883>



Marker card, Din A4, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, Office printing systems, mounting type: adhesive, for terminal block width: 210 mm, lettering field size: 186 x 2.8 mm, Number of individual labels: 3600

## MC 1,5/ 3-STF-3,81 - PCB connector

1827716

<https://www.phoenixcontact.com/pc/products/1827716>



## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/pc/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

## EBPL 2-3,81 - Insertion bridge

1733495

<https://www.phoenixcontact.com/pc/products/1733495>



Insertion bridge for plugs featuring a screw connection with a 3.81 mm pitch

# MC 1,5/ 3-STF-3,81 - PCB connector

1827716

<https://www.phoenixcontact.com/pc/products/1827716>



## EBPL 3-3,81 - Insertion bridge

1733505

<https://www.phoenixcontact.com/pc/products/1733505>


Insertion bridge for plugs featuring a screw connection with a 3.81 mm pitch



## MCV 1,5/ 3-GF-3,81 P14 THR - PCB header

1707227

<https://www.phoenixcontact.com/pc/products/1707227>



PCB headers, nominal cross section: 1.5 mm<sup>2</sup>, color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Pin, number of potentials: 3, number of rows: 1, number of positions: 3, number of connections: 3, product range: MCV 1,5/...-GF-THR, pitch: 3.81 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 1.4 mm, number of solder pins per potential: 1, plug-in system: COMBICON MC 1,5, Pin connector pattern alignment: Standard, locking: Screw locking, mounting: Threaded flange, type of packaging: packed in cardboard, For user information and design recommendations for through-hole reflow technology, go to: Downloads

# MC 1,5/ 3-STF-3,81 - PCB connector

1827716


<https://www.phoenixcontact.com/pc/products/1827716>



## MCV 1,5/ 3-GF-3,81 P26 THR - PCB header

1707641

<https://www.phoenixcontact.com/pc/products/1707641>



PCB headers, nominal cross section: 1.5 mm<sup>2</sup>, color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Pin, number of potentials: 3, number of rows: 1, number of positions: 3, number of connections: 3, product range: MCV 1,5/...-GF-THR, pitch: 3.81 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.6 mm, number of solder pins per potential: 1, plug-in system: COMBICON MC 1,5, Pin connector pattern alignment: Standard, locking: Screw locking, mounting: Threaded flange, type of packaging: packed in cardboard, For user information and design recommendations for through-hole reflow technology, go to: Downloads

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)