

## Printed-circuit board connector - FKCT 2,5/ 2-STF - 1909401

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB connector, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Push-in spring connection, color: green, contact surface: Tin



The figure shows a 10-position version of the product

### Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Intuitive use through colour coded actuation lever
- ✓ Quick and convenient testing using integrated test option
- ✓ Satisfies the more stringent safety requirements of "Ex e" protection according to IEC 60079-7 for potentially explosive areas
- ✓ Can be combined with the MSTB 2',5 range
- ✓ Intuitive locking mechanism prevents accidental disconnection

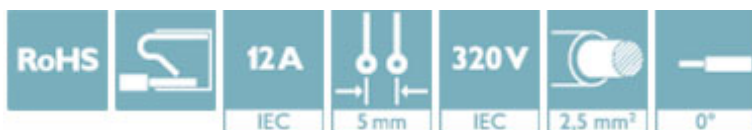

### Key Commercial Data

|              |                                                                                      |
|--------------|--------------------------------------------------------------------------------------|
| Packing unit | 50 pc                                                                                |
| GTIN         |  |
| GTIN         | 4017918188269                                                                        |

### Technical data

#### Dimensions

|              |          |
|--------------|----------|
| Length [ l ] | 25.73 mm |
| Width [ w ]  | 19.72 mm |
| Height [ h ] | 15 mm    |
| Pitch        | 5 mm     |
| Dimension a  | 5 mm     |

#### General

|                     |                           |
|---------------------|---------------------------|
| Range of articles   | FKCT 2,5/-STF             |
| Number of positions | 2                         |
| Connection method   | Push-in spring connection |

# Printed-circuit board connector - FKCT 2,5/ 2-STF - 1909401

## Technical data

### General

|                                        |                     |
|----------------------------------------|---------------------|
| Insulating material group              | I                   |
| Rated surge voltage (III/3)            | 4 kV                |
| Rated surge voltage (III/2)            | 4 kV                |
| Rated surge voltage (II/2)             | 4 kV                |
| Rated voltage (III/3)                  | 320 V               |
| Rated voltage (III/2)                  | 320 V               |
| Rated voltage (II/2)                   | 630 V               |
| Connection in acc. with standard       | EN-VDE              |
| Nominal current $I_N$                  | 12 A                |
| Nominal cross section                  | 2.5 mm <sup>2</sup> |
| Maximum load current                   | 12 A                |
| Insulating material                    | PA                  |
| Flammability rating according to UL 94 | V0                  |
| Internal cylindrical gage              | A2                  |
| Stripping length                       | 10 mm               |

### Connection data

|                                                                                         |                      |
|-----------------------------------------------------------------------------------------|----------------------|
| Conductor cross section solid min.                                                      | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.                                                      | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible min.                                                   | 0.2 mm <sup>2</sup>  |
| Conductor cross section flexible max.                                                   | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule without plastic sleeve min.              | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve max.              | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule with plastic sleeve min.                 | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule with plastic sleeve max.                 | 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG min.                                                        | 24                   |
| Conductor cross section AWG max.                                                        | 12                   |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1.5 mm <sup>2</sup>  |
| Minimum AWG according to UL/CUL                                                         | 26                   |
| Maximum AWG according to UL/CUL                                                         | 12                   |

### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CSA    |
| Flammability rating according to UL 94 | V0     |


### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# Printed-circuit board connector - FKCT 2,5/ 2-STF - 1909401

## Drawings

Dimensional drawing

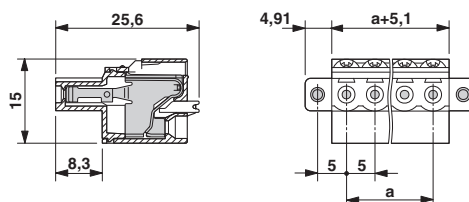

## Approvals

### Approvals

#### Approvals

CSA / IECCEB CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

#### Ex Approvals

### Approval details

|                            |                                                                                     |                                                                                                                                         |       |
|----------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------|
| CSA                        |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 13631 |
|                            | D                                                                                   | B                                                                                                                                       |       |
| Nominal voltage UN         | 300 V                                                                               | 300 V                                                                                                                                   |       |
| Nominal current IN         | 10 A                                                                                | 12 A                                                                                                                                    |       |
| mm <sup>2</sup> /AWG/kcmil | 24-12                                                                               | 24-12                                                                                                                                   |       |

|                            |                                                                                     |                                                           |                |
|----------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
| IECEE CB Scheme            |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-58978-B1B2 |
|                            |                                                                                     |                                                           |                |
| Nominal voltage UN         | 250 V                                                                               |                                                           |                |
| Nominal current IN         | 12 A                                                                                |                                                           |                |
| mm <sup>2</sup> /AWG/kcmil | 0.2-2.5                                                                             |                                                           |                |

## Printed-circuit board connector - FKCT 2,5/ 2-STF - 1909401

### Approvals

|                                            |                                                                                   |                                                                                                                                                                                                                |          |
|--------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/<br/>VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40004701 |
| Nominal voltage UN                         | 250 V                                                                             |                                                                                                                                                                                                                |          |
| Nominal current IN                         | 12 A                                                                              |                                                                                                                                                                                                                |          |
| mm²/AWG/kcmil                              | 0.2-2.5                                                                           |                                                                                                                                                                                                                |          |

|     |                                                                                   |         |
|-----|-----------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|-----------------------------------------------------------------------------------|---------|

|                    |                                                                                   |                                                                                                                                                       |                 |
|--------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19931011 |
|                    | D                                                                                 | B                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                             | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 10 A                                                                              | 10 A                                                                                                                                                  |                 |
| mm²/AWG/kcmil      | 26-12                                                                             | 26-12                                                                                                                                                 |                 |

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
 Flachsmarktstr. 8  
 32825 Blomberg  
 Germany  
 Tel. +49 5235 300  
 Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>