

DC/DC converters - QUINT4-PS/24DC/12DC/8/PT - 2910122

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Primary-switched DC/DC converter, QUINT, DIN rail mounting, SFB Technology (Selective Fuse Breaking), Push-in connection, input: 24 V DC, output: 12 V DC / 8 A

Product Description

QUINT DC/DC converter with maximum functionality

DC/DC converters alter the voltage level, regenerate the voltage at the end of long cables or enable the creation of independent supply systems by means of electrical isolation.

QUINT DC/DC converters magnetically and therefore quickly trip circuit breakers with six times the nominal current, for selective and therefore cost-effective system protection. The high level of system availability is additionally ensured, thanks to preventive function monitoring, as it reports critical operating states before errors occur.

Your advantages

- ✓ Most powerful output side: easy system expansion, reliable heavy load startup and miniature circuit breaker tripping
- ✓ Most comprehensive signaling: preventive function monitoring reports critical operating states before errors occur
- ✓ Free selection between Push-in and screw connection



Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4055626537474

Technical data

Input data

Input voltage range	18 V DC ... 32 V DC
Typical current consumption	5.5 A (24 V DC)
Mains buffering	typ. 17 ms (24 V DC)
Inrush current integral (I^2t)	< 0.02 A ² s
Input fuse	15 A (slow-blow, internal)

Insulation electric strength

Insulation voltage input/output	4 kV DC (type test)
---------------------------------	---------------------

DC/DC converters - QUINT4-PS/24DC/12DC/8/PT - 2910122

Technical data

Insulation electric strength

	2 kV DC (routine test)
Type test (IEC/EN 60950-1) A	2 kV DC
Type test (IEC/EN 60950-1) B	4 kV DC
Type test (IEC/EN 60950-1) C	0.5 kV DC
Type test (IEC/EN 60950-1) D	0.5 kV DC
Production test A	2 kV DC
Production test B	2 kV DC
Production test C	0.5 kV DC
Production test D	0.5 kV DC

Input connection data

Connection method	Push-in connection
Conductor cross section solid	0.2 mm ² ... 6 mm ²
Conductor cross section flexible	0.2 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.2 mm ² 4 mm ²
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.2 mm ² 4 mm ²
Conductor cross section AWG	24 ... 10
Stripping length	10 mm

Output data

Nominal output voltage (U _N)	12 V DC
Setting range of the output voltage (U _{Set})	12 V DC ... 15 V DC (> 12 V DC, constant capacity)
Nominal output current (I _N)	8 A
Static Boost (I _{Stat.Boost})	10 A
Dynamic Boost (I _{Dyn.Boost})	16 A (5 s)
Selective Fuse Breaking (I _{SFB})	48 A (15 ms)
Magnetic circuit breaker tripping	A1 ... A4 / B2 / C1 ... C2 / Z1 ... Z4
System deviation, static	< 1 % (change in load, static 10 % ... 90 %)
System deviation, dynamic	< 3 % (Dynamic load change 10 % ... 90 %, 10 Hz)
System deviation, input voltage change	< 0.1 % (change in input voltage ±10 %)
Short-circuit-proof	yes
No-load proof	yes
Residual ripple	< 13 mV _{pp}
Connection in parallel	yes
Connection in series	yes
Feedback resistance	≤ 25 V DC
Output overvoltage protection	≤ 18 V DC

Output connection data

Connection method	Push-in connection
Conductor cross section solid	0.2 mm ² ... 6 mm ²
Conductor cross section flexible	0.2 mm ² ... 6 mm ²

DC/DC converters - QUINT4-PS/24DC/12DC/8/PT - 2910122

Technical data

Output connection data

Flexible conductor cross section (ferrule with plastic sleeve)	0.2 mm ² 4 mm ²
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.2 mm ² 4 mm ²
Conductor cross section AWG	24 ... 10
Stripping length	10 mm

LED signaling

P _{Out}	> 100% (LED lights up yellow, output power > 240 W)
	> 75% (LED lights up green, output power > 180 W)
	> 50% (LED lights up green, output power > 120 W)
U _{Out}	> 0.9 x U _{Set} (LED lights up green)
	< 0.9 x U _{Set} (LED flashes green)
U _{In}	> 0.8 x U _{InNom} (LED off)
	< 0.8 x U _{InNom} (LED lights up yellow)

Signal contacts – signal output Out 1 (configurable)

Connection labeling	3.5 +
Digital	0 V DC
	24 V DC
	20 mA
Default	U _{IN} input voltage OK
Signal option	Output voltage
	Output current
	Output power
	Operating hours
	Early warning of high temperatures
	OVP voltage limitation active

Signal contacts – signal output Out 2 (configurable)

Connection labeling	3.6 +
Digital	0 V DC
	24 V DC
	20 mA
Default	Output power
Signal option	Output voltage
	Output current
	Operating hours
	Early warning of high temperatures
	OVP voltage limitation active
Analog	4 mA ... 20 mA ±5 % (Load ≤400 #)
Signal option	Output voltage
	Output current
	Output power

DC/DC converters - QUINT4-PS/24DC/12DC/8/PT - 2910122

Technical data

Signal contacts – signal output relay 13/14 (configurable)

Connection labeling	3.1, 3.2
Switch contact	floating
Maximum contact load	24 V DC
	1 A
	30 V AC
	0.5 A
Default	Output voltage
Signal option	Output current
	Output power
	Operating hours
	Early warning of high temperatures
	OVP voltage limitation active
	U _{IN} input voltage OK

Signal contacts – remote signal input (configurable)

Connection labeling	3.3 +
Function	Output power ON/OFF (remote)
Default	Output power ON (>40 kΩ/24 V DC/open bridge between REM and SGnd)

Signal contacts – signal ground SGnd

Connection labeling	3.4 +
Function	Signal ground
Reference potential	to OUT1, OUT2, REM

Signal connection data

Connection method	Push-in technology
Conductor cross section solid	0.2 mm ² ... 1 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.2 mm ² 0.75 mm ²
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.2 mm ² 1.5 mm ²
Conductor cross section AWG	24 ... 16

Reliability

MTBF (IEC 61709, SN 29500)	> 500000 h (40 °C)
----------------------------	--------------------

General data

Degree of protection	IP20
Protection class	Special with SELV input and output
Width	36 mm
Height	130 mm
Depth	125 mm
Weight	0.6 kg
Efficiency	typ. 91 % (24 V DC)

DC/DC converters - QUINT4-PS/24DC/12DC/8/PT - 2910122

Technical data

Ambient conditions

Ambient temperature (operation)	-25 °C ... 70 °C (> 60 °C Derating: 2.5 %/K)
Ambient temperature (start-up type tested)	-40 °C
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, non-condensing)
Maximum altitude	≤ 5000 m (> 2000 m, observe derating)
Degree of pollution	2
Overvoltage category EN 61010-1	II
Overvoltage category EN 62477-1	III

Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Noise emission	Additional basic standard EN 61000-6-5 (immunity in power station), IEC/EN 61850-3 (energy supply)
Noise immunity	Immunity according to EN 61000-6-1 (residential), EN 61000-6-2 (industrial), and EN 61000-6-5 (power station equipment zone), IEC/EN 61850-3 (energy supply)
Standards/regulations	EN 61000-4-2
Contact discharge	4 kV (Test Level 2)
Standards/regulations	EN 61000-4-3
Frequency range	80 MHz ... 1 GHz
Test field strength	10 V/m (Test Level 3)
Frequency range	1.4 GHz ... 2 GHz
Test field strength	3 V/m (Test Level 2)
Standards/regulations	EN 61000-4-4
Comments	Criterion B
Standards/regulations	EN 61000-4-6
Frequency range	0.15 MHz ... 80 MHz
Voltage	10 V (Test Level 3)
Conducted noise emission	EN 55016 EN 61000-6-4 (Class A)
Standards/regulations	EN 61000-4-8
	EN 61000-4-29
	EN 61000-4-9
	EN 61000-4-16
	EN 61000-4-18
Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
Standard – Safety extra-low voltage	EN 61010-1 (SELV)
	IEC 61010-2-201 (PELV)
EMC requirements, power plant	IEC 61850-3
	EN 61000-6-5
Shipbuilding approval	DNV GL
UL approvals	UL Listed UL 61010-1
	UL Listed UL 61010-2-201

DC/DC converters - QUINT4-PS/24DC/12DC/8/PT - 2910122


Technical data

Standards and Regulations


	UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D T4 (Hazardous Location)
Approval - requirement of the semiconductor industry with regard to mains voltage dips	EN 61000-4-29
ATEX	# II 3 G Ex ec ic nC IIC T4 Gc X
IECEX	IECEX SIQ 19.0004X
	Ex ec ic nC IIC T4 Gc
Overvoltage category (EN 61010-1)	II
Overvoltage category (EN 62477-1)	III

Drawings

Block diagram

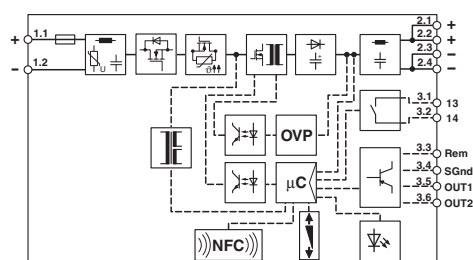

Schematic diagram

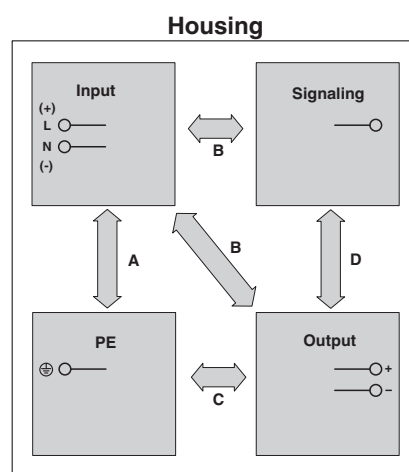

Approvals

Approvals

Approvals

DNV GL / UL Listed / cUL Listed / Type approved / UL Listed / cUL Listed / DNV GL / Type approved

Ex Approvals

Approval details

DNV GL



<http://exchange.dnv.com/tari/>

TAA000027S

DC/DC converters - QUINT4-PS/24DC/12DC/8/PT - 2910122

Approvals

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
Type approved			SI-SIQ BG 005/059
UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
DNV GL		http://exchange.dnv.com/tari/	TAA000027S
Type approved			SI-SIQ BG 005/059

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>