

## Base strip - DFK-MSTB 2,5/ 4-GF - 0710044

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 4, Pitch: 5 mm, Connection method: Solder/Slip-on connection, Color: green, Contact surface: Tin, Assembly: Direct mounting

The figure shows a 10-position version of the product

### Product Features

- ✓ Can be fixed in housing panels up to 6 mm thick using two M3 x 10 screws
- ✓ Outside: plug-in connection for corresponding MSTB 2,5 or FKC 2,5 plugs
- ✓ Headers for assembly in a device/housing panel
- ✓ Inside: solder or 2.8 mm slip-on plug-in connection that can be combined



### Key commercial data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                                    |
| GTIN                                 | <br>4 017918 005078 |
| Weight per Piece (excluding packing) | 5.64 GRM                                                                                                |
| Custom tariff number                 | 85366990                                                                                                |
| Country of origin                    | Germany                                                                                                 |

### Technical data

#### Dimensions

|             |       |
|-------------|-------|
| Pitch       | 5 mm  |
| Dimension a | 15 mm |

#### General

|                             |                     |
|-----------------------------|---------------------|
| Range of articles           | DFK-MSTB 2,5/...-GF |
| Insulating material group   | I                   |
| Rated surge voltage (III/3) | 4 kV                |

## Base strip - DFK-MSTB 2,5/ 4-GF - 0710044

### Technical data

#### General

|                                         |                     |
|-----------------------------------------|---------------------|
| Rated surge voltage (III/2)             | 4 kV                |
| Rated surge voltage (II/2)              | 4 kV                |
| Rated voltage (III/3)                   | 320 V               |
| Rated voltage (III/2)                   | 320 V               |
| Rated voltage (II/2)                    | 630 V               |
| Connection in acc. with standard        | EN-VDE              |
| Nominal current $I_N$                   | 12 A                |
| Nominal cross section                   | 2.5 mm <sup>2</sup> |
| Maximum load current                    | 12 A                |
| Insulating material                     | PA                  |
| Inflammability class according to UL 94 | V2                  |
| Number of positions                     | 4                   |

#### Connection data

|                                        |                     |
|----------------------------------------|---------------------|
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.     | 2.5 mm <sup>2</sup> |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup> |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min. | 24                  |
| Conductor cross section AWG/kcmil max  | 12                  |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27141190 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001283 |
| ETIM 4.0 | EC001283 |
| ETIM 5.0 | EC001283 |

## Base strip - DFK-MSTB 2,5/ 4-GF - 0710044

### Classifications

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

### Approvals

#### Approvals

#### Approvals

CSA / UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / IECCE CB Scheme / GOST / GOST / CSA / CCA / cULus Recognized

#### Ex Approvals

#### Approvals submitted

### Approval details

|                                                                                         |       |       |
|-----------------------------------------------------------------------------------------|-------|-------|
| CSA  |       |       |
|                                                                                         | B     | D     |
| Nominal current I <sub>N</sub>                                                          | 15 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                          | 300 V | 300 V |

|                                                                                                   |       |       |
|---------------------------------------------------------------------------------------------------|-------|-------|
| UL Recognized  |       |       |
|                                                                                                   | B     | D     |
| Nominal current I <sub>N</sub>                                                                    | 15 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                    | 300 V | 300 V |

## Base strip - DFK-MSTB 2,5/ 4-GF - 0710044

### Approvals

|                                                                                                                           |       |
|---------------------------------------------------------------------------------------------------------------------------|-------|
| VDE Gutachten mit Fertigungsüberwachung  |       |
| Nominal current I <sub>N</sub>                                                                                            | 12 A  |
| Nominal voltage U <sub>N</sub>                                                                                            | 250 V |

|                                                                                                  |       |       |
|--------------------------------------------------------------------------------------------------|-------|-------|
| cUL Recognized  |       |       |
|                                                                                                  | B     | D     |
| Nominal current I <sub>N</sub>                                                                   | 15 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                   | 300 V | 300 V |

|                                                                                                    |       |
|----------------------------------------------------------------------------------------------------|-------|
| IECEE CB Scheme  |       |
| Nominal current I <sub>N</sub>                                                                     | 12 A  |
| Nominal voltage U <sub>N</sub>                                                                     | 250 V |

|                                                                                          |
|------------------------------------------------------------------------------------------|
| GOST  |
|------------------------------------------------------------------------------------------|

|                                                                                          |
|------------------------------------------------------------------------------------------|
| GOST  |
|------------------------------------------------------------------------------------------|

|                                                                                         |       |       |
|-----------------------------------------------------------------------------------------|-------|-------|
| CSA  |       |       |
|                                                                                         | B     | D     |
| Nominal current I <sub>N</sub>                                                          | 10 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                          | 300 V | 300 V |

## Base strip - DFK-MSTB 2,5/ 4-GF - 0710044


### Approvals

|                                |       |
|--------------------------------|-------|
| CCA                            |       |
| Nominal current I <sub>N</sub> | 12 A  |
| Nominal voltage U <sub>N</sub> | 250 V |


|                                                                                                    |
|----------------------------------------------------------------------------------------------------|
| cULus Recognized  |
|----------------------------------------------------------------------------------------------------|

### Drawings

Drilling diagram

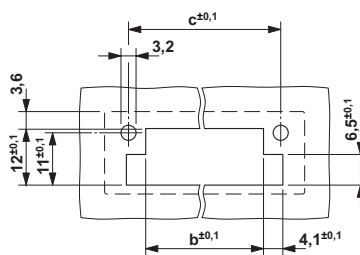

Dimensioned drawing

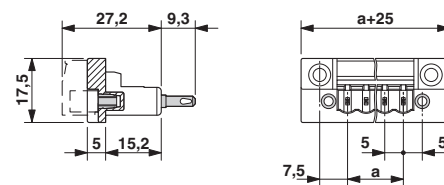

Dimension b: 2.7 mm + (no. of pos. x 5.0 mm)

Dimension c: Dim. b + 7.3 mm