

Sealing frame - CES-B24-HFFS-PLBK - 0801661

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sealing frame with locking latch, size B24, with flat gasket, for 10 small sleeves

Your advantages

- ✓ Can also be used for standard panel cutouts for heavy-duty industrial connectors

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 674119
GTIN	4046356674119
Weight per Piece (excluding packing)	180.000 g
Custom tariff number	85472000
Country of origin	Poland

Technical data

Dimensions

Length	147 mm
Width	58 mm
Height	20 mm

Ambient conditions

Degree of protection	IP54
Ambient temperature (operation)	-40 °C ... 120 °C (static)

General

Frame type	Sealing frame
------------	---------------

Sealing frame - CES-B24-HFFS-PLBK - 0801661

Technical data

General

Material	PA (halogen-free)
Flammability rating according to UL 94	V0
Color	black
Torque	1.8 Nm (Mounting screw, M4 (ISO 4762/DIN 912))
Note	Mounting screws not supplied as standard. The maximum width of the panel cutout must not exceed 51 mm (instead of 35 mm for heavy-duty industrial connectors).
Installation instructions	One large sleeve requires the space of 4 small sleeves, M4 mounting screws (ISO 4762/DIN 912), torque for mounting screw: 1.8 Nm
	A video tutorial on how to assemble the product can be found in the Downloads area, in the Video category.

Standards and Regulations

Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Sealing frame - CES-B24-HFFS-PLBK - 0801661


Dimensional drawing

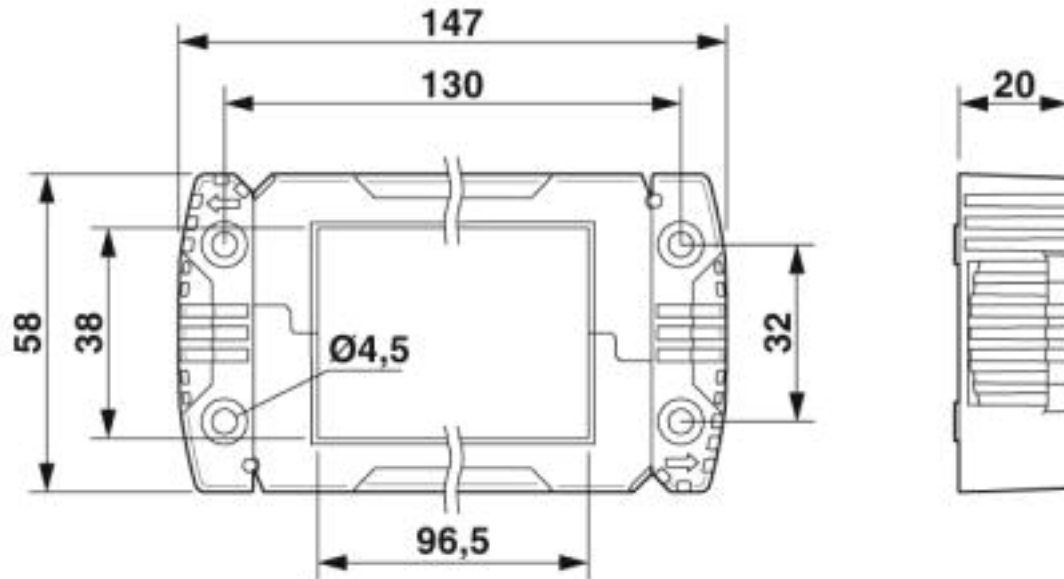

Dimensional drawing

Sealing frame - CES-B24-HFFS-PLBK - 0801661

Dimensional drawing

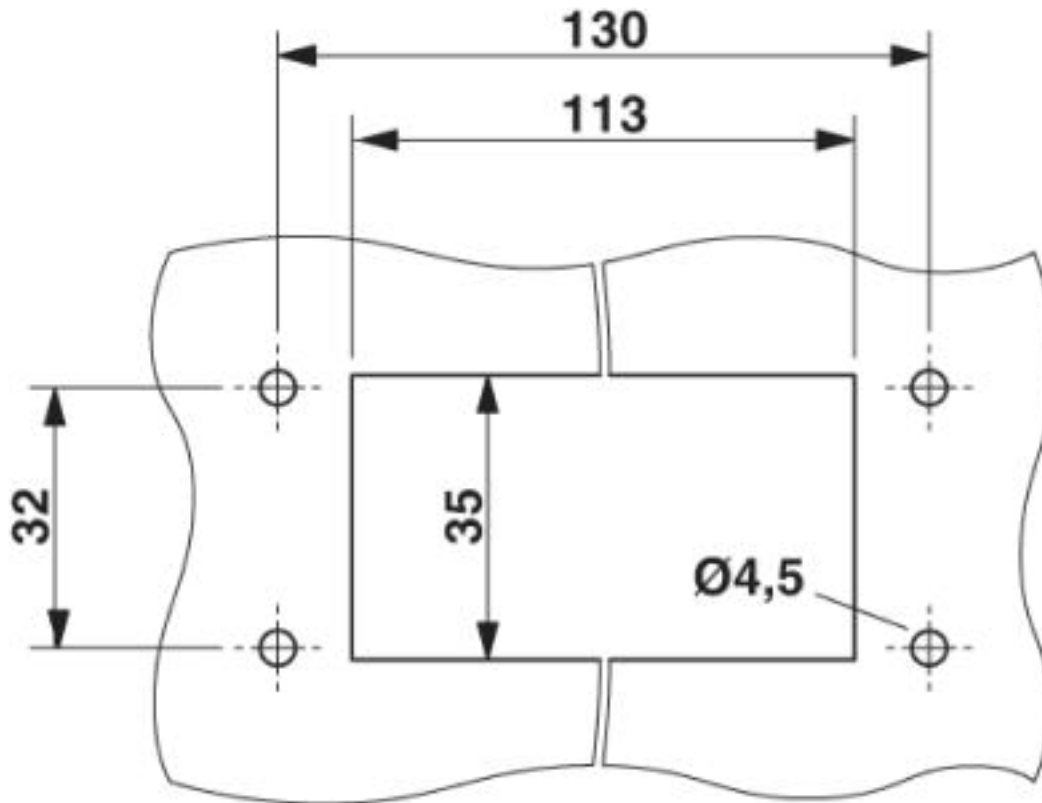

Mounting cutout

Classifications

eCl@ss

eCl@ss 4.0	23110100
eCl@ss 4.1	23110100
eCl@ss 5.0	23110100
eCl@ss 5.1	23110100
eCl@ss 6.0	23110100
eCl@ss 7.0	27142421
eCl@ss 8.0	27142421
eCl@ss 9.0	27142421

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002498

Sealing frame - CES-B24-HFFS-PLBK - 0801661

Classifications

ETIM

ETIM 5.0	EC000211
ETIM 6.0	EC000211
ETIM 7.0	EC000211

UNSPSC

UNSPSC 6.01	27113201
UNSPSC 7.0901	27113201
UNSPSC 11	27113201
UNSPSC 12.01	27113201
UNSPSC 13.2	27113201
UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261501

Approvals

Approvals

Approvals

GL / UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approval details

GL		https://approvalfinder.dnvgl.com/	1391415 HH
----	---	---	------------

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	NITW2.E255026
---------------	---	---	---------------

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	NITW8.E255026
----------------	---	---	---------------

Sealing frame - CES-B24-HFFS-PLBK - 0801661

Approvals

cULus Recognized



Accessories

Accessories

Seal

Flat gasket - CES-B24-WRG-BK - 0801727



Flat gasket made of NBR, size B24