
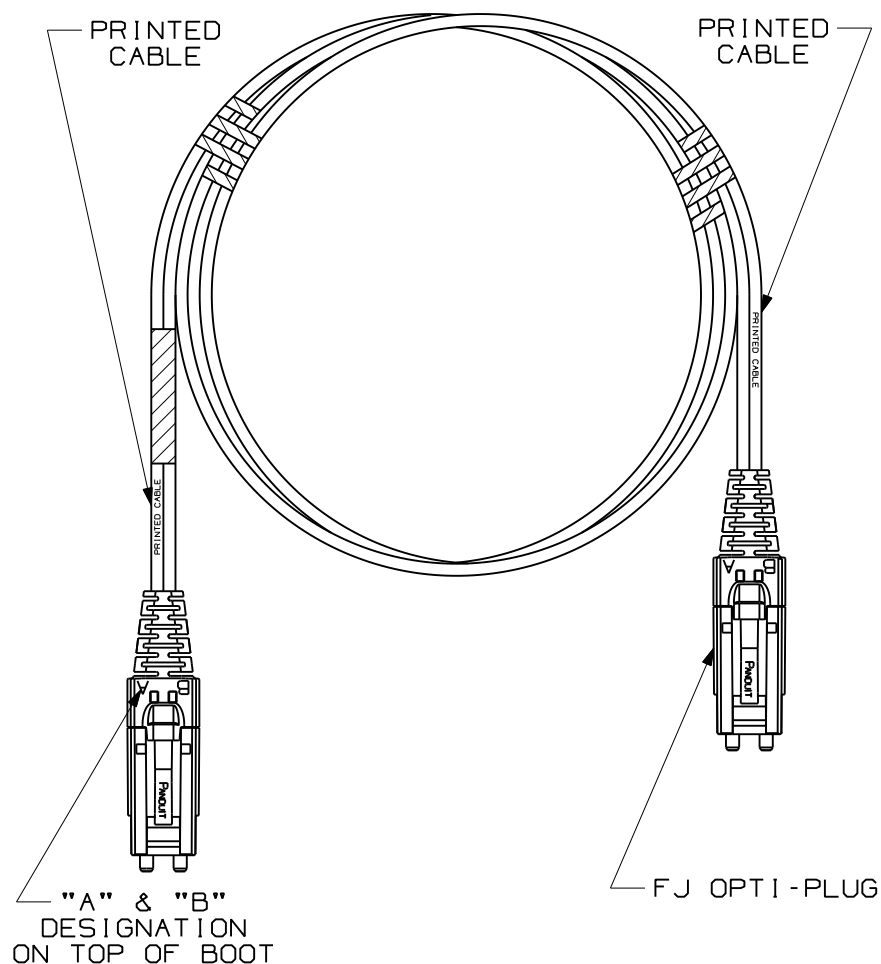


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

											DUPLEX FIBER OPTIC PATCH CORD OPTI-PLUG TO OPTI-PLUG CONFIGURATION CUSTOMER DRAWING				
												 TINLEY PARK, ILL 60477			
											 THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.		DRAWING FILENAME M02779BM_DC_00A.prt	
										DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) (.XX) ANGLES		SCALE NONE			
										DRAWN BY MC		PART NO. SEE TABLE, SHT. 2			
											DATE 05-11-07	DRAWING NO. 02779-19 (SHT. 1 of 2)		SIZE A	
REV	DATE	BY	CHK	DESCRIPTION		ECN	-	R	CUST	SUP	OTH	CHK'D			

