


PanView iQ™ (PViQ™) Interconnect Patch Cords – Enhanced

specifications

Category 6A/Class E_A UTP interconnect patch cords shall be constructed of 23 AWG stranded copper cable with a PViQ™ Patch Panel Plug on one end and a LED switch modular plug on the other end. Copper conductors in patch cable shall be twisted in pairs and separated by a quadrant separator. All four pairs shall be surrounded by MaTriX tape. An additional 26 AWG conductor pair shall surround the MaTriX tape to connect the LED switch plug to 9th and 10th contacts on the PViQ™ Patch Panel Plug. A flame retardant jacket will cover all conductors. The MaTriX tape shall suppress alien crosstalk and allow 10 Gb/s transmission. Patch cords shall be used in conjunction with intelligent patch panels and exclusively for interconnect architectures.



technical information

Category 6A/Class E_A channel performance: Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ANSI/TIA-568-C.2 Category 6A and ISO 11801 Class E_A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems

Certified component performance to the ANSI/TIA-968-A component standard for supporting 10GBASE-T transmission over twisted-pair cabling systems

Cable diameter: 0.295 in. (7.5mm) nominal

IEC compliance: Meets IEC 60603-7

PoE compliance: Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications

UL rated: Meets UL 1863

key features and benefits

Switch/server port detection Communicates connection status between switch/server and PViQ™ Patch Panels

100% performance tested Assurance that each patch cord will deliver the critical electrical performance requirements

Integral pair manager Optimizes performance and consistency by reducing untwist at the plug

Slender strain relief boot Provides easy access in high-density applications

Patented tangle free latch Prevents snags and provides easy release, saving time on frequent moves, adds, and changes

Ninth conductor continuity Provides continuity through the patch cord enabling the PanView iQ™ System to monitor connectivity without interfering with Ethernet performance

Variety of cable colors and lengths Meets individual length and color-coding requirements for greater system flexibility

LED indicator and switch LEDs aid in patch cord tracing and connectivity changes at the switch end; they also identify unauthorized removals or insertions

applications

Panduit's PViQ™ System Hardware, which includes intelligent patch panels, modules and cabling, seamlessly feeds information directly into the Physical Infrastructure Manager (PIM™) Software Platform to provide continuous real-time patch field monitoring and visibility of physical infrastructure connectivity for enhanced system reliability and security and capacity management.

PViQ™ Patch Panels support tiered installations to provide customers with the flexibility of installing passive connectivity that may be

upgraded to fully managed at a future time. PViQ™ Interconnect Patch Cords enable intelligent physical infrastructure management for interconnect architectures by verifying switch port connection and communicating with the system software, to allow improved network visibility. Interconnect patch cords can reduce patch panel requirements by 50% over cross-connect designs, reducing installation and deployment costs.

www.panduit.com

PanView iQ™ Interconnect Patch Cords – Enhanced – UTP CM Rated

Foot lengths: PVQ-EU6AC3BU*
Meter lengths: PVQ-EU6AC1MBU^

PanView iQ™ Interconnect Patch Cords – Enhanced – STP CM/LSZH Rated

Foot lengths: PVQ-ES6X3BU*
Meter lengths: PVQ-ES6X1MBU^

PanView iQ™ Interconnect Patch Cords – CM Rated

Foot lengths: PVQ-BIU6C3BU*
Meter lengths: PVQ-BIU6C1MBU**

PanView iQ™ Interconnect Patch Cords – LSZH Rated

Meter lengths: PVQ-BIU6L1MBU^

PanView iQ™ Patch Panels

Modular, intelligent, blank 24-port

Flat unshielded: PVQ-MIQPU24

Angled unshielded: PVQ-MIQAPU24

Flat shielded: PVQ-MIQPS24

Angled shielded: PVQ-MIQAPS24

PanView iQ™ Intelligence Modules

Panel manager (PM): PVQ-PM

Expansion

module (EM): PVQ-EM

NOTE: PM requires PanView iQ™ Power Supply (not included).

PanView iQ™ Power Supply

12 volt power supply

(North America): PVQ-PS12VDC-S

(Europe): PVQ-PS12VDC-E

(UK): PVQ-PS12VDC-U

(Japan): PVQ-PS12VDC-J

(China): PVQ-PS12VDC-C

PIM™ Software Platform and Modules

Base functionality module: PIM-BASE

Connectivity management module: PIM-CONNECT‡

Maintenance, support and warranty agreement: PIM-CAMA

Software and documentation: PIM-MEDIA

*For standard lengths other than 3 feet (5, 7, 10, 14, or 20) change the length designation in the part number to the desired length. For standard cable color other than BU (Blue), replace suffix BU with WH (White) at the end of the part number. For example, the part number for a white, 5-foot UTP patch cord is PVQ-EU6AC5WH. For example, the part number for a white, 5-foot STP patch cord is PVQ-ES6X5WH.

^For standard lengths other than 1 meter (2, 3, 5, or 10) change the length designation in the part number to the desired length. For standard cable color other than BU (Blue), replace suffix BU with WH (White) at the end of the part number. For example, the part number for a white 2 meter UTP patch cord is PVQ-ES6X2MWH. For example, the part number for a white 2 meter STP patch cord is PVQ-ES6X2MWH.


**For standard lengths other than 3 feet (5, 7, 10, 14, or 20) change the length designation in the part number to the desired length. For standard cable colors other than BU (Blue) replace suffix BU with GR (Green) at the end of the part number. For example, the part number for a green 10-foot CM patch cord is PVQ-BIU6C10GR.

***For standard lengths other than 1 meter (2, 3, 5, or 10) change the length designation in the part number to the desired length. For standard cable colors other than BU (Blue) replace suffix BU with GR (Green) at the end of the part number. For example, the part number for a green 10-meter CM patch cord is PVQ-BIU6C10MGR.

^^For standard lengths other than 1 meter (2, 3, 5, or 10) change the length designation in the part number to the desired length. For standard cable colors other than BU (Blue), replace suffix BU with WH (White) at the end of the part number. For example, the part number for a white 10-meter, LSZH patch cord is PVQ-BIU6L10MWH.

‡To order this module, add the appropriate letter to the end of the part number, based on the size of the installation: -S (<50 racks); -M (50-199 racks); -L (200-399 racks); -X (400+ racks). For example, the part number for the Connectivity Management Module for 250 racks is PIM-CONNECT-L.

PanView iQ™ (PViQ™) Interconnect Patch Cords – Enhanced

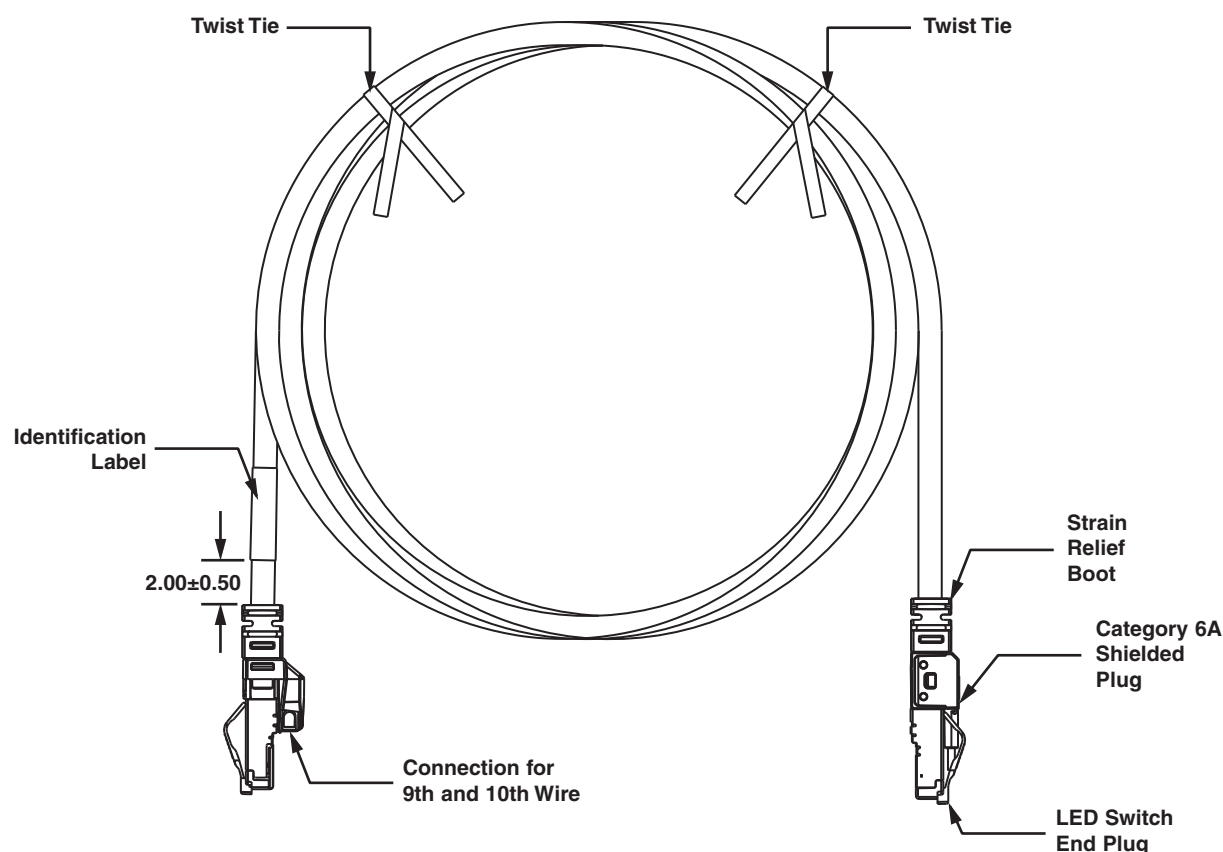

T568B Wiring Scheme

Plug Position	Cable Wire
1	White/Orange
2	Orange
3	White/Green
4	Blue
5	White/Blue
6	Green
7	White/Brown
8	Brown

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

©2012 Panduit Corp.
ALL RIGHTS RESERVED.
PVSP71--WW-ENG
Replaces WW-PVSP37
11/2012