


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

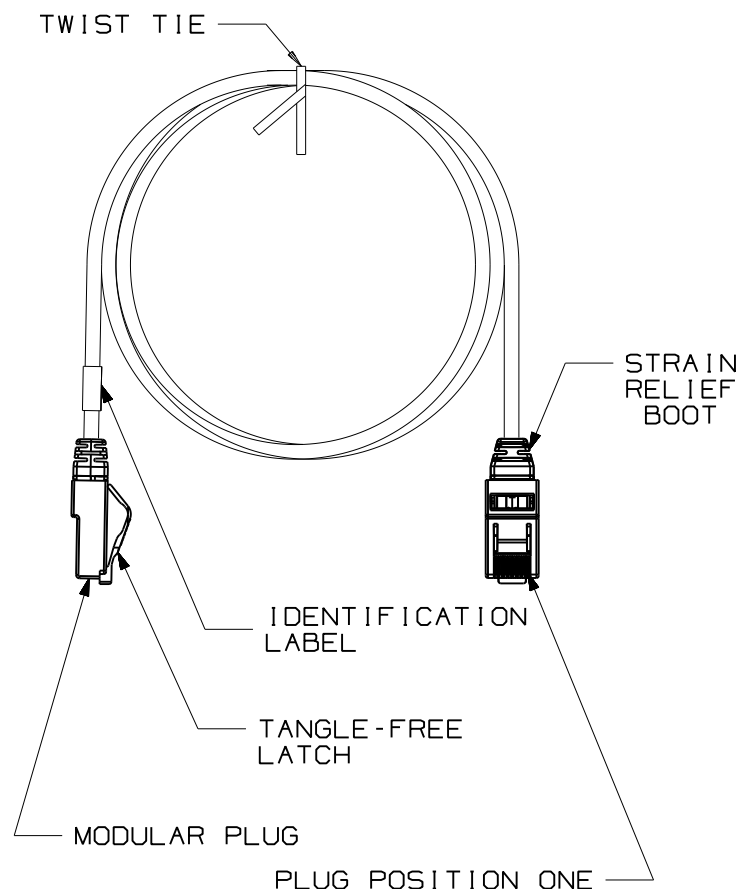

NOTES:

1. TX6 UTP 28AWG CAT6 PATCH CORDS
2. TERMINATED WITH (8 POSITION) MODULAR PLUGS AT BOTH ENDS PER T568B.
3. CONSTRUCTED WITH 28AWG STRANDED AND TINNED CONDUCTOR CAT6 UTP HALOGEN FREE (CM/LSZH) PATCH CABLE.
4. MATERIALS:
PLUG: POLYCARBONATE
CONTACTS: GOLD PLATED PHOSPHOR BRONZE
5. NOMINAL CABLE DIAMETER IS 0.150 IN (3.80MM).
6. ALL MATERIALS AND COMPOUNDS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS AMENDED.
7. 100% FACTORY TESTED FOR CAT 6 PATCH CORD PERFORMANCE.

T568B WIRING SCHEME	
PLUG POSITION	CABLE WIRE
1	WHITE ORANGE
2	ORANGE
3	WHITE GREEN
4	BLUE
5	WHITE BLUE
6	GREEN
7	WHITE BROWN
8	BROWN

CABLE COLORS	** = COLOR
OFF WHITE	--
BLACK	BL
BLUE	BU
RED	RD
YELLOW	YL
GREEN	GR
ORANGE	OR
VIOLET	VL

SEE SHEET 2 FOR PATCH CORD
LENGTHS AND PART NUMBERS

DRAWING FILENAME


11M215BG_DC02/00B

SIZE

A

TX6 UTP 28AWG COPPER PATCH
CORDS (CM/LSZH) CUSTOMER DRAWING

PANDUIT[®]
TINLEY PARK, IL 60487



THIRD ANGLE
PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES,
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.06(1.5)(.XXX) ±.010(.3)
(.XX) ± ANGLES ±

I.I. NUMBER

PRODUCT SPEC/ PKG SPEC

ASSY METHOD/ TEST METHOD

SCALE

NONE

PART NO.

UTP28SPXX**

DRAWING NO.

11M215BG-02
SHEET 1 OF 2


REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
1	5-22-12	BJN	MATO	RELEASED TO PRODUCTION	11M215BG-02	MATO	EJH		

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

TX6 UTP 28AWG
PATCH CORDS

PANDUIT PART NUMBER	MIN. CABLE LENGTH	PANDUIT PART NUMBER	MIN. CABLE LENGTH
UTP28SP1**	1 FT.	UTP28SP0.5M**	0.5 METER
UTP28SP2**	2 FT.	UTP28SP1M**	1 METER
UTP28SP3**	3 FT.	UTP28SP1.5M**	1.5 METER
UTP28SP4**	4 FT.	UTP28SP2M**	2 METER
UTP28SP5**	5 FT.	UTP28SP2.5M**	2.5 METER
UTP28SP6**	6 FT.	UTP28SP3M**	3 METER
UTP28SP7**	7 FT.	UTP28SP3.5M**	3.5 METER
UTP28SP8**	8 FT.	UTP28SP4M**	4 METER
UTP29SP9**	9 FT.	UTP29SP4.5M**	4.5 METER
UTP28SP10**	10 FT.	UTP28SP5M**	5 METER
UTP28SP11**	11 FT.	UTP28SP5.5M**	5.5 METER
UTP28SP12**	12 FT.	UTP28SP6M**	6 METER
UTP28SP13**	13 FT.	UTP28SP7M**	7 METER
UTP28SP14**	14 FT.	UTP28SP8M**	8 METER
UTP28SP15**	15 FT.	UTP28SP9M**	9 METER
UTP28SP16**	16 FT.	UTP28SP10M**	10 METER
UTP28SP17**	17 FT.	UTP28SP11M**	11 METER
UTP28SP18**	18 FT.	UTP28SP12M**	12 METER
UTP28SP19**	19 FT.	UTP28SP13M**	13 METER
UTP28SP20**	20 FT.	UTP28SP14M**	14 METER
UTP28SP25**	25 FT.	UTP28SP15M**	15 METER
UTP28SP30**	30 FT.		
UTP28SP35**	35 FT.		
UTP28SP40**	40 FT.		
UTP28SP45**	45 FT.		
UTP28SP50**	50 FT.		

1	5-22-12	BJN	MATO	SEE SHEET 1 FOR REVISIONS	11M215BG-02	MATO	EJH			
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	

MODEL FILENAME		SIZE
DRAWING FILENAME		A
11M215BG_DC02/00B		
TX6 UTP 28AWG COPPER PATCH CORDS (CM/LSZH) CUSTOMER DRAWING		
 TINLEY PARK, IL 60487		I.I. NUMBER
		PRODUCT SPEC/ PKG SPEC
 THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.06 (1.5) (.XXX) ±.010 (.3) (.XX) ± ANGLES ±	ASSY METHOD/ TEST METHOD
		SCALE NONE
DRAWN BY BJN		PART NO. UTP28SPXX**
DATE 5-11-12		DRAWING NO. 11M215BG-02 SHEET 2 OF 2
CHK'D MATO		
REVIEW DRAWING NUMBERS		
MAT'L		