Panasonic


3.0 mm×2.6 mm Double-action SMD Light Touch Switches

Type: **EVPAX**



- Features
- External dimensions: 3.0 mm×2.6 mm Height 0.7 mm
- Recommended Applications
- Camera function
 (Digital still cameras, Camcorders, Mobile phones, etc.)

■ Explanation of Part Numbers




Specifications

Туре		Snap action/Push-on type SPDT						
Electrical	Rating	10 μA 2 V DC to 20 mA 15 V DC (Resistive load)						
	Contact Resistance	500 mΩ max.						
	Insulation Resistance	100 MΩ min. (at 100 V DC)						
	Dielectric Withstanding Voltage	250 V AC for 1 minute						
	Dougoing	3 ms max. (ON)						
	Bouncing	20 ms max. (OFF)						
Mechanical	Operating Force (1st Action)	0.7 N						
	Operating Force (2nd Action)	2.0 N						
	Push Travel (1st Action)	0.07 mm						
	Push Travel (2nd Action)	0.16 mm						
	Push Strength	30 N (15 seconds)						
Endurance	Operating Life	100,000 cycles min.						
Operating Temperature		−40 °C to +70 °C						
Storage Temperature		-40 °C to +85 °C (Bulk)						
		-20 °C to +60 °C (Taping)						
Minimum Quantity/Packing Unit		8,000 pcs. Embossed Taping (Reel Pack)						
Quantity/Carto	n	40,000 pcs.						


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Panasonic


■ Dimensions in mm (not to scale)

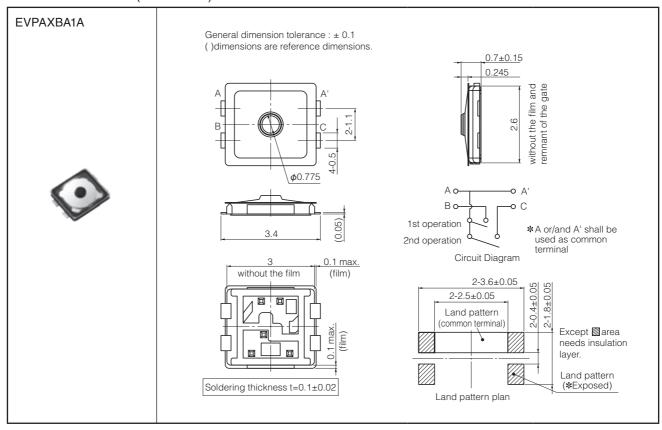

■ Recommended Reflow Soldering Conditions



Embossed Carrier Taping



Taping condition: Lack of products in the middle of taping should be one MAX, but total quantity specified in the specifications should be secured.

Peeling off strength of top tape: It should be within 0.2N to 1.0N at 165 degree in peeling off angle.

Joint of carrier tape: One joint per one reel may exist.

													Unit: mm
Part No.	Height	Α	В	С	D	E	F	G	Н	I	J	K	t
EVPAX	0.7	12.0±0.3	1.75±0.10	5.5±0.1	8.0±0.1	4.0±0.1	2.0±0.1	1.5±0.3	2.95±0.2	3.75±0.2	0.75±0.20	(10.25)	0.30+0.15

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Guidelines and cautions for using the product technical information and the products displayed on this material

- The products described on this material were designed and manufactured for standard applications such as general electronics devices, office equipment, data and communications equipment, measuring instruments, household appliances and audio-video equipment. For special applications in which quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or cause threat of personal injury (such as for aircraft and aerospace equipment, traffic and transport equipment, combustion equipment, medical equipment, accident prevention and anti-theft devices, and safety equipment), please use only after your company has sufficiently tasted our products' suitability for that application.
- •When using our products in equipment that requires a high degree of reliability, regardless of the application, it is recommended that you use protection circuits and redundancy circuits for equipment safety and test for safety.
- ■The products and product specifications described on this material are subject to change for improvement without prior notice. Therefore, be sure to request and confirm in advance the most current specifications, which explain the specifications in detail, before the final stage of your design, purchasing or use for any application.
- ●The technical information on this material provides examples of the products' typical operations and application circuits. It is not intended to guarantee the non-infringement of or grant license for intellectual property rights of this company or any third party.
- Permission must be obtained from the Japanese government if products, products specifications and technical information on this material that are subject to the "Foreign Exchange and Foreign Trade Law" are to be exported or taken out of Japan.
- ●The information contained on this material may not be reprinted or reproduced whether wholly or in part, without the prior written permission of Panasonic Corporation.

Safety Precautions

When using our products, no matter what sort of equipment they might be used for, be sure to confirm the applications and environmental conditions with our specifications in advance.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan industrial.panasonic.com/ac/e/



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic: EVP-AXBA1A