

SPECIFICATIONS					
PARAMETERS	VALUES	UNITS			
RATED VOLTAGE	12	Vdc			
OPERATING VOLTAGE RANGE	3 ~ 20	Vdc			
RATED CURRENT (MAX)	10	mA			
MINIMUM SPL @ 10 CM	106	dBA			
RESONANT FREQUENCY	2,800 ± 500	Hz			
TONE OR PULSE RATE	CONTINUOUS	0 pulse /sec			
OPERATING TEMPERATURE	-20 ~ +60	°C			
STORAGE TEMPERATURE	-30 ~ +70	°C			
HOUSING MATERIAL	ABS	-			
TERMINAL MATERIAL	LEAD WIRE	-			
WEIGHT	15	grams			

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY				
LTR	DES	CRIPTION	DATE	APPROVED
	RELEASED FR	ROM ENGINEERING	11/8/2005	
Α	REVISED TO INVENTO	R 3-D DRAWING TEMPLATE	10/10/2007	B.R.

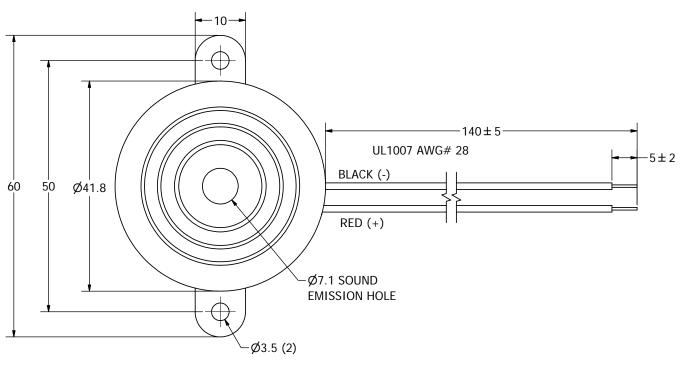

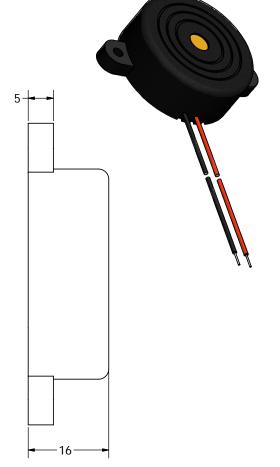

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:	CIZE	
DIMENSIONS ARE IN MILLIMETERS,	SIZE	
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A3	
AI-4228-TF-LW140-3-R.idw		

J.A.F.	11/8/2005	Е	3.R.
	pul	,	
400	A Division of Projects Unlin	nited	

Date

Designed by

Checked by

Date

11/9/2005

AI-4228-TF-LW140-3-R

Approved by

E.P.

Indicator | Edition | Sheet | 1/1

Date

11/9/2004 10/10/2007

Drawn Date

4