

Description: LTE Diversity FPC Antenna

PART NUMBER: W3907B0100

Series: Gemini



Features:

- 2G / 3G / 4G Div Ant for MiMo
- Used as pair for W3906B0100
- Can be used as Primary antenna
- 698-3600MHz
- Global LTE Bands:
 - B1-B23, B25-B29, B33-B42
 - N.A.; Europe, Asia (incl. Jap.)
- Foldable for tight spaces

Applications:

- Challenging RF Environments Demanding:
 - Highest Peak Gain
 - Lowest ECC (Envelope Correlation Coeff.).
- Matched to Radio Modules from:
 - Sierra Wireless, Telit, Huawei, Gemalto, uBlox, ZTE, and others.
- · Security, Video, Graphics
- IoT, SmartGrid, Meters, Remote Monitoring, Sensor Networks

All dimensions are in mm / inches

Issue: 1741

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Series: Gemini

TECHNICAL DATA SHEET

Description: LTE Diversity FPC Antenna

PART NUMBER: W3907B0100

ELECTRICAL SPECIFICATIONS

Frequency 698-960/1427.9-1510.9/1559-1610/

1695-2200/2300-2700/3400-3600 MHz

Nominal Impedance 50Ω

Return loss(698-960MHz) -6dB

Return loss(1427.9-1510.9/1559-1610/

1695-2200/2300-2700/3400-3600MHz) -7.5dB

Average Total Efficiency (698-960MHz) 55%

Average Total Efficiency (1427.9-1510.9MHz) 60%

Average Total Efficiency (1559-1610MHz) 60%

65% Average Total Efficiency (1695-2200MHz)

Average Total Efficiency (2300-2700MHz) 70%

65% Average Total Efficiency (3400-3600MHz)

Issue: 1741

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:





Series: Gemini

TECHNICAL DATA SHEET

Description: LTE Diversity FPC Antenna


PART NUMBER: W3907B0100

ELECTRICAL SPECIFICATIONS	
Peak Gain (698-960MHz)	2.9dBi
Peak Gain (1427.9-1510.9MHz)	1.7dBi
Peak Gain (1559-1610MHz)	1.8dBi
Peak Gain (1695-2200MHz)	3.4dBi
Peak Gain (2300-2700MHz)	3.8dBi
Peak Gain (3400-3600MHz)	4.2dBi
Radiation Pattern	Omni
Polarization	Linear
Power withstanding	3W

(*) All RF parameters measured on 2mm thick PC plate

Issue: 1741

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: LTE Diversity FPC Antenna

PART NUMBER: W3907B0100

Series: Gemini

MECHANICAL SPECIFICATIONS

Overall Length 110mm

Weight 1.4g

Antenna Color / Material BLACK FPC

Cable type AWG #32 1.13MM

Cable length (LTE) 100mm

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature $-40\sim+85^{\circ}$ C Storage Temperature $-40\sim+85^{\circ}$ C

RoHS Compliant Yes






Description: LTE Diversity FPC Antenna

PART NUMBER: W3907B0100

Series: Gemini

MECHANICAL DRAWING

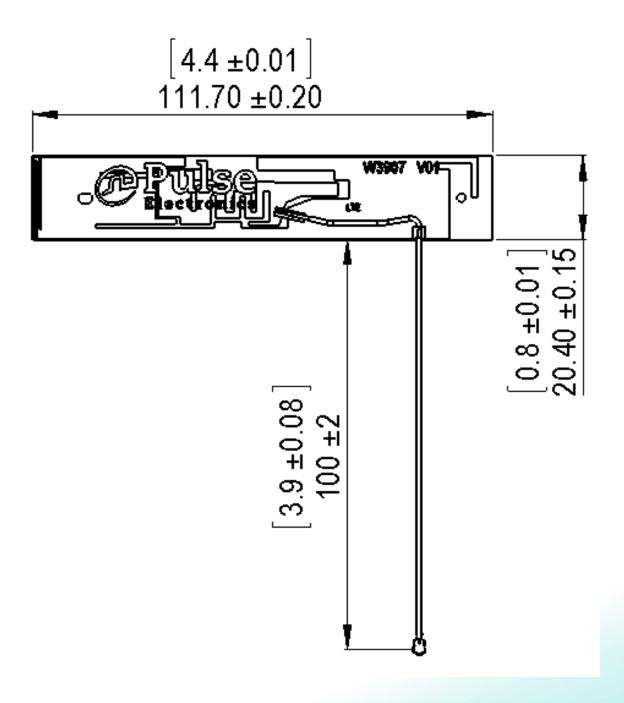



Description: LTE Diversity FPC Antenna

PART NUMBER: W3907B0100

Series: Gemini

CHARTS

Return Loss

-5.00 -10.00 -15.00 -25.00 -25.00 -25.00 -35







Description: LTE Diversity FPC Antenna


PART NUMBER: W3907B0100

Series: Gemini

CHARTS

Efficiency

Efficiency(%)

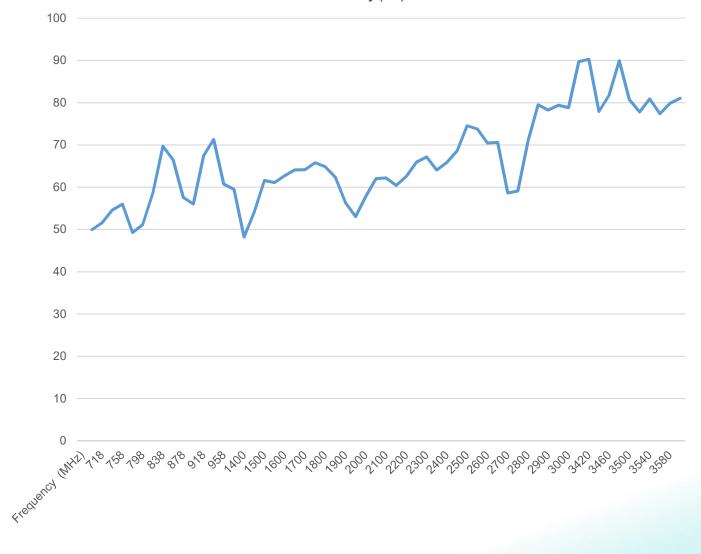



Description: LTE Diversity FPC Antenna


PART NUMBER: W3907B0100

Series: Gemini

CHARTS

Peak Gain

Peak Gain(dBi)

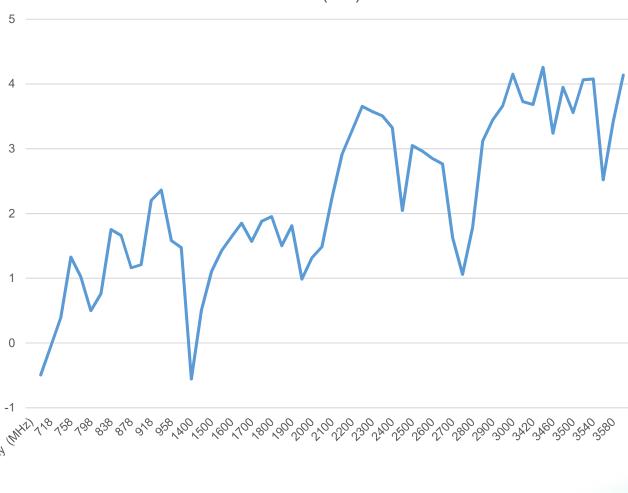







Description: LTE Diversity FPC Antenna


PART NUMBER: W3907B0100


Series: Gemini

CHARTS

Typical free space radiation pattern 698-960MHz (800MHz)

Elevation Plane

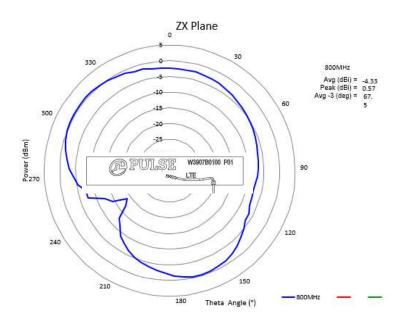

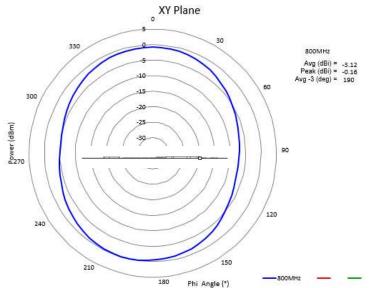



Description: LTE Diversity FPC Antenna


PART NUMBER: W3907B0100


Series: Gemini

CHARTS

Typical free space radiation pattern 1427.9-1510.9MHz (1450MHz)

Elevation Plane

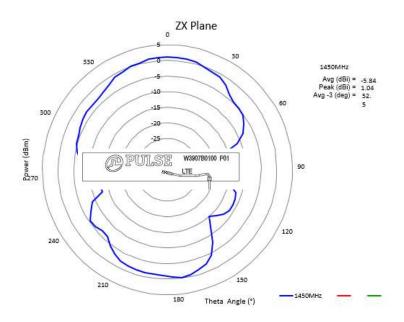

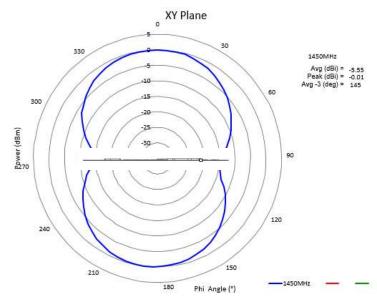



Description: LTE Diversity FPC Antenna


PART NUMBER: W3907B0100


Series: Gemini

CHARTS

Typical free space radiation pattern 1559-1610MHz (1570MHz)

Elevation Plane

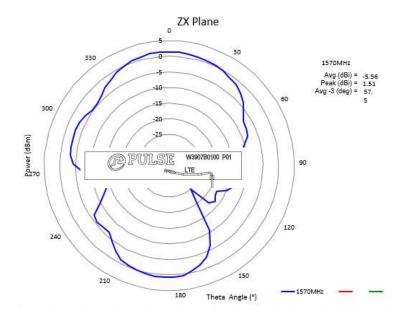

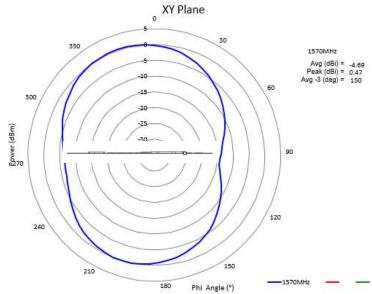



Description: LTE Diversity FPC Antenna


PART NUMBER: W3907B0100


Series: Gemini

CHARTS

Typical free space radiation pattern 1695-2200MHz (1930MHz)

Elevation Plane

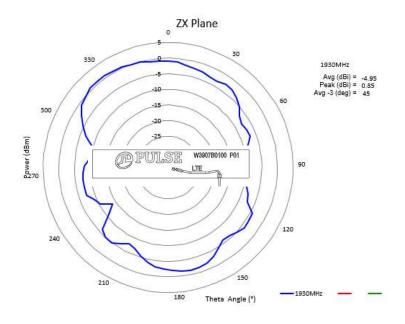

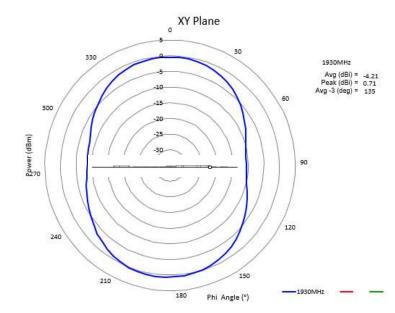



Description: LTE Diversity FPC Antenna

PART NUMBER: W3907B0100


Series: Gemini

CHARTS

Typical free space radiation pattern 2300-2700MHz (2390MHz)

Elevation Plane



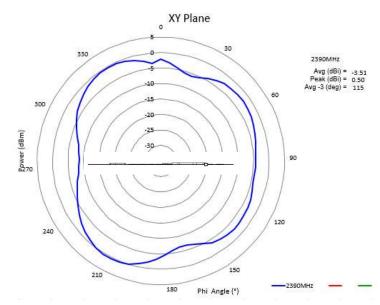



Description: LTE Diversity FPC Antenna


PART NUMBER: W3907B0100


Series: Gemini

CHARTS

Typical free space radiation pattern 3400-3600MHz (3400MHz)

Elevation Plane

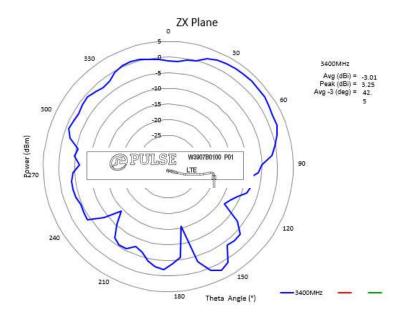

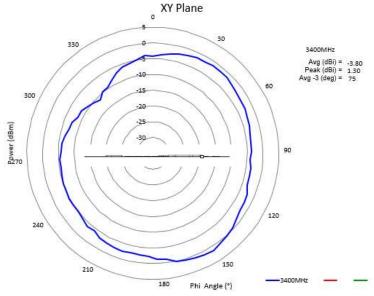



Description: LTE Diversity FPC Antenna

PART NUMBER: W3907B0100

Series: Gemini

PACKAGING

5pcs antenna per PE bag

400pcs PE bags per form bag

2pcs form bag per package box

Total 4000pcs per package box

Package box: 460mm*235mm*140mm